

| | | |
|------------------------------|---|--|
| Project | IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 > | |
| Title | Contribution on Network Reference Models | |
| Date Submitted | 2004-11-22 | |
| Source(s) | <p>Jose Puthenkulam, Prakash Iyer, Joey Chou, Gedon Rosner, Sanjay Bakshi Intel Corporation</p> <p>Nat Natarajan, Anand Bedekar, Rajeev Agrawal, Vijay Subramanian Motorola Inc.</p> <p>Phil Barber Broadband Mobile Technologies</p> | <p>Voice: (503)-264-6121 Email: jose.p.puthenkulam@intel.com</p> <p>Voice: (847)-632-6303 Email: Nat.Natarajan@motorola.com</p> <p>Voice: 972-365-6314 Email: pbarber@broadbandmobiletech.com</p> |
| Re: | IEEE 802.16 NetMan Task Group Call for Contributions for Table of Contents and Network Reference Models | |
| Abstract | A simplified Network Reference Model is proposed for the IEEE 802.16g specification along with a management architecture model. | |
| Purpose | This document proposes a Network Reference Model for the IEEE 802.16g specification | |
| Notice | This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein. | |
| Release | The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16. | |
| Patent Policy and Procedures | The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >. | |

Proposal for Network Reference Model

Jose Puthenkulam, Prakash Iyer, Joey Chou, Gedon Rosner, Sanjay Bakshi
Intel Corporation
Nat Natarajan, Anand Bedekar, Rajeev Agrawal, Vijay Subramanian
Motorola
Phillip Barber
Broadband Mobile Technologies

Introduction

This contribution proposes a network reference model for the IEEE 802.16g specification. In the last IEEE 802.16 interim session #33 in Seoul we had proposed the scope and architectural considerations for this project in contribution IEEE C802.16g-04/07 [1]. This contribution derives the proposed based on that work and other contributions [2][3][4][5][6]. The text for the introduction is derived from the PAR[7].

Concept

This contribution proposes a generic Network Reference Model that abstracts specific implementation variations of the 802.16 network to enable capturing the key management and control functionality that are needed for the efficient operation of the air interface. Any structural considerations of the various entities in the network other than the 802.16 BS and SS/MSS are to be considered outside the scope of the 802.16g specification. Procedures that enable management and control interactions between the MAC and PHY layers of the 802.16 devices and such network entities however are in scope. An abstracted network reference model is presented to clearly depict the interfaces that are assumed to be in scope of the specification.

Proposed Text

Adopt the following text into the initial working document.

1 Introduction

1.1 Scope

This document provides enhancements to the MAC and PHY management entities of IEEE Standard 802.16-2004, as amended by P802.16e, to create standardized procedures and interfaces for the management of conformant 802.16 devices.

1.2 Purpose

The purpose of this project is to specify (for conformant 802.16 equipment) PHY/MAC/CS layer primitives to enable interoperable and efficient management of network resources and efficient handover procedures and to standardize management plane behavior in 802.16 fixed and mobile devices.

2 Overview

The 802.16 devices within the purview of this specification can include 802.16-2004 subscriber stations (SS) or 802.16e mobile subscriber stations (MSS) or base stations (BS). As the 802.16 devices may be part of a larger network and therefore would require interfacing with entities for management and control purposes, this document assumes a Network Control and Management System (NCMS) abstraction that interfaces with the base stations. The NCMS abstraction allows the PHY/MAC/CS layers specified in 802.16 to be independent of the network architecture, the transport network, and the protocols used at the backend and therefore allows greater flexibility on the network side. Any necessary inter-BS coordination is handled through the NCMS. This specification will only describe procedures for management and control interactions between the MAC/PHY/CS layers of the 802.16 devices and the NCMS. The details of the various entities that form the Network Control and Management System are outside the purview of this specification. An abstracted network reference model is presented to clearly depict the interfaces that are assumed to be in scope of the specification.

2.1 Network Reference Model

Figure 1 describes a network reference model along with the interfaces that are within the scope of this specification. Multiple SS or MSS may be attached to a BS. The SS communicate to the BS over the U interface using a Primary Management Connection or a Secondary Management Connection. MSS typically only utilize the Primary Management Connection over the U interface for management and related control functions.

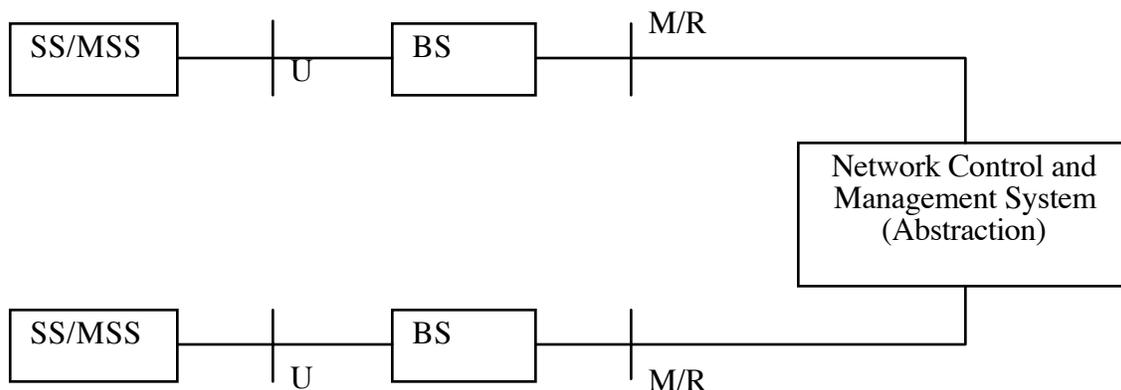


Figure 1: Logical Network Reference Model (Informational)

2.1.1 Network Control and Management System (NCMS)

This abstraction is detailed in figure 2 to show the different entities that make up such a Network Control and Management System. The exact functionality of these entities and their services is outside the scope of this specification but shown here for illustration purposes and to better enable the description of the management and control procedures.

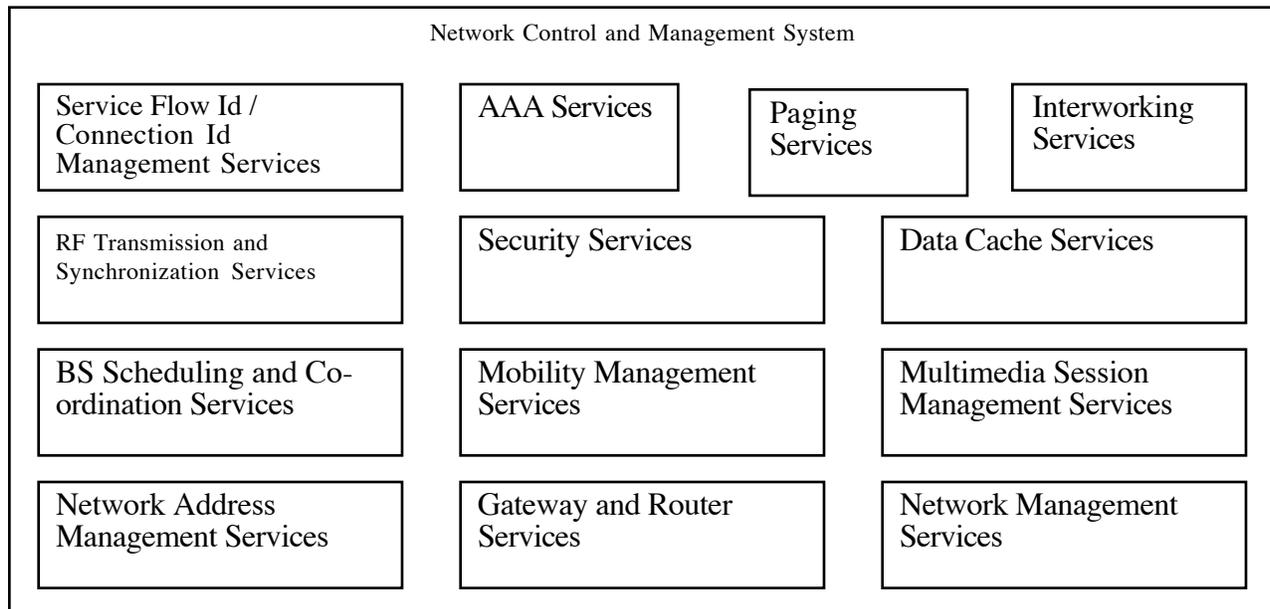


Figure 2: Illustration of the Network Control and Management System (Informational)

2.1.2 SS/MSS and BS Interface

This U interface may be implemented using either a primary management connection or a secondary management connection

2.1.3 BS and NCMS Interface

This interface is logically decomposed in to two parts: the M interface used for Management procedures alone and the R interface used for Control plane procedures that to support handovers, security context management, radio resource management, and low power operations (such as Idle mode and paging functions). Protocol procedures on both M and R interfaces are described in a transport independent manner.

The M interface may include messages for procedures related to:

- System configuration
- Monitoring Statistics
- Notifications/Triggers

The R interface may include the messaging required for procedures related to:

- Handovers (e.g. notification of HO request from MSS, etc.)
- Idle mode mobility management (e.g. Mobile entering idle mode)
- Subscriber and session management (e.g. Mobile requesting session setup)
- Radio resource management, etc.

The interactions over the R interface can be bi-directional and not necessarily master-slave with the NCMS acting as master. The interaction may be of a request-response nature, in which a request from one side triggers a procedure on the other side in order to generate the response.

3 References

- [1] IEEE C802.16g-04/07, 802.16g Scope and Architectural Considerations (Jose Puthenkulam, Prakash Iyer, 04/08/29)
- [2] IEEE C802.16g-04/06, Operation Support System Interface Specification for 802.16 fixed Wireless Systems (Radu Selea, Bogdan Moldoveanu, 04/08/26)
- [3] IEEE C802.16g-04/05, The type of MIB and process of management by EMS (Chi-Man Lee, Ki-Jun Lee, Dong-Cheol Lee, 04/08/20)
- [4] IEEE C802.16g-04/04, The issues related with Roaming (Ki-Jun Lee, Dong-Cheol Lee, Chi-Man Lee, 04/08/20)
- [5] IEEE C802.16g-04/02, The scope of IEEE 802.16g (Min-Sung Kim, Yongjoo Tcha, Seong-Choon Lee, 04/08/17)
- [6] IEEE C802.16g-04/01, 802.16 Accounting based on IEEE 802.1X Accounting (Dongkie Lee, DongIl Moon, DongRyul Lee, JongKuk Ahn, KangIl Koh, Sihun Ryu, Sungho Ha, 04/08/17)
- [7] IEEE 80216-04_35r4, 802.16g PAR, August 12, 2004