

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Proposal for BS Related NRM Definitions	
Date Submitted	2006-01-05	
Source(s)	Zou Lan Wu Jian Jun Huawei Technologies. No.98,Lane91, Eshan Road, Pudong , Shanghai, China Pudong Lujiazui Software Park	Voice: +86-21-68644808-24657 Fax: +86-21-50898375 Mailto: zlan@huawei.com
Re:	Contribution to IEEE 802.16g	
Abstract	This contribution proposed the BS NRM Definition of 802.16g	
Purpose	Adoption	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Proposal for BS Related Objects NRM Definitions

Huawei Technologies.

Introduction

This contribution proposes to add BS related objects NRM definitions.

Proposed Text

14.3.1.1 Information entities imported and local labels:

Table 450—Information entities imported and local labels

Label reference	Local label
information object class, ManagedElement	ManagedElement
information object class, ManagedFunction	ManagedFunction
information object class, SubNetwork	SubNetwork
information object class, Top	Top
information object class, BS	BS
Information object class, BSFunction	BSFunction
information object class, ExternalBSFunction	ExternalBSFunction
information object class, BSRelation	BSRelation
Information object class, PagingGroup	PagingGroup

14.3.1.2 Class diagram

14.3.1.2.1 Attributes and relationships

~~Figure 1 establishes~~ The naming and containment for the protocol neutral network management models of the 802.16 standard are shown in the following figures. They are split in several figures only for a readability purpose.

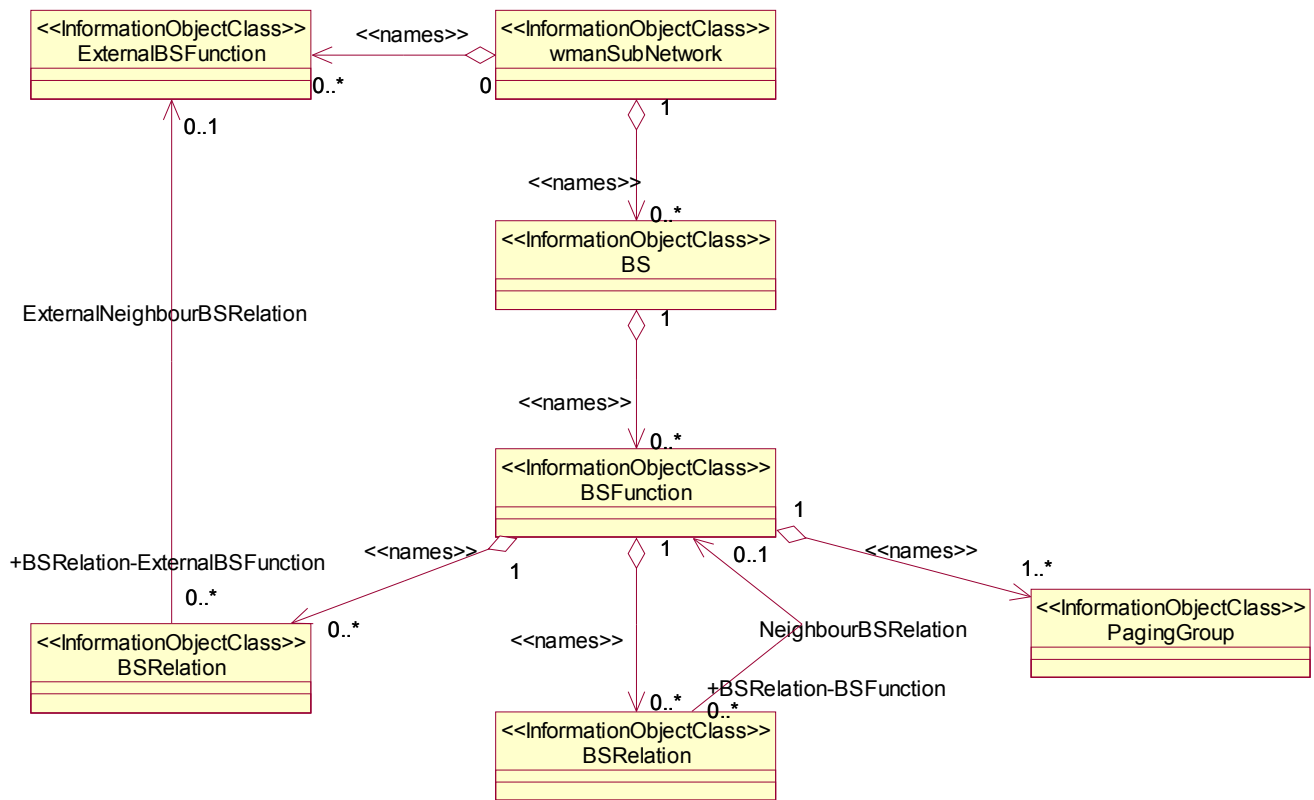


Figure X Segment view BS NRM Containment/Naming Diagram

The inheritance diagram show in Figure 2. is based on 802.16e and 802.16-2004. This diagram establishes the context of the IOC and shows ME's as inventory items and MF's as the functions that perform functions in the 802.16 network.

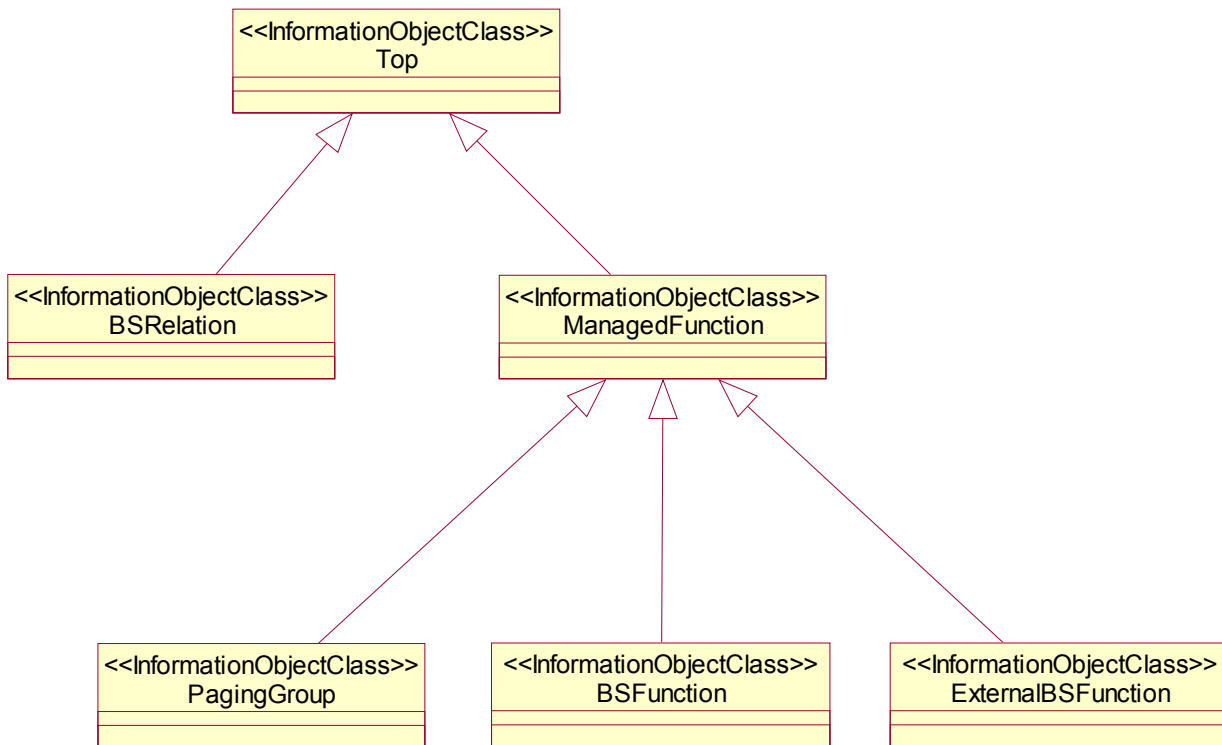


Figure X Inheritance Diagram

14.3.1.3 Information object classes definition

14.3.1.3.X IOC BSFunction

14.3.1.3.X.1 Definition

This IOC represents a WMAN base station. It is derived from ManagedFunction.

14.3.1.3.X.2 Attributes

Attributes of BSFunction

Attribute name	Visibility	Support Qualifier	Read Qualifier	Write Qualifier
OperatorID	+	M	M	M
BSID	+	M	M	M
HandoverSupportedType	+	M	M	M
SystemResourceRetainTime	+	M	M	M
HOOptimizationMSTimer	+	M	M	M
MSHOREtransmissionTimer	+	M	M	M
MobilitySupportedIndication	+	M	M	M
MSHOCOnnectionProcessTime	+	M	M	M
MSHOTeKProcessTime	+	M	M	M
ULPermutationBase	+	M	M	M
DLPermutationBase	+	M	M	M
PreambleIndex	+	M	M	M
SegmentNumber	+	M	M	M

14.3.1.3.X IOC ExternalBSFunction

14.3.1.3.X.1 Definition

This IOC represents a WMAN base station which belongs to the other subnetwork. It is derived from ManagedFunction.

14.3.1.3.X.2 Attributes

Attributes of ExternalBSFunction

Attribute name	Visibility	Support Qualifier	Read Qualifier	Write Qualifier
ExternalBSId	+	M	M	-
FAIndex	+	M	M	M
BSEIRP	+	M	M	M
SchedulingServiceSupported	+	M	M	M
HOPProcessOptimization	+	M	M	M
Bandwidth	+	M	M	M
FFTSize	+	M	M	M
CyclePrefix	+	M	M	M
FramDurationCode	+	M	M	M
ULPermutationBase	+	M	M	M
DLPermutationBase	+	M	M	M
SegmentNumber	+	M	M	M
PreambleIndex	+	M	M	M

14.3.1.3.X IOC BSRelation

14.3.1.3.X.1 Definition

This IOC represents the relation between two neighbor WMAN base stations. It is derived from ManagedFunction.

14.3.1.3.X.2 Attributes

Attributes of BSRelation

Attribute name	Visibility	Support Qualifier	Read Qualifier	Write Qualifier
BSRelationId	+	M	M	-
adjacentBS	+	M	M	M
FAIndex	+	M	M	M
BSEIRP	+	M	M	M
SchedulingServiceSupported	+	M	M	M
HOPProcessOptimization	+	M	M	M
Bandwidth	+	M	M	M
FFTSize	+	M	M	M
CyclePrefix	+	M	M	M
FramDurationCode	+	M	M	M
ULPermutationBase	+	M	M	M
DLPermutationBase	+	M	M	M
SegmentNumber	+	M	M	M
PreambleIndex	+	M	M	M

14.3.1.4 Information relationships definition

14.3.1.4.1 ExternalNeighbourBSRelation

14.3.1.4.1.1 Definition

This represents a unidirectional relation from BSRelation to the ExternalBSFunction. The role of the relation shall be mapped to a reference attribute, named adjacentBS, of the IOC.

14.3.1.4.1.2 Roles

Roles of the relation ExternalNeighbourBSRelation

Name	Definition
BSRelation – ExternalBSFunction	This role (when present) represents BSRelation capability to identify one ExternalBSFunction. When this role is present, the BSRelation.adjacentBS shall contain one ExternalBS DN.

14.3.1.4.1.3 Constraints

This role (for a particular BSRelation) shall be present if the NeighbourBSRelation of this particular BSRelation is absent. This role shall be absent if the NeighbourBSRelation of this particular BSRelation is present.

14.3.1.4.2 NeighbourBSRelation

14.3.1.4.2.1 Definition

This represents the unidirectional relation from the BSRelation to BSFunction. The role of the relation shall be mapped to a reference attribute, named adjacentBS, of the IOC.

14.3.1.4.2.2 Roles

Roles of the relation NeighbourBSRelation

Name	Definition
BSRelation – BSFunction	This role (when present) represents BSRelation capability to identify one BSFunction. When this role is present, the BSRelation.adjacentBS shall contain one BS DN.

14.3.1.4.2.3 Constraints

This role (for a particular BSRelation) shall be present if the ExternalNeighbourBSRelation of this particular BSRelation is absent. This role shall be absent if the ExternalNeighbourBSRelation of this particular BSRelation is present.

14.3.1.5 Notifications

14.3.1.6 Information attributes definition

14.3.1.6.1 Definition and legal values

The following table defines the attributes that are present in several Information Object Classes (IOCs) of the present document.

Attribute Name	Definition	Legal Values
OperatorID	Operator Identifier	
BSID	BS Identifier	
HandoverSupportedType	The Handover supported field indicates what type(s) of HO the BS and the MS support.	Type: Enumerated value Range: (MDHO/FBSS HO not supported(0), FBSS/MDHO DLRf combining supported (1), MDHO DL soft combining supported monitoring single MAP from anchor BS (2), MDHO DL soft combining supported monitoring MAPS from active BSs(3))
SystemResourceRetainTime	The Resource_Retain_Time is the duration for MS s connection information that will be retained in serving BS. BS shall start Resource_Retain_Time timer at MS notification of pending HO attempt through MOB_HO-IND or by detecting an MS drop. The unit of this value is 100 milliseconds.	

HOOptimizationMSTimer	the duration in frames MS shall wait until receipt of the next unsolicited network re-entry MAC management message as indicated in the HO Process Optimization element of the RNG-RSP message.	
MSHORetransmissionTimer	After a MS transmits MOB_MSHO-REQ to initiate a handover process, it shall start MS Handover Retransmission Timer and shall not transmit another MOB_MSHO-REQ until the expiration of the MS Handover Retransmission Timer.	
MobilitySupportedIndication	The Mobility features supported field indicates whether or not the MS supports mobility modes.	Type: Enumerated value Range :(Handover Support(0), Sleep-mode Support(1), Idle-mode Support(2))
MSHOConnectionProcessTime	Time in ms the MS needs to process information on connections provided in RNGRSP or REG-RSP message during HO	
MSHOTeKProcessTime	Time in ms the MS needs to completely process TEK information during HO	
ULPermutationBase	Uplink subcarrier allocation	
DLPermutationBase	Downlink subcarrier allocation	
PreambleIndex	Downlink synchronization by MS	
SegmentNumber	An unique segment identifier	
ExternalBSId	External BS Identifier	
FAIndex	Frequency Assignment Index	
BSEIRP	Neighbour BS EIRP	
HOProcessOptimization	Identifies re-entry process management messages that may be omitted during the current HO attempt due to the availability of MS service and operational context information, and the MS service and operational status post-HO completion.	
SchedulingServiceSupported	Indicate neighbouring BS scheduling service type.	Type: Enumerated value Range: (Non-real-time Polling Service(0), Real-time Polling Service(0), Extended real-time Polling Service(0), Unsolicited Grant Service(0), Best Effort(3))
Bandwidth	Indicate neighbouring BS bandwidth.	
FFTSize	Indicate neighbouring BS FFT size	
CyclePrefix	indicate neighbouring BS Cycle Prefix	
FramDurationCode	Indicate neighbouring BS Frame duration code	
ULPermutationBase	Indicate neighbouring BS uplink permutation base.	
DLPermutationBase	Indicate neighbouring BS uplink permutation base.	
SegmentNumber	Indicate neighbouring BS segment number.	
PreambleIndex	Indicate neighbouring BS preamble index.	
BSRelationId		
adjacentBS	It carries the DN of the BS or the ExternalBS.	