

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Primitives Supporting Association Procedures	
Date Submitted	2007-01-18	
Source(s)	Ronald Mao	Voice: 858-882-0335 Fax: 858-882-0350 rmao@huawei.com
Re:	P80216g_D6	
Abstract	This contribution proposes C_SAP primitives to be adopted in IEEE 802.16g to support association procedures specified in IEEE 802.16e-2005.	
Purpose	Adopt the contribution.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Primitives Supporting Association Procedures

Ronald Mao

Huawei Technologies

Abstract

This contribution proposes C_SAP primitives to be adopted in IEEE 802.16g to support association procedures specified in IEEE 802.16e-2005.

Background

What is association?

Association is an initial ranging procedure occurring during scanning interval with respect to one of the neighboring BSs. The function of association is to enable the MS to acquire and record ranging parameters and service availability information for the purpose of proper selection of HO target and/or expediting a potential future handover to a target BS. Recorded ranging parameters of an associated BS may be further used for setting initial ranging values in future ranging events during actual handover.

Why is there a need for association primitives?

In order to perform association ranging effectively, the MS must know the ranging assignment from the neighboring BSs to avoid ranging collision. After ranging request, the resulting ranging parameters from the neighboring BSs can be delivered to the MS via the serving BS over the network backbone to save air interface bandwidth. Those objectives can be achieved by different levels of association.

Three levels of association are specified in 16e. Level 0 association is scanning between the MS and the neighboring BS without the coordination of the serving BS. The association is contention based and not very efficient. Level 1 association between the MS and the neighboring BS requires the coordination of the serving BS in which the neighboring BSs provide ranging information for association at a predefined rendezvous time and the serving BS also assures that the neighboring BSs do not have overlapping assignments of ranging regions. Level 2 association is the same as Level 1, except that the MS does not receive ranging parameters (RNG-RSP) from the neighboring BSs. Instead, the neighboring BSs will send ranging parameters to the serving BS over the backbone and the serving BS may aggregate all ranging information into a single message (MOB_ASC-REP). The association requires the Mobility Management services on the management layer. Hence the primitives between the BS 802.16 entity and the NCMS are required on the C_SAP.

The negotiation of the scanning type or association level is made by C-HO-REQ/REQ (HO-Scan). This is applicable to Association Level 0, 1, and 2.

The coordinated association assignments are delivered in C-HO-RSP (HO-Scan). This is applicable to Association Level 1 and 2. For Level 0, assignments are not coordinated and ranging is contention based. The coordination between the serving BS and the neighboring BSs are out of the scope.

The association parameters are delivered in by C-HO-IND (HO-Scan). This is only applicable to Association Level 2. For Level 0 or 1, the parameters are delivered in RNG-RSP. The delivery of the parameters from the neighboring BSs to the serving BS is out of scope.

Why now?

The support of association procedures is optional and is not in the current system profile. However, 16g project is closing very soon and if we wait for the feature to be in the system profile, it would be too late to update 16g. Therefore we have to act now.

Proposal

[Insert this diagram after Figure 493 on Page 78]

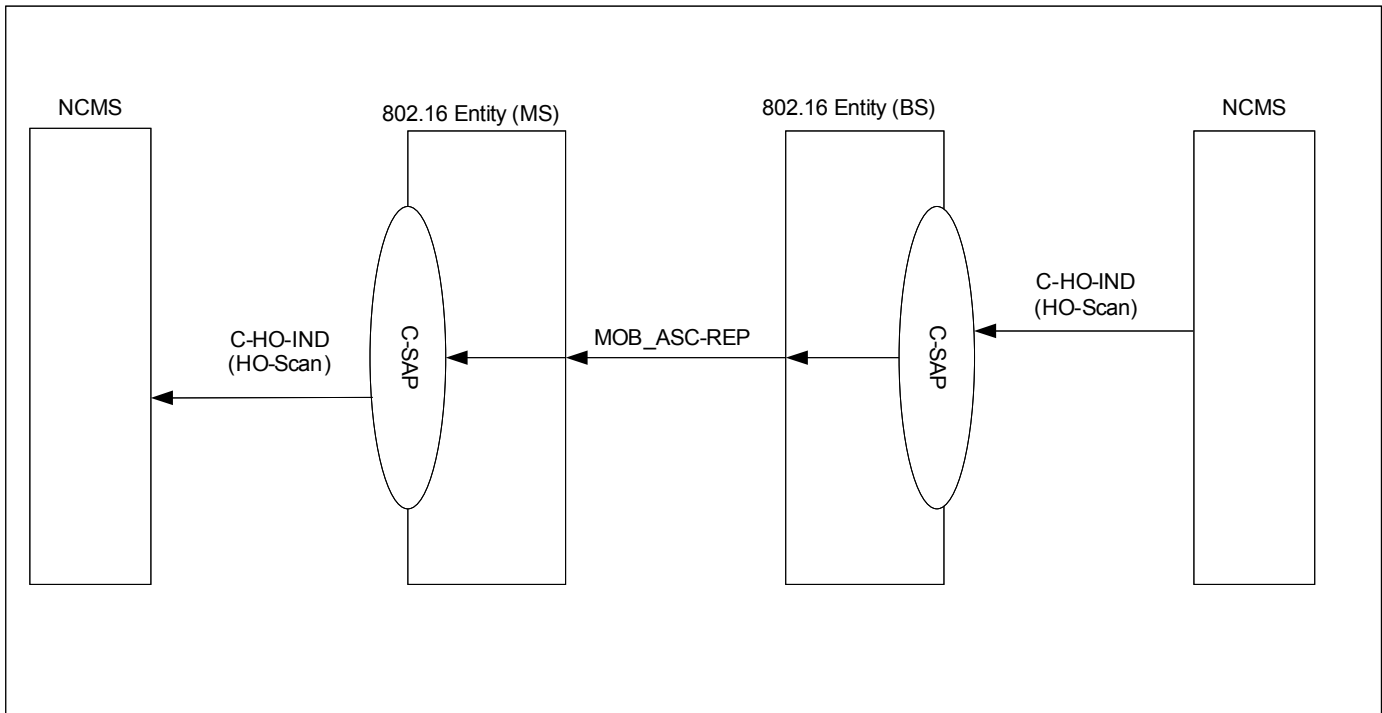


Figure 0-1 Primitives for association ranging report

[Update the 16g text as follows starting from Page78]

14.2.5.2.1.3 C-HO-REQ(Action_Type==HO-Scan)

Function:

This primitive is issued by the Mobility Management Services entity in NCMS(BS) to request radio signal information of MSs. This primitive is also used by the Mobility Management Services entity in NCMS(SS/MS) to instruct the MS to request scanning interval, to start to scan or to report the scanning result to the NCMS(SS/MS) or to the Serving BS.

Semantics of the service primitive:

The parameters of the primitive are as follow:

C-HO-REQ

```
(
  Operation_Type(Action),
  Action_Type(HO-Scan),
  Destination(BS or MS),
  Attribute_list:
    Number of MS,
    List of MS MAC Address,
    Scan Duration,

    Link Quality Threshold,
    Link Status Report Period,
    Report Target,
    List of Neighboring BS,
    List of Scanning Type,
)
```

Number of MS

Number of MSs

List of MS MAC Address

The list of MS MAC Address

Scan Duration

Scan duration time

Signal Quality Threshold

Signal Quality threshold. Scanning report shall be made when link quality goes worse than this threshold.

Link Status Report Period

Time period that the scanning report shall be made.

Report Target

This indicates the object to which report shall be made.

List of Neighboring BS

The list of neighboring BS to which the MS would like to perform association.

List of Scanning Type

List of scanning type, 0b001, 0b010, or 0b011 corresponds to association type Level 0, 1, or 2, respectively.

One scanning type for each neighboring BS.

14.2.5.2.2.3 C-HO-RSP(Action_Type==HO-Scan)

Function:

This primitive is issued by an 802.16 entity to respond to C-HO-REQ(HO-Scan)

Semantics of the service primitive:

The parameters of the primitive are as follows:

C-HO-RSP

```
(
  Operation_Type(Action),
  Action_Type(HO-Scan),
  Destination(NCMS),
  Attribute_list:
    Number of MS,
    List of MS MAC Address,
    List of Signal information,
    Scan Duration,
    Start Frame,
    MIH Capability,
    List of Neighboring BS.
    List of Scanning Type.
    List of Association Ranging Assignment.
    Result Code
)
```

Number of MS

Number of MSs

List of MS MAC Address

The list of MS MAC Address

List of Signal Information

Downlink Physical Service Level,
Downlink RSSI mean,
Downlink RSSI standard deviation,
Downlink CINR mean,
Downlink CINR standard deviation,

Scan Duration

Scan duration time

Start Frame

Scan start frame

MIH Capability

MIH capability of the current BS. This parameter carries the MIH capability field in the DCD message, if available.

[List of Neighboring BS](#)

[The list of neighboring BS to which the MS may perform association](#)

[List of Scanning Type](#)

[Scanning type; 0b001, 0b010, or 0b011 corresponds to association type Level 0, 1, or 2, respectively.](#)

[List of Association Ranging Assignment](#)

[Rendezvous Time,](#)
[Dedication Codes,](#)
[Transmission Opportunity Offset](#)

Result Code

The result of scan report message transmission. When there is no available BS to scan, 'No Available BS' result code shall be included.

...

14.2.5.2.3.3 C-HO-IND (Event_Type==HO-Scan)

Function:

On the uplink, this primitive is used to indicate the reception of MOB_SCAN-REP message from the MS. The 802.16 BS entity uses this primitive to report MS radio information to the NCMS.

On the downlink, this primitive is used by the NCMS to forward the ranging parameters to the 802.16 entity (BS) in order to trigger the MOB_SCAN-REP message, and by the 802.16 entity (MS) to forward the ranging parameters to the NCMS.

Semantics of the service primitive:

The following parameters are included in this primitive.

```

C-HO-IND
(
  Event_Type(HO-Scan),
  Destination(NCMS, MS),
  Attribute_list:
    MS MAC Address
    RF Signal information
    List of Neighboring BS.
    List of Association Ranging Parameters.
)

```

MS MAC Address

48-bit unique identifier used by MS

RF Signal Information

TBD.

List of Neighboring BS

The list of neighboring BS reporting association ranging parameters.

List of Association Ranging Parameters

PHY offset (Timing adjust, power level adjust, SLP, etc.)

When generated:**802.16 BS entity to NCMS:**

This primitive is generated by 802.16 BS entity when it receives a MOB_SCAN-REP.

NCMS to 802.16 BS entity:

This primitive may be generated by the NCMS of the 802.16 entity (serving BS) after it has collected and aggregated association ranging parameters from the neighboring BSs.

802.16 MS entity to NCMS:

This primitive is generated by the 802.16 entity (MS) to forward the ranging parameters to the NCMS.

Effect of receipt:

802.16 BS entity to NCMS:

NCMS processes the information and may decide to trigger a BS-initiated handover.

NCMS to 802.16 BS entity:

This primitive will trigger the 802.16 entity (BS) to trigger the MOB_ASC-REP message.

802.16 MS entity to NCMS:

The NCMS (MS) will store the ranging parameters as association records.