

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Relay-Assisted MS Network Entry	
Date Submitted	2006-11-07	
Source(s)	Aik Chindapol Yishen Sun Jimmy Chui Yisheng Xue Siemens	Voice: +1 609 734 3364 Fax: +1 609 734 6565 Email: aik.chindapol@siemens.com
Re:	This document is in response to call for technical proposals IEEE 80216-06/027 dated 15 October 2006.	
Abstract	This document describes relay-assisted MS network entry procedures.	
Purpose	This contribution is provided as input for the IEEE 802.16j baseline document.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Relay-Assisted MS Network Entry


Aik Chindapol, Yishen Sun, Jimmy Chui, Yisheng Xue
Siemens

1 Introduction

Relay-enhanced 802.16 systems will allow legacy MSs to initiate network entry with the RS or BS. This scenario does not exist in the legacy standard, and hence requires modification of the MS network entry procedure. However, MS operation for the network entry procedure cannot change from the legacy standard [1] [2], according to the backward compatibility requirement [3].

This contribution proposes a method for the MS network entry procedure for 802.16 with MMR.

2 Assumptions

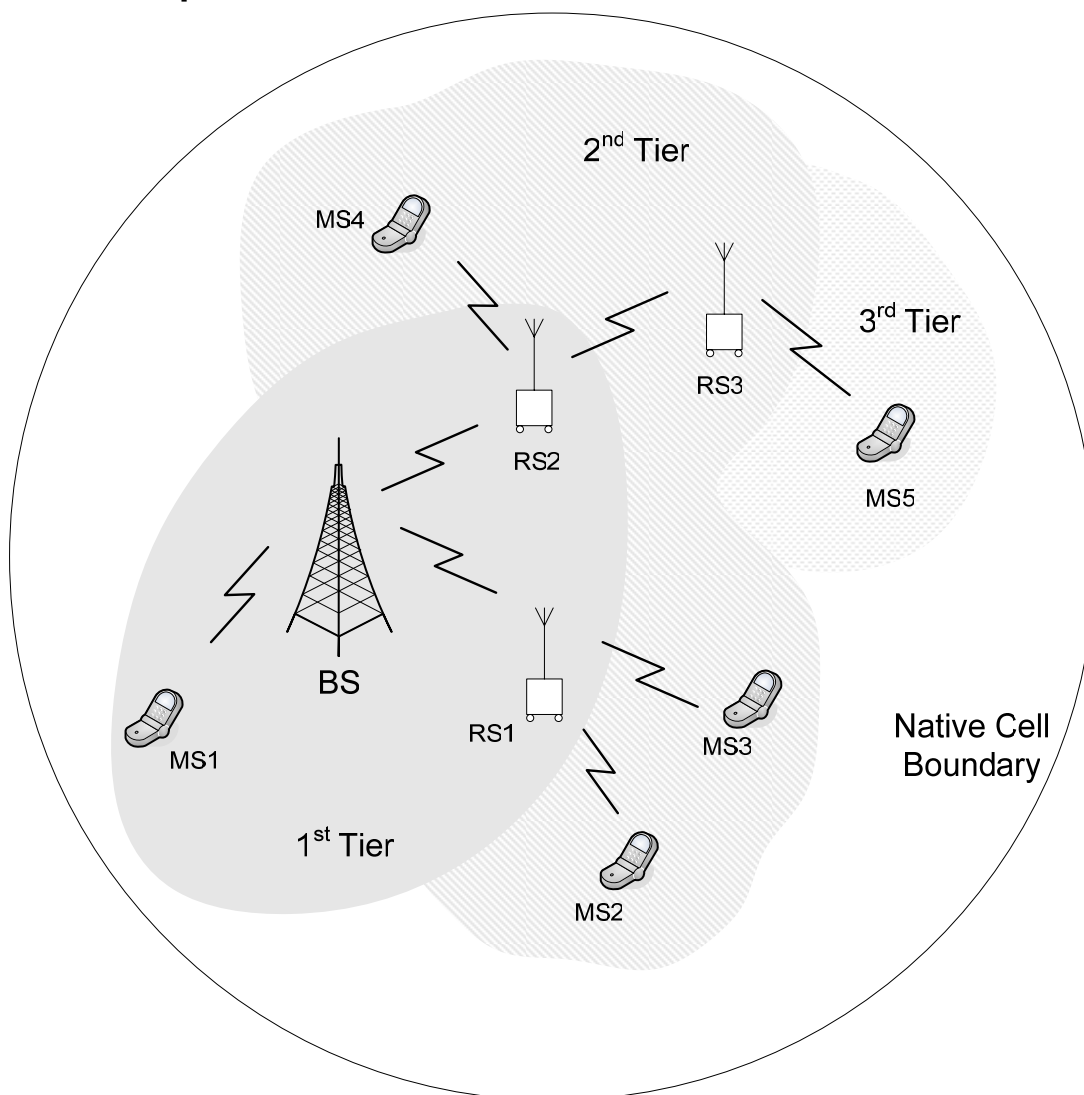


In this setup, we consider a relay setup where all relay stations (RS) and mobile stations (MS) receive control information such as preamble, FCH and MAP directly from the base station (BS). The RS may assist the BS in

1 transmitting data; however, the MS is not aware of this operation. In other words, the MS is not aware of the
2 presence of relays and continues to receive or transmit packets as if they are from the BS.

4 **3 MS Network Entry**


5 Given the assumption, a MS can communicate with the BS directly. Hence, it is not necessary for the RS to
6 intervene during MS network entry, and a MS can associate itself directly to the BS in the manner specified by
7 the legacy standard. Before the initialization procedure is complete, the BS will perform intra-cell routing in
8 order to determine the best routing path before assigning data connections. This exact routing algorithm and
9 distribution of route information is beyond the scope of this document.

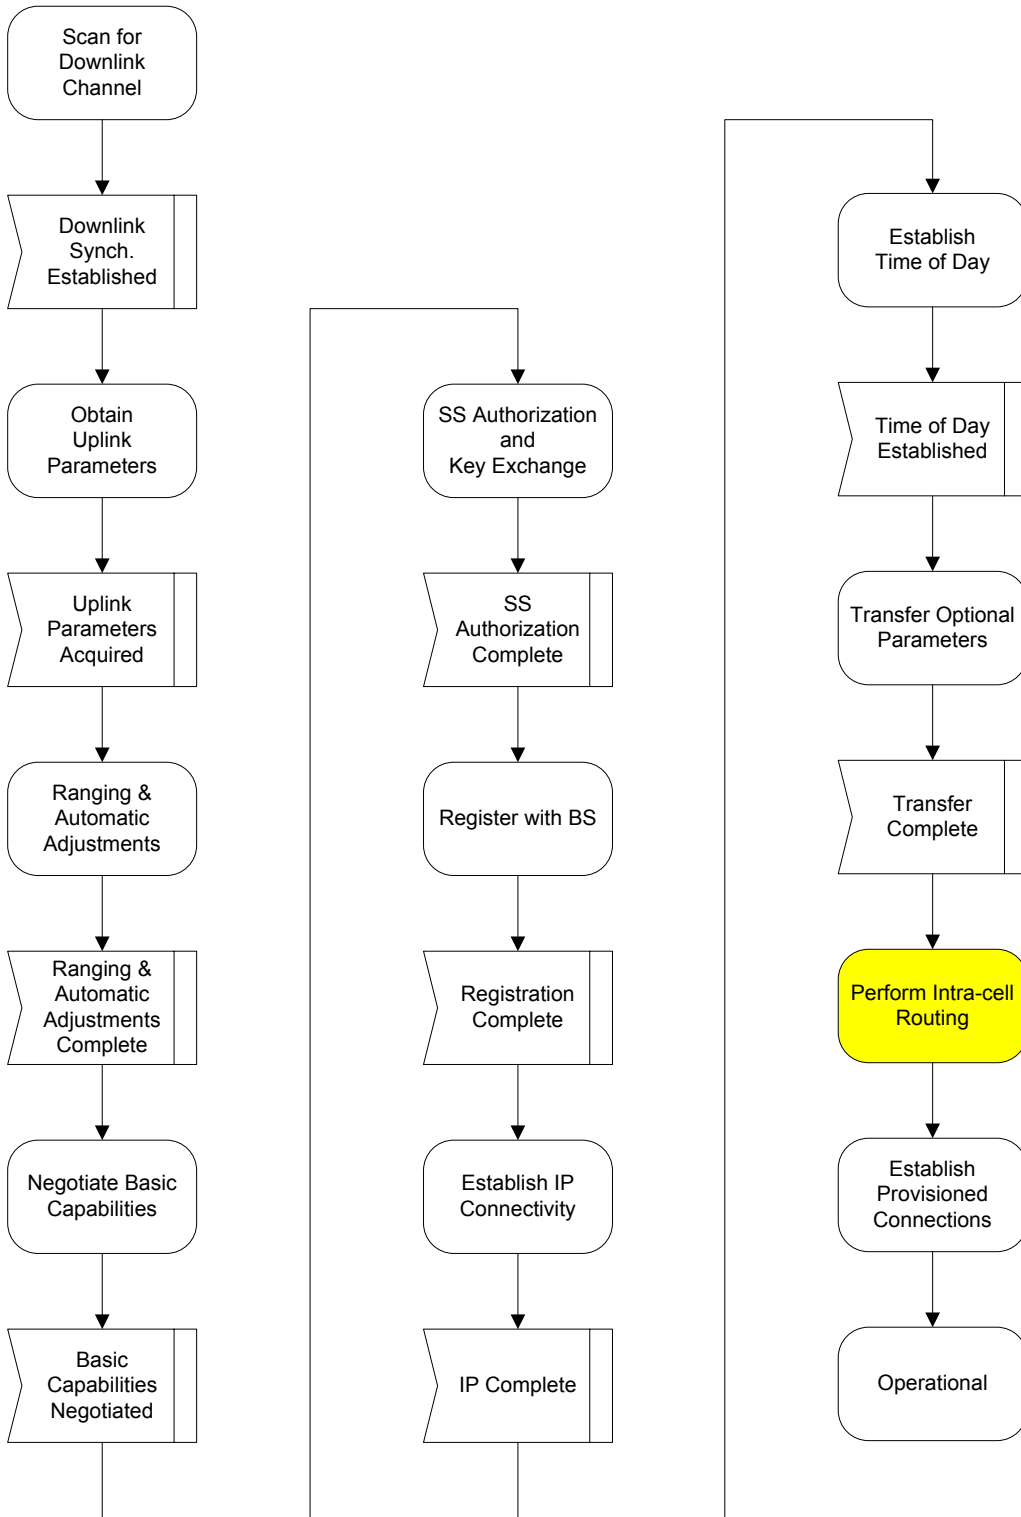

1
2
3
4
5
6
7

As mentioned before, we consider the case where the RS is deployed in a BS-controlled system. Each MS starts initial ranging by sending a CDMA code on the initial ranging channel defined by the BS. The BS resorts to the characteristic of CDMA codes to perform contention resolution. After successfully resolving an initial ranging request from a SS/MS, the BS allocates an uplink bandwidth allocation for further network entry procedure. However, when the MS tries to enter the network at a disadvantageous location, e.g., being located in a coverage hole, its request can hardly be heard by the BS.

1 In this proposal each RS is allowed to perform contention resolution on what it receives on the initial ranging
 2 channel to the same way as the BS does. Then, the RS listens for the response from the BS. It remains silent if
 3 the request from the MS has been successfully processed. Otherwise, it relays the missing information to the
 4 BS.

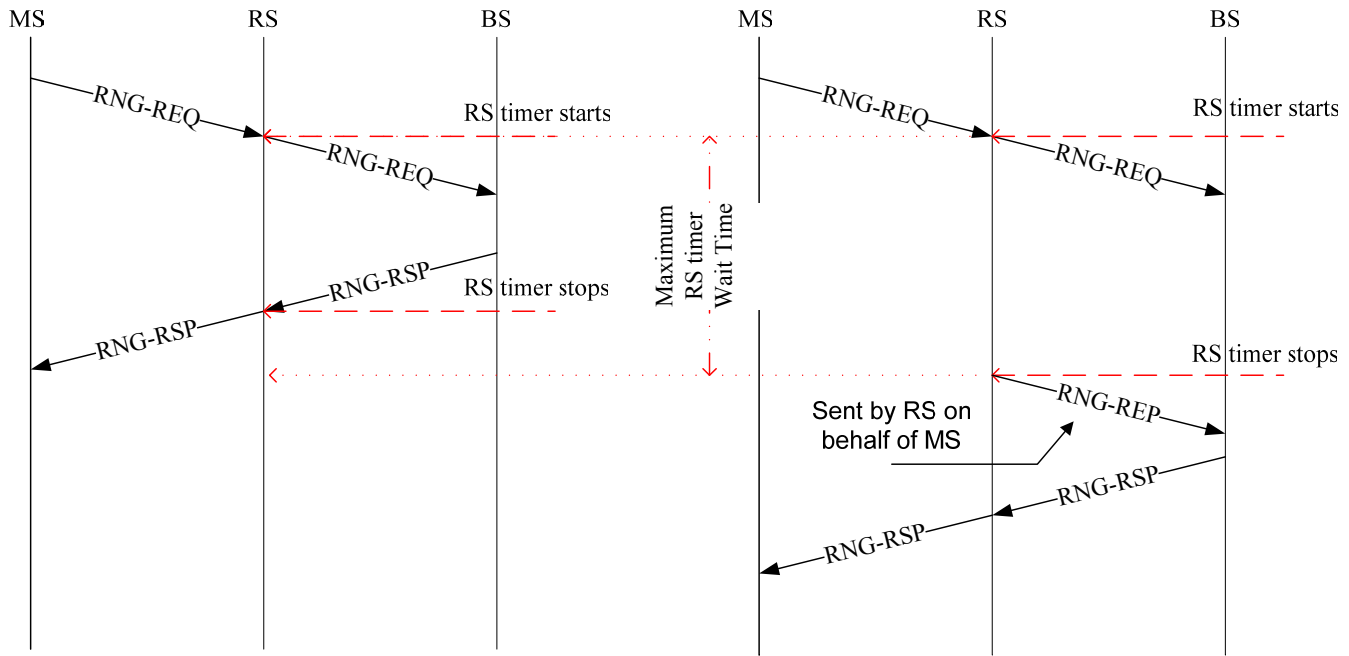

5 a) Timer stopped by a BS response message

6 b) RS is triggered to relay RNG-REQ by timer overflows

7 Figure 1 depicts the possible time charts between BS, SS and RS. Figure 1a) illustrates the case when the timer
 8 is stopped since the BS sends the RNG-RSP; Figure 1b) illustrates the case when the RS is triggered to relay the
 9 RNG-REQ by timer overflows.

9 **4 Proposed Text**

10 6.3.2.3 MAC management messages

11 *Change table 14 as indicated:*

12 Table 14—MAC Management messages

Type	Message name	Message description	Connection
8	—RNG-REP	Reserved Ranging Repeat	—Initial Ranging

13
 14
 15 *Insert new subclause 6.3.2.3.62:*

16 6.3.2.3.62 Ranging repeat (RNG-REP) message

17 An RNG-REP shall be transmitted by the RS after the timer T_{xy} expires (according to xxx.yyy.zzz) to assist
 18 the transmission of RNG_REQ from the MS. The format of the RNG-REP message is shown in Table 109z.

1 Table 109z—RNG-MSR message format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>RNG-MSR Message Format() {</u>		
<u>Management Message Type=8</u>	<u>8 bits</u>	
<u>Frame Number</u>	<u>24 bits</u>	
<u>CDMA Code Index</u>	<u>8 bits</u>	
<u>Timing Adjust</u>	<u>32 bits</u>	
<u>Offset Frequency Adjust</u>	<u>32 bits</u>	
<u>Power Level Adjust</u>	<u>8 bits</u>	
<u>}</u>		

2

3 5 References

- 4 [1] IEEE 802.16-2004, “Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems”.
- 5 [2] IEEE 802.16e-2005, “Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems,
6 Amendment 2: Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in
7 Licensed Bands *and* Corrigendum 1”.
- 8 [3] IEEE C802.16j-06/050r4, “Proposed Technical Requirements for IEEE 802.16 TGj”.
- 9