

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>RS Neighborhood Discovery and Measurement for IEEE 802.16j Multi-hop Relay Network</b>	
Date Submitted	<b>2007/1/18</b>	
Source(s)	<p>I-Kang Fu, Wern-Ho Sheen, Fang-Ching Ren, Tzu-Ming Lin, Chie-Ming Chou, Jen-Shun Yang NCTU / ITRI ED922, 1001 Ta Hsueh Rd., Hsinchu City, Taiwan 300, ROC</p> <p>Yong Sun, Dharma Basgeet, Fang Zhong, Paul Strauch Toshiba Research Europe Limited 32 Queen Square, Bristol BS1 4ND, UK</p> <p>Peter Wang Nokia 6000 Connection Drive, Irving, TX</p> <p>Wei-Peng Chen , Chenxi Zhu Fujitsu Laboratories of America</p> <p>Dorin Viorel Fujitsu Microelectronics Canada Inc.</p> <p>Jun Bae Ahn SOLiD Technologies 10<sup>th</sup> Fl., IT Venture Tower East Wing, 78 Garak-Dong, Songpa-Gu, Seoul, Korea.</p> <p>Youngbin Chang Samsung Electronics 416, Metan-dong, Yeongtong-gu, Suwon, Korea</p> <p>Sungcheol Chang ETRI 161 Gajeong-dong, Yuseong-gu, Daejeon, 305-700, Korea</p> <p>Koon Teo Mitsubishi Electric Research Laboratories 201 Broadway, Cambridge, MA 02139</p> <p>Aik Chindapol, Jimmy Chui Siemens Corporation Research 755 College Road East, Princeton, NJ, 08540</p> <p>Sean Cai ZTE USA Inc. 10105 Pacific Heights Blvd. Suite 250 San Diego, CA 92121</p> <p>Kanchei (Ken) Loa, Yi-Hsueh Tsai, Shiann-Tsong Sheu, Hua-Chiang Yin, Chih-Chiang, Hsieh, Yung-Ting Lee, Frank C.D. Tsai, Heng-Iang Hsu, Youn-Tai Lee Institute for Information Industry 8F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan.</p>	<p><a href="mailto:IKFu@itri.org.tw">IKFu@itri.org.tw</a></p> <p><a href="mailto:Sun@toshiba-trel.com">Sun@toshiba-trel.com</a></p> <p><a href="mailto:peter.wang@nokia.com">peter.wang@nokia.com</a></p> <p><a href="mailto:wei-peng.chen@us.fujitsu.com">wei-peng.chen@us.fujitsu.com</a> <a href="mailto:chenxi.zhu@us.fujitsu.com">chenxi.zhu@us.fujitsu.com</a></p> <p><a href="mailto:dviorel@fmci.fujitsu.com">dviorel@fmci.fujitsu.com</a></p> <p><a href="mailto:jbahn@st.co.kr">jbahn@st.co.kr</a></p> <p><a href="mailto:yb.chang@samsung.com">yb.chang@samsung.com</a></p> <p><a href="mailto:scchang@etri.re.kr">scchang@etri.re.kr</a></p> <p><a href="mailto:teo@merl.com">teo@merl.com</a></p> <p><a href="mailto:aik.chindapol@siemens.com">aik.chindapol@siemens.com</a></p> <p><a href="mailto:scai@zteusa.com">scai@zteusa.com</a></p> <p><a href="mailto:loa@iii.org.tw">loa@iii.org.tw</a></p>

Re:	IEEE 802.16j-06/034: "Call for Technical Proposals regarding IEEE Project P802.16j"
Abstract	This contribution introduces a RS neighborhood discovery and measurement mechanism, and then proposes the required message and text input for IEEE 802.16j baseline document.
Purpose	Propose a RS neighborhood discovery and measurement mechanism and the required message and text input for IEEE 802.16j Multi-hop Relay network.
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.

## RS Neighborhood Discovery and Measurement for IEEE 802.16j Multi-hop Relay Network

This contribution presents a RS neighborhood measurement mechanism for neighborhood discovery and measurement in IEEE 802.16j Multi-hop Relay network. The fundamental concept of the proposed measurement mechanism will be first introduced, and then an example is provided to show that how MR network can utilize measurement results to predict the received interference or SINR level before reusing [1] or grouping [2] the radio resources (e.g. segment) and configure/reconfigure the MR network topology.

In the proposed mechanism, MR-BS or other coordinator in backhaul network can request a set of the RSs to transmit the reference signals, which has the same format as 16e preamble, over the designated OFDMA symbol offset for the measurement by other stations. After the RSs reporting the measurement results to the MR-BS or the coordinator in backhaul network, it has the full knowledge on how the RSs may interfere with each other. Then various algorithms for segment assignment/reuse, neighborhood discovery, neighbor list establishment and topology configuration can be benefited by this information.


The fundamental concept of RS scanning is almost the same as 16e MS scanning, and the difference is that RS scanning is performed in unit of OFDMA symbol instead in unit of frame duration. It is because all the data transmission of the subordinated stations may be terminated when RS is scanning its neighborhood; therefore, reducing the scanning duration is very critical with respect to MS scanning.

Meanwhile, other contributions [3-5] had also presented how the resource reuse in access links can be operated by utilizing the measurement results obtained by this mechanism.

### I. The necessities of RS neighborhood discovery and measurement

1  
2 When a RS being deployed into the MR network, it shall scan its neighbor stations and then perform the  
3 network entry with one of the neighbor stations. The neighbor discovery and measurement can be performed in  
4 advance of network entry in this case, and RS can directly report its measurement results to MR-BS after  
5 network entry. However, not every RS in MR network will transmit its preamble (e.g. transparent RS) or  
6 transmit its own preamble (e.g. when RSs are grouped [2]), therefore, the RS may still need to scan its  
7 neighborhood again after network entry. In addition, this kind of measurement may also be required for  
8 adjusting the transmit power of RS [4], or be required after RS power adjust so as to explore the resource reuse  
9 possibility. The aforementioned reasons are applicable for fixed, nomadic or mobile RS. The following gives an  
10 example to explain the necessity of such automatic neighborhood discovery and measurement mechanism. In the  
11 multi-hop relay systems, the coverage extension and user throughput enhancement may be achieved at the  
12 expense of system capacity [6,7]. It is because the user data in relay links carries the same information as the  
13 data in access links, therefore, all the traffic in relay links can be treated as a kind of overhead. If the capacity  
14 improvement leaded by better signal quality and higher transmission rate cannot compensate the capacity loss  
15 due to radio resources consumed by relay links, the overall system capacity will be degraded due to the  
16 deployment of the RSs into the network.

17 In order to increase the system capacity, reusing the radio resources (i.e. sub-channel and symbol time, or  
18 segment) in different relay and/or access links has been shown as an efficient solution. Compared with the case  
19 without reusing radio resources, the simulation results in Figure 1 shows that the system capacity can be  
20 substantially increased [6,7]. Moreover, its capacity is also significantly outperformed with respect to the case  
21 without relaying.

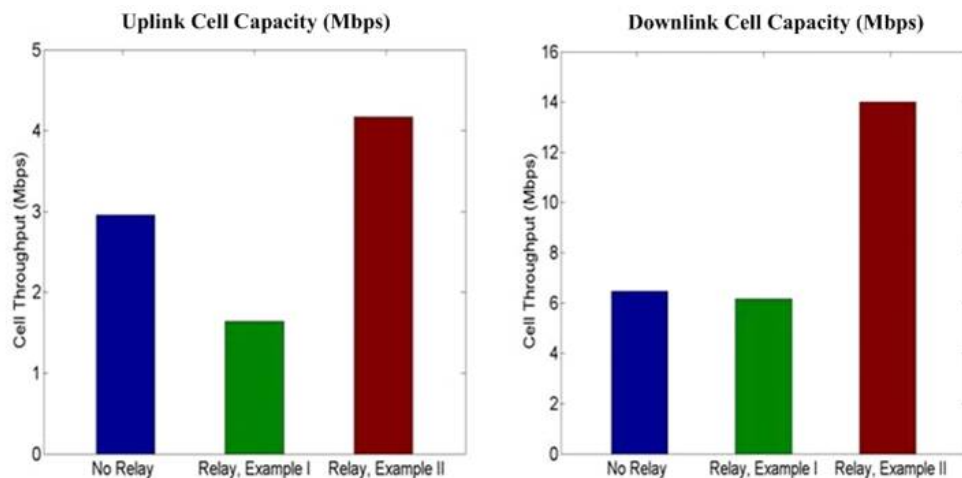

23  
24 Fig.1 Capacity comparison for different relay scenarios

25  
26 However, considering an arbitrary MR network as shown in Figure 2, a fundamental problem is: “**Which**  
27 **links can reuse the same radio resources without disturbing each other?**”.

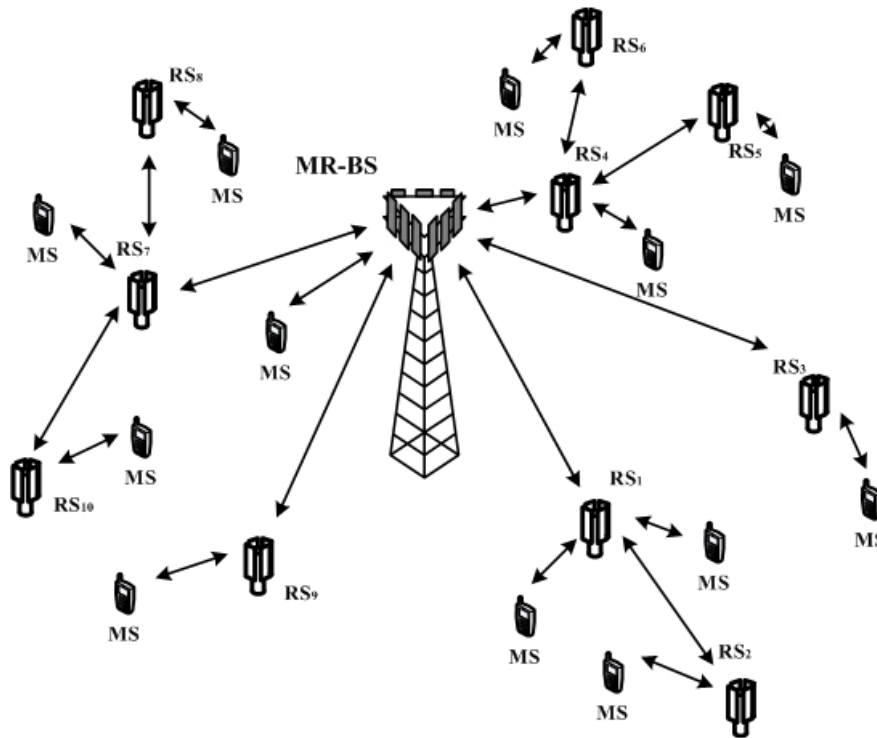


Fig.2 An example of IEEE 802.16j MR network

A traditional method is performing the cell planning when deploying each RS. Therefore, the transmit power, resource assignment and reuse scenario can be manually configured based on the geographical location and the field trial measurement results. However, the geographic location may not be able to reflect the real propagation environment, and the interference measurement can provide better prediction for MR network to explore the propagation environments.

An alternative method is to configure the MR network in automatic manner, which means that the RSs can detect and measure the radio signal transmitted from each other, and then report the detection and measurement results to MR-BS (or any other controller) to configure the MR network automatically. Therefore, the MR network can be easily managed in response to time variant traffic distribution or other load unbalance situations. For example, the MR-BS may instruct the permutation scheme of RS<sub>3</sub> to be changed from PUSC to FUSC (or assign more segments), so as to increase the capacity over the specific area.

In order to make MR network able to automatic configure/reconfigure its reuse scenario, an interference measurement and neighbor detection mechanism will be necessary to provide the required information to MR-BS.


Moreover, the results of interference measurement and neighborhood detection can also be applied to compose the neighbor list for each station, and the example presented in this contribution also shows that it can also be utilized to determine the topology for MR network.

## II. The concept of the neighborhood discovery and measurement mechanism

The fundamental concept of the interference measurement mechanism can be illustrated by Figure 3, which includes a MR cell composed by one MR-BS and several RSs. The MR-BS network can designate one or more time-frequency regions for specific stations to transmit the reference signals (e.g. same format as 16e preamble),

1 and other stations can perform the measurement over the same time-frequency region.

2 As a specific example as shown in Figure 3, RS<sub>10</sub>, RS<sub>8</sub>, RS<sub>2</sub> and RS<sub>5</sub> are requested to transmit the reference  
3 signals by MR-BS, and the rest of other stations will perform the measurement of the those reference signals.

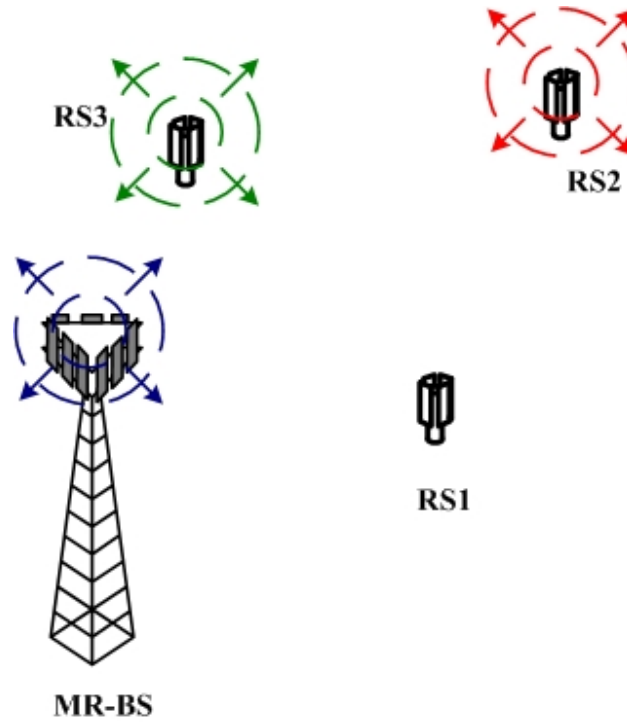

4


5 Fig.3 An example of the neighborhood discovery and measurement in MR network

6

7

8 Since the reference signal to be scanned has the same format as 16e preamble, therefore, one possible way to  
9 arrange the scanning opportunity is designating multiple stations (i.e. RS<sub>2</sub>, RS<sub>3</sub> and MR-BS in Figure 3)  
10 transmit its amble over the same time, and ask one RS (i.e. RS<sub>1</sub> in Figure 3) scan those ambles. Therefore, the  
11 receiver can identify the transmitter ID and measure the strength if the ambles at the same time.

12

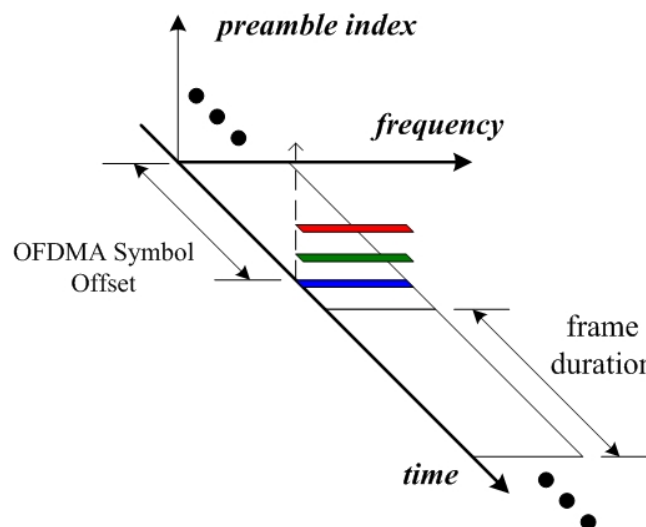

13


1 Fig.4 An example to arrange the scanning opportunity over the same OFDMA symbol offset

2  
3 After the measurement, each station can report the RSSI or the CINR with corresponding transmitter ID to  
4 the MR-BS or other coordinator in backhaul network.

5 Note that this mechanism may not only be applicable within one MR cell but also be applicable for multi-cell  
6 environment. For the multi-cell environment, the reference signal may be the ambles transmitted from the  
7 stations in other cells, i.e. the preamble indexes in RS\_NBR-MEAS-REQ defined in section IV may be the  
8 indexes used in other cells. In this case, the measurement alignment parameters for inter-cell coordination will  
9 be needed for the RS\_NBR-MEAS-REQ message.

10  
11 **III. An example to perform interference and SINR prediction based on the neighborhood measurement**  
12 **results**

13  
14 In Figure 5, an example with 4 stations (1 MR-BS and 3 RSs) is presented to illustrate how we can predict the  
15 interference and SINR level for different resource reuse scenario and MR network topology. According to the  
16 aforementioned RS scanning mechanism, each station can transmit an amble for other stations to perform  
17 measurement and identification. Therefore, the MR-BS can have the knowledge of the RSS (Received Signal  
18 Strength) from each other, as shown in Figure 5.

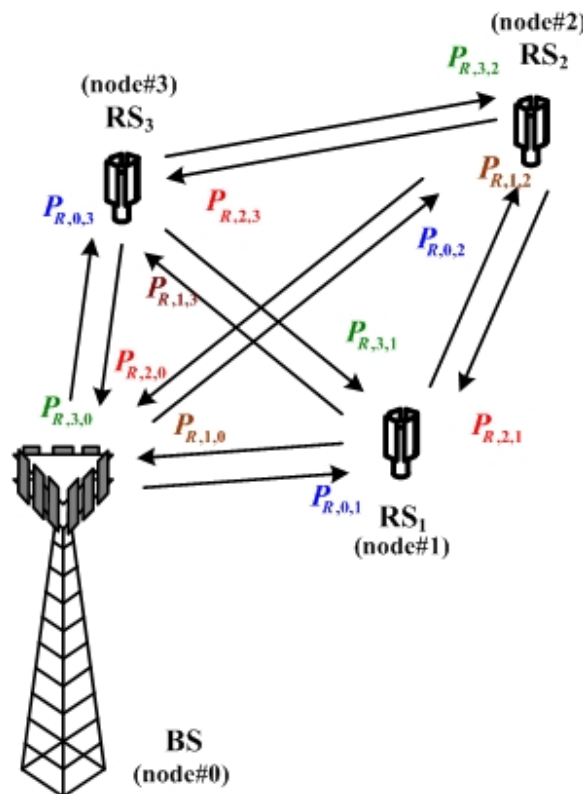

20  
21 Fig.5 An example to illustrate the interference and SINR prediction

22  
23 After each station reports its measurement results, the RSS matrix as shown in Figure 6 can be obtained at the  
24 MR-BS. Note that the interference generated by the stations which is not involved in this mechanism is

1 considered as the background interference in this example. Therefore, the parameter  $P_{R,i,i}$  is defined as the  
 2 received thermal noise power plus background interference power by node  $\#i$ .

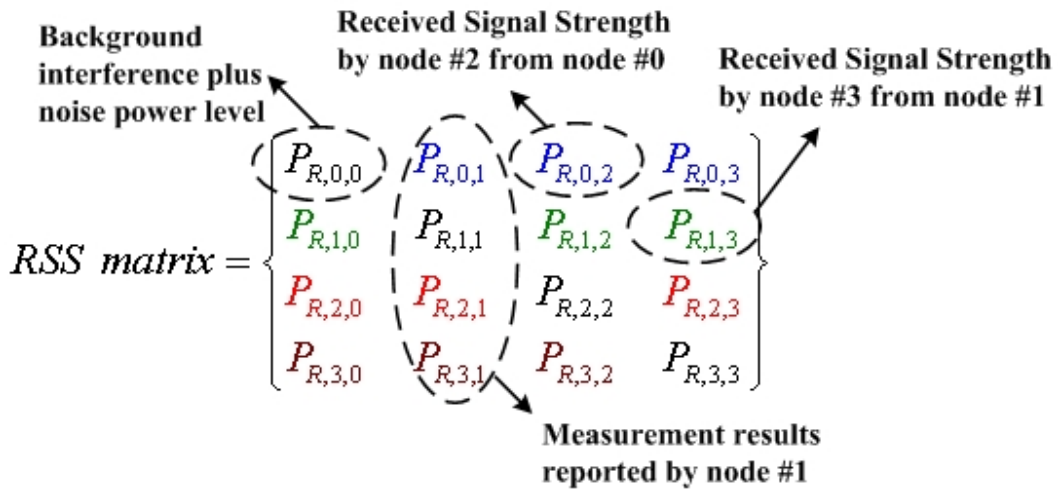


Fig.6 RSS matrix recorded by the MR-BS

7 According to the RSS matrix presented in Figure 6, the MR-BS or the coordinator can predict the interference  
 8 and SINR level for each resource reuse scenario and MR network topology, which can be presented as  
 9 following. Figure 7 represents the first example for the prediction under the topology #1, and here we define the  
 10  $L_{i,j}$  to indicate the radio link from node  $\#i$  and node  $\#j$ .

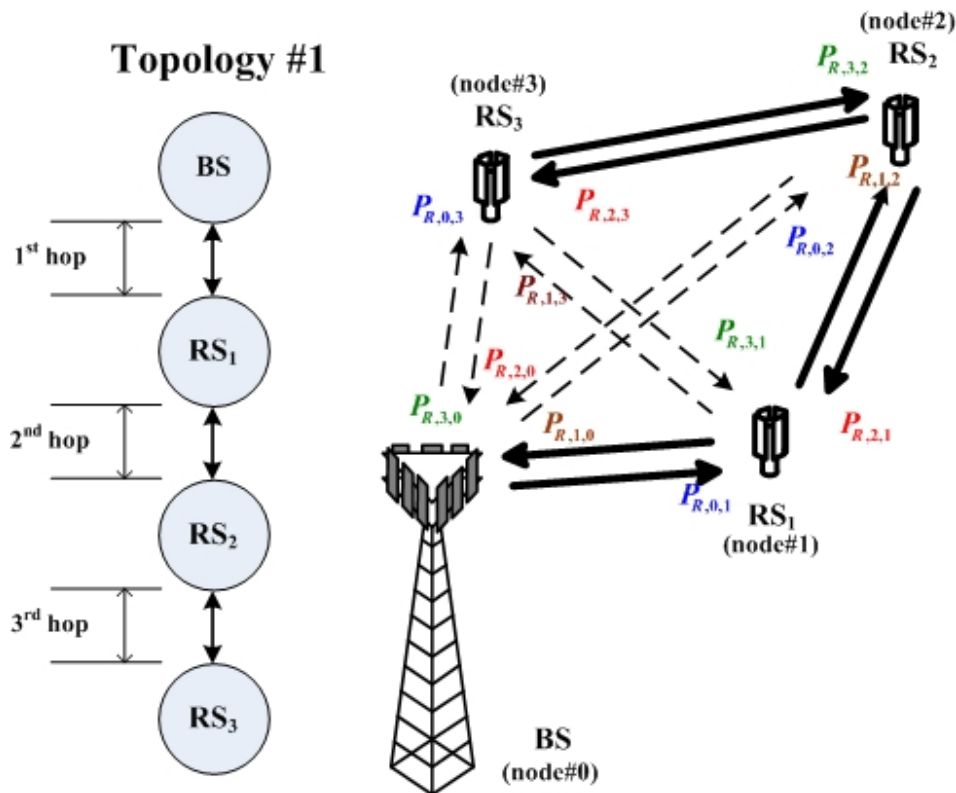


Fig.7 An example for interference and SINR prediction under Topology #1

According to the Topology #1, the interference and SINR prediction of each resource reuse scenario is shown as Table 1. Note that  $\{L_{i,j}, L_{x,y}\}$  defines that the link  $L_{i,j}$  and the link  $L_{x,y}$  are “reusing the same radio resources” but transmitting “different data”, and each station is assumed not able to transmit and receive at the same time. Therefore,  $L_{i,j}$  and  $L_{x,y}$  will not interfere each other if they are not reuse the same radio resources (i.e.  $\{L_{i,j}\}, \{L_{x,y}\}$ ). Note that the following prediction results are represented in linear values (not in dB).

Tab.1 Predicted Received Interference and SINR Level based on the RSS Matrix and Topology #1

Reuse Scenario		Predicted Received Interference Level			
		Node #0	Node #1	Node #2	Node #3
DL	$\{L_{0,1}\}, \{L_{1,2}\}, \{L_{2,3}\}$	<i>Null</i>	$P_{R,1,1}$	$P_{R,2,2}$	$P_{R,3,3}$
	$\{L_{0,1}, L_{2,3}\}, \{L_{1,2}\}$	<i>Null</i>	$P_{R,2,1} + P_{R,1,1}$	$P_{R,2,2}$	$P_{R,0,3} + P_{R,3,3}$
UL	$\{L_{3,2}\}, \{L_{2,1}\}, \{L_{1,0}\}$	$P_{R,0,0}$	$P_{R,1,1}$	$P_{R,2,2}$	<i>Null</i>
	$\{L_{1,0}, L_{3,2}\}, \{L_{2,1}\}$	$P_{R,0,3} + P_{R,0,0}$	$P_{R,1,1}$	$P_{R,2,1} + P_{R,2,2}$	<i>Null</i>
Reuse Scenario		Predicted Received SINR Level			
		Node #0	Node #1	Node #2	Node #3
DL	$\{L_{0,1}\}, \{L_{1,2}\}, \{L_{2,3}\}$	<i>Null</i>	$\frac{P_{R,0,1}}{P_{R,1,1}}$	$\frac{P_{R,1,2}}{P_{R,2,2}}$	$\frac{P_{R,2,3}}{P_{R,3,3}}$
	$\{L_{0,1}, L_{2,3}\}, \{L_{1,2}\}$	<i>Null</i>	$\frac{P_{R,0,1}}{P_{R,2,1} + P_{R,1,1}}$	$\frac{P_{R,1,2}}{P_{R,2,2}}$	$\frac{P_{R,2,3}}{P_{R,0,3} + P_{R,3,3}}$
UL	$\{L_{3,2}\}, \{L_{2,1}\}, \{L_{1,0}\}$	$\frac{P_{R,1,0}}{P_{R,0,0}}$	$\frac{P_{R,2,1}}{P_{R,1,1}}$	$\frac{P_{R,3,2}}{P_{R,2,2}}$	<i>Null</i>
	$\{L_{1,0}, L_{3,2}\}, \{L_{2,1}\}$	$\frac{P_{R,1,0}}{P_{R,3,0} + P_{R,0,0}}$	$\frac{P_{R,2,1}}{P_{R,1,1}}$	$\frac{P_{R,3,2}}{P_{R,0,2} + P_{R,2,2}}$	<i>Null</i>

Then, consider the second prediction example under the Topology #2, which is shown in Figure 8. In Topology #2,  $RS_1$  and  $RS_2$  are transmitting the same data over the same resource region so that they act like a single station from the receiver’s point of view, and they are defined to be within the same cluster (or group) [7] for this example. Therefore, the notation  $[L_{i,j}, L_{x,y}]$  defines that the links  $L_{i,j}$  and  $L_{x,y}$  are “reusing the same radio resources” and transmitting “the same” data over the same resource region, which acts like a virtual station as defined in [8], so that the radio signals of both links are combined over the air from receiver’s point of view.



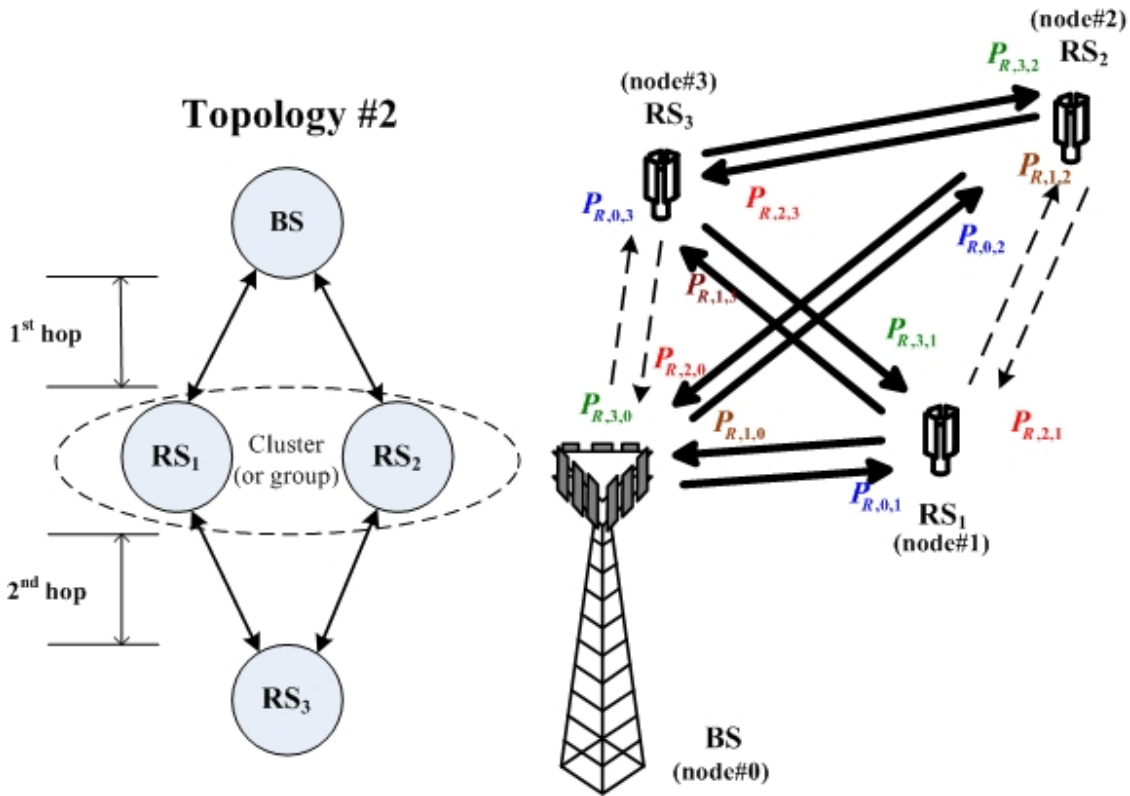


Fig.8 An example for interference and SINR prediction under Topology #2

Therefore, the interference and SINR level for each reuse scenario can be predicted as the results in Table 2. Note that the links with the transmitters which are the stations within the same cluster shall be treated as one logical link.

Tab.2 Predicted Received Interference and SINR Level based on the RSS Matrix and Topology #2

Reuse Scenario		Predicted Received Interference Level			
		Node #0	Node #1	Node #2	Node #3
DL	$\{L_{0,1}\}, \{L_{0,2}\},$ $[L_{1,3}, L_{2,3}]$	Null	$P_{R,1,1}$	$P_{R,2,2}$	$P_{R,3,3}$
UL	$\{L_{3,1}\}, \{L_{3,2}\},$ $[L_{1,0}, L_{2,0}]$	$P_{R,0,0}$	$P_{R,1,1}$	$P_{R,2,2}$	Null
Reuse Scenario		Predicted Received SINR Level			
		Node #0	Node #1	Node #2	Node #3
DL	$\{L_{0,1}\}, \{L_{0,2}\},$ $[L_{1,3}, L_{2,3}]$	Null	$\frac{P_{R,0,1}}{P_{R,1,1}}$	$\frac{P_{R,0,2}}{P_{R,2,2}}$	$\frac{P_{R,1,3} + P_{R,2,3}}{P_{R,3,3}}$

UL	$\{ L_{3,1} \}, \{ L_{3,2} \},$ $[, L_{1,0}, L_{2,0}]$	$\frac{P_{R,1,0} + P_{R,2,0}}{P_{R,0,0}}$	$\frac{P_{R,3,1}}{P_{R,1,1}}$	$\frac{P_{R,3,2}}{P_{R,2,2}}$	Null
----	---	---	-------------------------------	-------------------------------	------

In summary, when predicting the interference level based on the RSS matrix, the interference of specific receiver node #i can be the summation of:

1. The thermal noise power and background interference power.
2. The RSS of the stations which transmit over the same resource region but their target is not node #i.

In addition, when predicting the SINR level of specific receiver node #i based on the RSS matrix and the aforementioned interference prediction results:

1. Its denominator can be the aforementioned interference prediction result
2. Its nominator can be the RSS which transmit over the same resource region and their target is node #i.

#### IV. Text proposal

-----Start of the text-----

#### *Insert new subclause (6.3.2.3.62)*

##### 6.3.2.3.62 RS neighborhood measurement request (RS\_NBR-MEAS-REQ) message

The MR-BS can send a RS\_NBR-MEAS-REQ message to instruct RS neighborhood discovery and measurement. When an RS receiving this message with NBR\_MEAS\_MODE=0, it shall measure the reference signal over the designated Frame Number Offset and OFDMA symbol offset in downlink, and the message shall be sent with multicast CID or basic CID. When receiving this message with NBR\_MEAS\_MODE=1, the RS shall transmit the reference signal over the designated Frame Number Offset and OFDMA symbol offset in downlink, and the message can be sent with either multicast CID or basic CID. Note that the Report Request TLV is defined in 11.11.

Syntax	Size	Notes
RS_NBR-MEAS-REQ_Message_Format() {		
Management Message Type = TBD	8 bits	
NBR_MEAS_MODE	1 bit	0: Receive 1: Transmit
Frame Number Offset	8 bits	Units are frames
Measurement Duration	8 bits	Units are frames
Interleaving Interval	8 bits	Units are frames
Measurement Iteration	8 bits	Units are frames
OFDMA Symbol Offset	8 bits	The DL OFDM symbol location to scan the reference signal. If the Amble location is always fixed, then this field shall be removed from this message.
If (NBR_MEAS_MODE==0){		

N_NBR_LIST	8 bits	Number of neighboring stations in the neighbor list
Begin PHY Specific Section {		
For (i=0, i<N_NBR_LIST, i++){		
Amble Index	8 bits	
}		
Report Request	1 bit	0: RSSI 1: CINR
}		
}		
}		

1  
2 Frame Number Offset

3 The RS shall transmit/receive the reference signal after waiting this designated number of frames

4  
5 Measurement Duration

6 Duration (in units of frames) of the requested neighborhood measurement period

7  
8 Interleaving Interval

9 The period (in units of frames) which is interleaved between Measurement Durations

10  
11 Measurement Iteration

12 The requested number of iterating measurement interval

13  
14 NBR\_MEAS\_MODE

15 Instruct the RS to transmit (if NBR\_MEAS\_MODE=1) or measure (if NBR\_MEAS\_MODE=0) the reference  
16 signal over the designated Frame Number Offset and OFDMA symbol offset

17  
18 Measurement duration

19 Duration (in unit of frames) where the RS shall transmit/measure the reference signal

20  
21 N\_NBR\_LIST

22 Number of neighboring stations in the neighbor list

23  
24 OFDMA Symbol Offset

25 The location of the reference signal to be transmitted or measured. If NBR\_MEAS\_MODE is set as 0, RS shall  
26 measure the reference signals over each segment at the designated OFDMA symbol offset.

27  
28 Amble index

29 Amble means preamble, midamble or postamble. It will be determined by amble location in downlink relay  
30 zone.

31  
32  
33 *Insert new subclause (6.3.2.3.63)*

34  
35 6.3.2.3.63 RS neighborhood measurement report (RS\_NBR-MEAS-REP) message

Syntax	Size	Notes
RS_NBR- MEAS -REP_Message_Format() {		
Management Message Type = TBD	8 bits	

N_NBR_LIST	8 bits	Number of neighboring stations in the neighbor list
Begin PHY Specific Section {		
For (i=0, i<N_NBR_LIST, i++){		
Amble Index	8 bits	
Report Response TLVs	Variable	TLV specific
}		
}		
}		

1  
2 N\_NBR\_LIST

3 Number of neighboring stations in the neighbor list

4  
5 The RS\_NBR- MEAS -REP shall contain the Report Response TLV (define in 11.11 REP-RSP management  
6 message encodings).

7  
8 Amble index

9 Amble means preamble, midamble or postamble. It will be determined by amble location in downlink relay  
10 zone.

11  
12 *Insert a the following text into 6.3.26*

13  
14 6.3.26 Relay station neighborhood discovery

15  
16 When a RS newly deployed into a MR network, it can act as a SS/MS and scan the preamble transmitted by the  
17 existing stations before network entry. the RS can report its initial neighborhood discovery and measurement  
18 results to MR-BS by RS\_NBR-MEAS-REP (6.3.2.3.63). The neighboring station list may instructed by  
19 MR\_NBR-INFO (see 6.3.x.x), Since not every RS will transmit preamble or transmit its own amble, MR-BS  
20 can instruct the RSs to perform complete neighborhood discovery by following mechanism:

21 First, the MR-BS sends a RS\_NBR-MEAS-REQ message to the target RS with the NBR\_MEAS\_MODE set as  
22 0, and the message is sent by the basic CID or multicast CID of the target RS. Meanwhile, MR-BS sends  
23 another RS\_NBR-MEAS-REQ messages to other stations by the either multicast or basic CID with  
24 NBR\_MEAS\_MODE set as 1. Note that the Frame Number Offset and OFDMA symbol offset to instruct the  
25 transmission and measurement of the reference signal shall be synchronized.

26 Second, the neighbor stations transmit the reference signal at the designated OFDMA symbol offset for the  
27 measurement by target RS.

28 Third, the target RS reports the measurement results with corresponding amble index by RS\_NBR-MEAS-REP  
29 to MR-BS.

30  
31 *Insert a new subclause 6.3.27.1*

32  
33 6.3.27.1 Interference prediction by RS neighborhood measurement

1 In order to predict the potential interference or CINR before assigning the segments or allocating the radio  
 2 resources, the MR-BS may instruct the RS to measure the reference signals transmitted from other neighbor  
 3 stations and then report the measurement results to MR-BS. The procedure to perform RS neighborhood  
 4 measurement is defined in 6.3.26.

5 Before assigning the segment  $\#j$ , the interference that RS  $\#i$  may potentially received can be predicted by the  
 6 summation of:

- 7 1. The thermal noise power and background interference power.
- 8 2. The RSSI of the stations which use the segment  $\#j$  but not transmit data to RS  $\#i$ .

9 Moreover, the received CINR may be predicted by following criteria:

- 10 1. The denominator of the CINR may be the aforementioned interference prediction result.
- 11 2. The nominator of the CINR may be the RSSI of the stations which use the segment  $\#j$  and transmit data to  
 12 RS  $\#i$ .

13  
 14 -----End of the text-----  
 15  
 16

## 17 V. References

- 18 [1] IEEE C802.16j-06/169, "Reusing the Radio Resources in IEEE 802.16j Multi-hop Relay System."
- 19 [2] IEEE C802.16j-06/234, "Relay Grouping and PUSC Segment Selection for FCH/MAP Transmission."
- 20
- 21 [3] IEEE C802.16j-06/148, "Estimation of Initial Interference Matrix."
- 22 [4] IEEE C802.16j-06/216, "Relay-Station Power Control and Channel Reuse."
- 23 [5] IEEE C802.16j-06/225, "Directional Distributed Relay with Interference Control and Management."
- 24 [6] IEEE C802.16mmr-05/041, "System Performance of Relay-based Cellular Systems in Manhattan-like  
 25 Scenario."
- 26 [7] IEEE C802.16mmr-06/003, "On the Throughput Enhancement of Fixed Relay Concept in Manhattan-like  
 27 Urban Environment."
- 28 [8] IEEE C802.16j-06/168, "A RS Clustering Scheme for IEEE 802.16j."
- 29 [9] IEEE C802.16j-06/199, "Relay-Station Preamble Segment Assignment/Re-Assignment scheme."
- 30 [10] IEEE C802.16j-07/139, "Reduced Neighbor Information Generation and Customized Delivery."
- 31
- 32
- 33