

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Optimized Distributed Bandwidth Request and Allocation in 802.16j system	
Date Submitted	2007-05-10	
Source(s)	<p>Shulan Feng, Yanling Lu, Ting Li ,Liangliang Zhang Hisilicon Technologies Harbour Building, No.8, Dongbeiwang West Road, HaiDian District, Beijing, China</p> <p>Masato Okuda and Yuefeng Zhou Fujitsu</p> <p>Kanchei (Ken) Loa, Yi-Hsueh Tsai, YungTing Lee Institute for Information Industry 8F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan</p> <p>Mary Chion ZTE Corporation 712/2, Liantang Pengji Industrial Park, Luohu District, Shenzhen, P.R.China 518004</p>	<p>Voice: 86-10-82829010 Fax: 86-10-82829075 mailto:luyanling@hisilicon.com, fengsl@huawei.com</p> <p>mailto: okuda@jp.fujitsu.com Yuefeng.Zhou@uk.fujitsu.com</p> <p>Voice: +886-2-2739-9616 E-mail: loa@iii.org.tw</p> <p>E-mail: mchion@zteusa.com</p>
Re:	This contribution is a response to " IEEE 802.16j-07/013 Call for Technical Comments regarding IEEE Project 802.16j" (2007-04-02) .	
Abstract	This contribution describes a proposed distributed scheduling in 802.16j system.	
Purpose	This document is provided in response for Call for Technical Comments and Contributions regarding IEEE Project 802.16j .	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after	

further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

Distributed Scheduling In 802.16j System

Shulan Feng, Yanling Lu , Ting Li, Liangliang Zhang

Hisilicon Technologies

Masato Okuda and Yuefeng Zhou

Fujitsu

Kanchei (Ken) Loa, Yi-Hsueh Tsai, Yung-Ting Lee

Institute for Information Industry

Mary Chion

ZTE

1. Introduction

This document proposes a mechanism to reduce the time delay of data/bandwidth-request transfer and improve the uplink bandwidth utilization in a distributed scheduling MR system.

In a distributed scheduling MR system[1], when the MR-BS needs to grant the unsolicited bandwidth to the MS through the intermediate RSs along the multi-hop link on a periodic time basis, the bandwidth granted by the super ordinate RS may be wasted because user data doesn't reach the intermediate RS. The user data should be stored in the intermediate RS to wait for the next granted bandwidth, which leads to large latency. Obviously, the same problem exists when the MR-BS needs to poll the MS unsolicited through the intermediate RSs on a periodic basis.

Figure1 is an example of the grant procedure in the MR system with distributed scheduling. Figure 2 is an example of the polling procedure in the MR system with distributed scheduling

Since the distributed scheduling should be used in some cases, for example, to extend the coverage, it is necessary to guarantee the service flow's QoS for UGS, rtPS, extended rtPS, nrtPS and BE service. We propose a mechanism to optimize the distributed scheduling in order to reduce the time delay of data/bandwidth-request transfer and improve the uplink bandwidth utilization in the MR system with distributed scheduling.

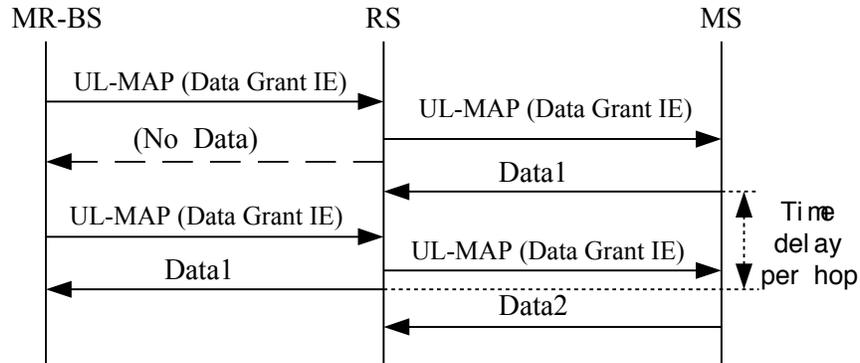


Figure 1 An example of the periodic grant procedure in the distributed scheduling system

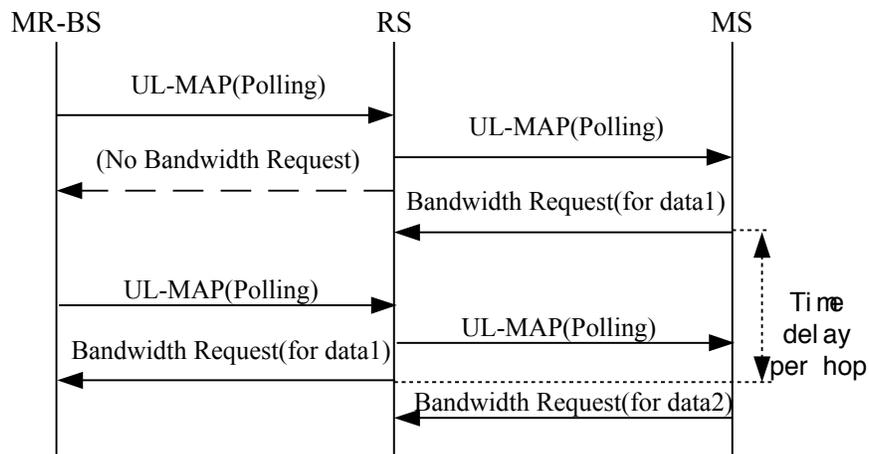


Figure 2 An example of the periodic polling procedure in a distributed scheduling MR system.

2. Optimized grant and polling mechanism for distributed scheduling

2.1 Optimized Periodic Bandwidth Grant

In a MR system the grant can be issued unsolicited by each link's super ordinate node or as a response to the bandwidth request from the subordinate node.

If the 802.16j system grants unsolicited bandwidth to the MS on a periodic time basis, the RS scheduling information is generated by the MR-BS firstly and sent to its subordinate node, based on the QoS of service flow and so on. RS scheduling information may include the transport CID on which the user data traffic is carried, the frame offset to indicate when the bandwidth will be granted and the size of bandwidth allocation. When the subordinate node receives the RS scheduling information, it will generate new RS scheduling information for its own subordinate node, according to the received RS scheduling information, processing delay inside and so on. In this way, RS scheduling information will be generated by the super ordinate node and sent to the subordinate RS of each hop link in turn. However the MS's access station should not send this information to the MS, so there is no any change for the MS.

Figure3 illustrates the proposed periodic grant mechanism in a distributed scheduling system.

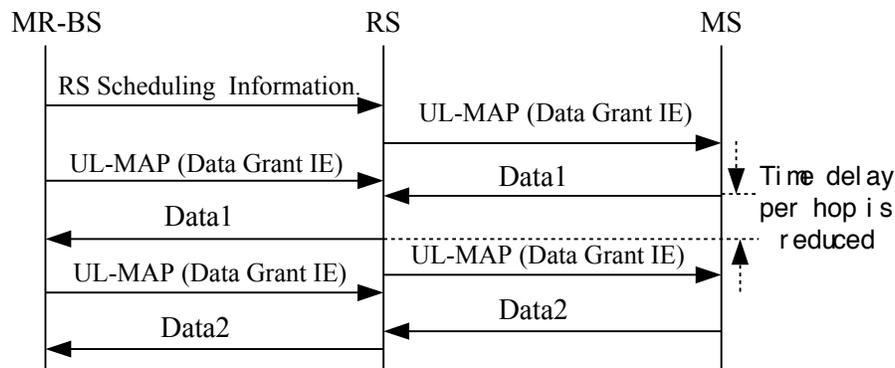


Figure 3 An example of proposed periodic grant mechanism

2.2.3 Optimized Periodic Polling

Similar to the bandwidth grant, the polling in the 802.16j system is not an explicit message, but a bandwidth allocation in the UL_MAP. The polling can be issued unsolicited or as a response to the Grant Management Message with PM bit set, which is set by a MS with currently active UGS connection when the MS needs to be polled to request bandwidth for non-UGS connection. When the unsolicited polling is issued on a periodic time basis, the RS scheduling information may also be used to accelerate bandwidth request transfer.

Figure 4 illustrates the proposed periodic polling mechanism in a distributed scheduling system.

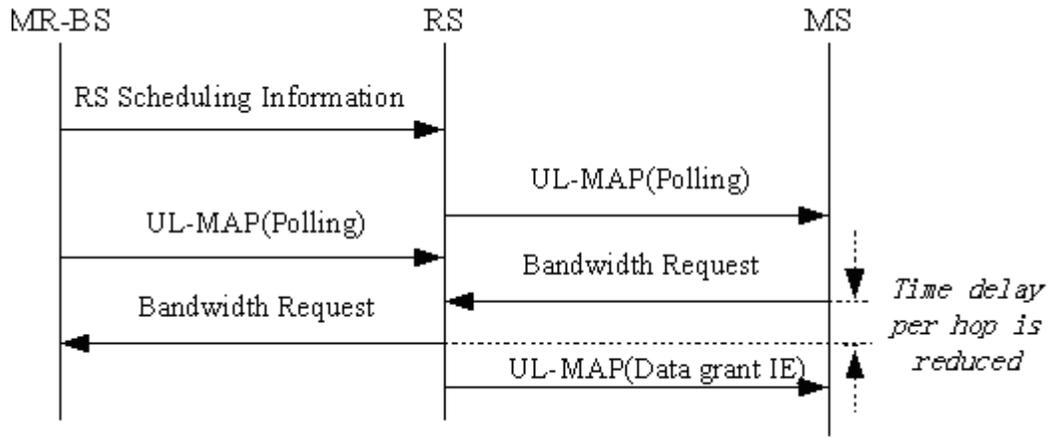


Figure 4 An example of proposed periodic polling procedure in a distributed scheduling system

3. Proposed text

6.3.2.3 MAC management message

[Add one row into Table 14:]

Type	Message Name	Message Description	Connection
<TBD>	RS-RSH	RS scheduling information	Basic

Insert new subclause 8.4.5.4.29

6.3.2.3.xx RS-SCH

This message specifies the uplink allocation for the receiving RS used for relaying bursts in the distributed scheduling, and is not applicable to MS/SS.

Table XX – RS-SCH message format

Syntax	Size	Notes
RS_SCH_Message_format() {		
Management Message Type	8bits	TBD

<u>CID</u>	<u>16 bits</u>	<u>The CID for the MS</u>
<u>RS UL Allocation Frame Offset</u>	<u>8 bits</u>	<u>In terms of number of frames</u>
<u>Bandwidth</u>	<u>8 bits</u>	<u>In number of bytes</u>
}		

CID

Indicates the CID, for which the allocation will be used.

RS UL Allocation Frame Offset

Indicates the number of frame, starting from the next frame, in which the bandwidth grant for RS is valid.

Bandwidth

Indicates the size of the allocation, in units of bytes

6.3.5 Scheduling services

6.3.5.2.1 UGS

[Insert the following at the end of this clause:]

In the MR system with distributed scheduling, to meet a UGS service flow's need, the MR- BS and RSs along the path shall grant fixed size bandwidth to its subordinate node on a real-time periodic basis.

In the multi-hop relay system with distributed scheduling, the MR-BS may send RS scheduling information (RS-SCH management message) in advance to its subordinate RS to indicate when and how much bandwidth it will schedule for the service in the future.

6.3.5.2.2 rtPS

[Insert the following at the end of this clause:]

In the MR system with distributed scheduling, to meet an rtPS service flow's need, the MR- BS and RSs along the path shall poll its subordinate node on a real-time periodic basis. The MR-BS may send RS scheduling information (RS-SCH management message) to its subordinate RS to indicate when it will schedule a poll in the future.

6.3.5.2.2.1 Extended rtPS

[Insert the following at the end of this clause:]

In the MR system with distributed scheduling, to meet an Extended rtPS service's need, the MR- BS and RSs along the path shall grant dynamic size bandwidth to its subordinate node on a real-time periodic basis. The MR-BS may send RS scheduling information (RS-SCH management message) to its subordinate RS to indicate when and how much bandwidth it will schedule for the service in the future.

[Insert new sub clause 6.3.6.7]

6.3.6.7 Relay support for Scheduling

6.3.6.7.1 Distributed Scheduling

6.3.6.7.1.2 Grant

[Insert the following at the end of this clause:]

In MR system with distributed scheduling, the MR-BS or a RS may send its RS scheduling information (RS-SCH management message) in advance to its subordinate RS, to indicate when and how much bandwidth it will schedule for the real time service in the future. The RS scheduling information (RS-SCH management message) includes the CID on which the user traffic is carried, the frame offset to indicate when the bandwidth will be granted and the size of bandwidth allocation. The actual grant is issued using Data Grant IE as defined for single hop case. For periodical bandwidth grant, RS scheduling information (RS-SCH management message) could be sent just once.

RS scheduling information (RS-SCH management message) is generated by the MR-BS and sent to its subordinate RS until the MS's access station is reached. Figure 1 illustrates the bandwidth grant procedure using RS scheduling information (RS-SCH management message).


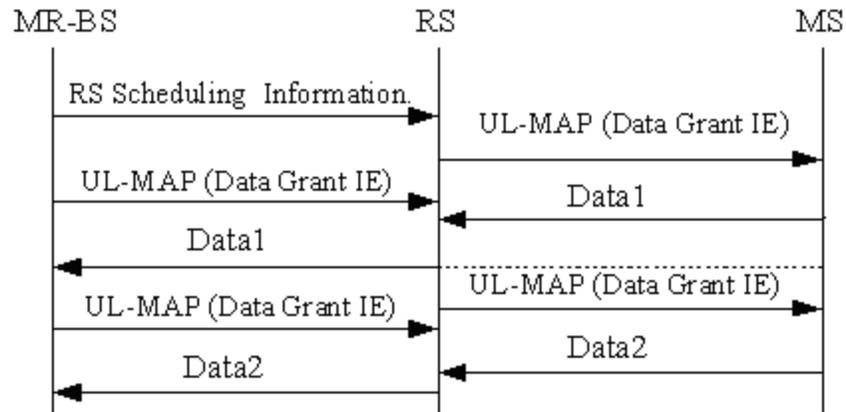


Figure 1 Periodic Bandwidth Grant with RS scheduling information

6.3.6.7.1.3 Polling

[Insert the following at the end of this clause:]

Similar to the bandwidth grant, the periodic polls issued by the MR-BS or a RS to its subordinate RS may be accompanied with RS scheduling information (RS-SCH management message). The RS scheduling information (RS-SCH management message) is generated by the MR-BS and sent to its subordinate RS until the access RS is reached. Figure 2 illustrates the polling procedure using RS scheduling information.

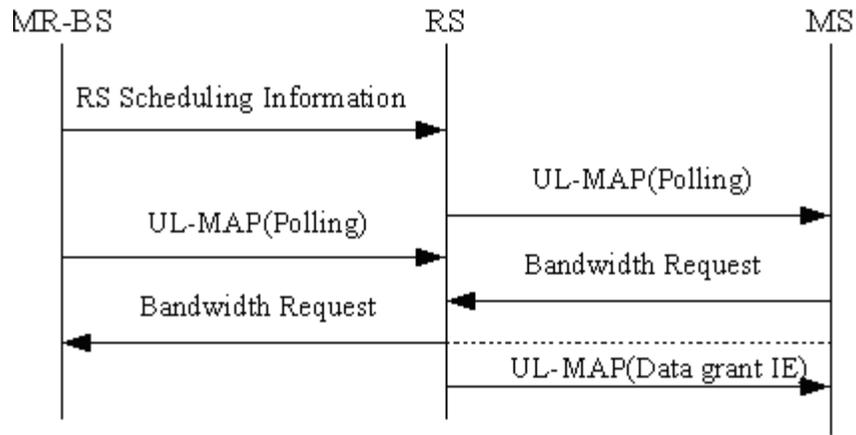

[Figure 2 Periodic Polling with RS scheduling information](#)

References

- [1] IEEE C802.16j-07/011r3, "Distributed Bandwidth Request and Allocation in Multi-Hop Relay"