

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	<u>Fix on</u> The configuration of MAPs and IEs for comparatively dynamic super frame in multi-hop relay network	
Date Submitted	[2007-05-08]	
Source(s)	CHEN Yuqin, QU Hongyun, Standard Research Department/ ZTE Corporation 706, 3F, Pengji Industry District, Lian Tang, Shenzhen, P.R.China	Voice: +86 13632552601 [chen.yuqin@zte.com.cn]
Re:	IEEE802.16j-06/034: "Call for Technical Proposals regarding IEEE802.16j"	
Abstract	This contribution proposes a comparatively dynamic super frame structure to support flexible payload ratio between access and relay links.	
Purpose	To propose configuration of MAP and IEs for comparatively dynamic super frame structure to support flexible payload ratio between access and relay links without very high overhead.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair	

<<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

A Proposal of the configuration of MAP and IEs for Multi-hop Relay Network

CHEN Yuqin, QU Hongyun

ZTE Corporation

Introduction

Super frame structure configuration summarized in the baseline consists of fixed access zone and relay zone. Actually, the variant payload ratio between access and relay links requires a more flexible super frame structure to improve the resource efficiency. To solve this problem without very high overhead, we propose a comparatively dynamic super frame structure where the relay zone position can be reset and maintained for a duration according to some factors such as the network topology or the traffic payload ratio between access and relay links. BS and RSs control the relay zone position of super frame throughby management messages. Moreover, to avoid interference to management messages in relay zone, simultaneous switch from access zone to relay zone among BS and RSs is considered. Since the last hop RSs connect without subordinate RSs, all resource could be allocated to MSs to support access link transmission.

In current baseline R-FCH is used to indicate the position of relay zone for next frame. Actually the parameter in R-FCH is not specified to be used for DL or UL relay zone. Now we assume this parameter is specific for DL relay zone position of next frame. But this scheme can not guarantee the alignment of DL/UL relay zones of MR-BS and all the RSs in the relay path at the same frame. And there is also a relay frame configuration message to configure the multiple frames. Basically we think the configuration message can cover the scenarios where the parameter 'RS_Zone_Location' in R-FCH is addressing.

So we propose to remove this parameter 'RS_Zone_Location' from R-FCH.

Proposal

The proposed super frame structures of BS, intermediate RSs and the last hop RS are illustrated in Fig. 1. Since transmission of management messages in each hop requires time delay including transmission delay, processing delay and queuing delay, etc, in order to have all BS and RSs switch to relay zone at the same time, BS needs to send the following frames' relay zone position in advance. BS is able to be aware the maximum delay that management messages takes to transmit between BS and the last hop RS.

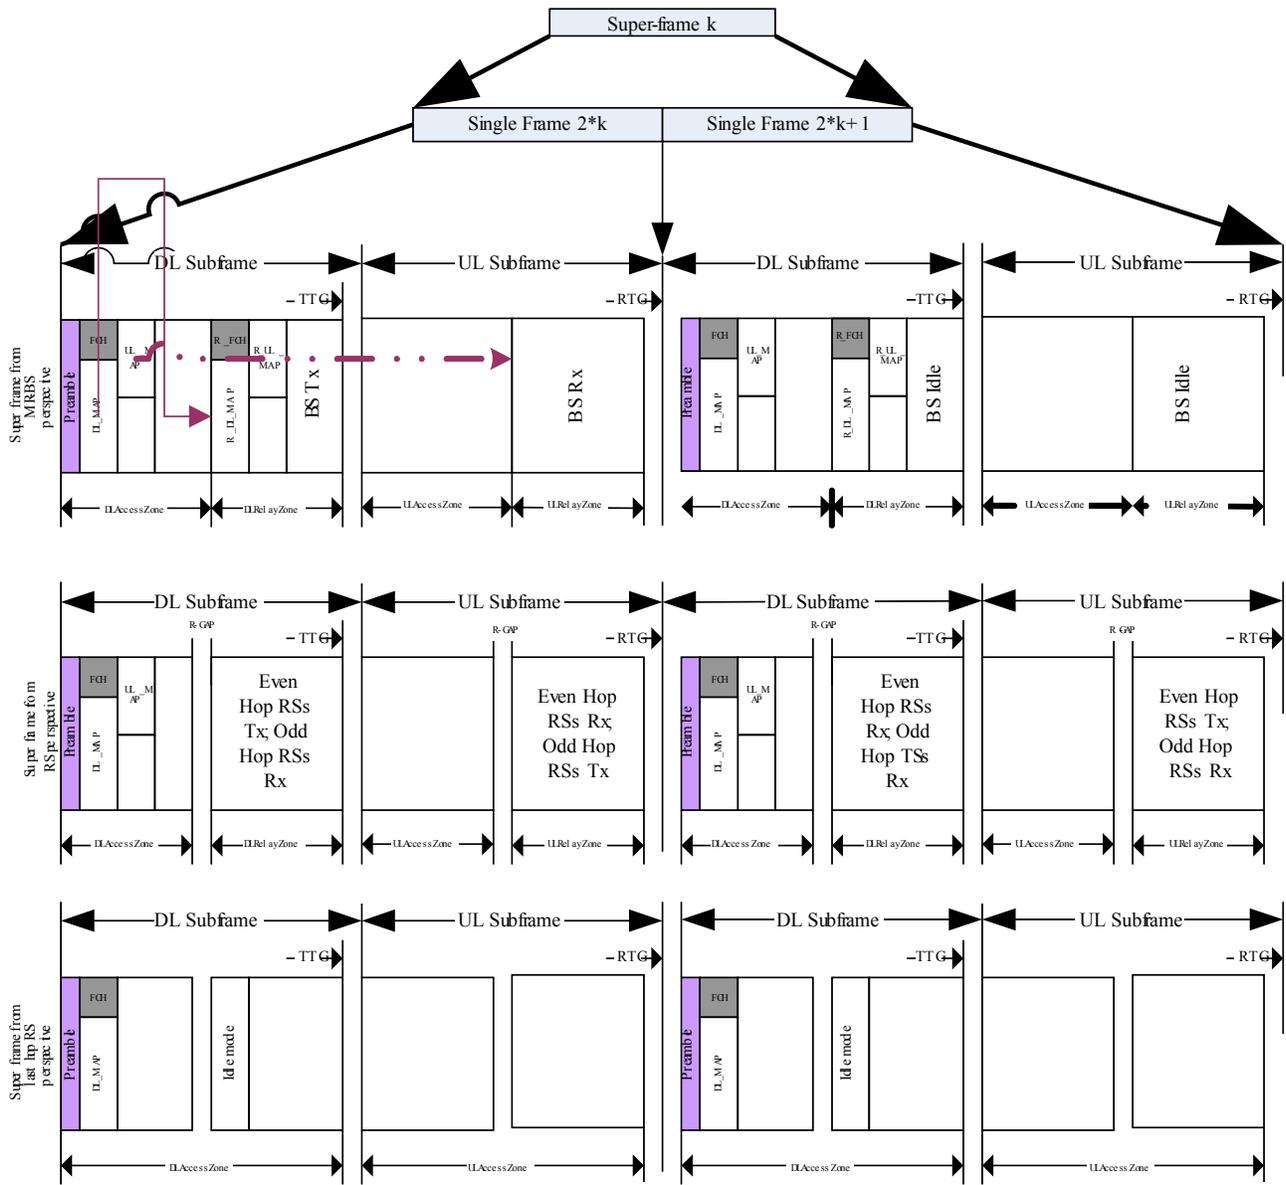


Fig. 1 Dynamic Super Frame Structure.

In this proposal, two single frames are contained in the super frame where the first one is defined as odd frame and the second one as even frame. BS sends out the following super frames' related relay zone change information in current odd frame. The required time duration in advance should be larger than the maximum delay and be integral times of super frame length. The position could be the relay zone start time in units of OFDMA symbol.

Once BS determines to change the relay zone position, it denotes RSs to get ready to change by R-DL-MAP. BS also indicates RSs the time point to change and the newly updated relay zone position. The time point to change could be depicted as the super frame number using “absolute time” or “relative time”.

Because RSs utilize the management messages in access zone to process network entry, BS needs to denote the relay zone position of current frame in access zone. And MSs also should be indicated where the access zone margin is.

The last hop RS only connects with MSs in downlink, therefore, all resource could be allocated to access link transmission to improve efficiency. And the part assigned to management messages in relay zone is set as idle mode in order to avoid interference with other RSs’ management messages.

This super frame structure proposed here considers the fact that the traffic payload ratio between access and relay links is variant. It solves the resource inefficiency problem caused by fixed super frame structure without too high overhead. This method further improves the efficiency by allocating all resource to access zone in the last hop RSs, and the synchronous zone switch avoids the interference to management message in relay zone.

Specified Text Changes

According to the proposed text in IEEE 802.16j-06/026r2, we propose the following changes:

-----specific text change -----

8.4.4.7.4 RS-Zone Prefix

[to remove the parameter from the table – RS_Zone_Prefix Formt and the related parameter description]

Syntax	Size(bits)	Notes
RS_Zone_Prefix_format() {	-	-
RS_Zone_location	7	The field indicates the OFDM symbol index reference to the beginning of next frame in unit of 1 OFDM symbols
Used_subchannel_bitmap	6	Bit #0: Subchannel group 0 Bit #1: Subchannel group 1 Bit #2: Subchannel group 2 Bit #3: Subchannel group 3 Bit #4: Subchannel group 4 Bit #5: Subchannel group 5

R-MAP_length	5	Length in unit of slot
FEC Code type and modulation type	5	0b0000 = QPSK (CTC) 1/2 0b0001 = QPSK (CTC) 3/4 0b0010 = 16-QAM (CTC) 1/2 0b0011 = 16-QAM (CTC) 3/4 0b0100 = 64-QAM (CTC) 1/2 0b0101 = 64-QAM (CTC) 2/3 0b0111 = 64-QAM (CTC) 3/4 0b1000 = 64-QAM (CTC) 5/6 0b1001-0b1111 reserved
Repetition_Coding_Indication	1	0: No repetition coding on R-MAP 1: Repetition coding of 2 used on R-MAP
<u>Reserved</u>	<u>7</u>	
}		

RS_Zone location

An indicator regarding the location of RS_Zone in the next frame. The first OFDM symbol in each frame is indexed as 0. The RS_Zone location indicates the OFDM symbol index relative to the first OFDM symbol in next frame. The unit is 2 OFDM symbols.

----- end -----

~~Since MSs need to be aware the access zone margin without adding new MAPs, some definitions of IEEE 802.16-2004 are adjusted.~~

~~[Change the definition of “No. OFDMA Symbols in Table 275 “OFDMA DL-MAP_IE format” of IEEE802.16-2004]~~

No. OFDMA Symbols

~~The number of OFDMA symbols that are used (fully or partially) to carry the Access Zone Downlink PHY bursts.~~

~~[Change the definition of “No. OFDMA Symbols in Table 287 “OFDMA UL-MAP_IE format” of IEEE802.16-2004]~~

No. OFDMA Symbols

The number of OFDMA symbols that are used to carry the Access Zone Uplink PHY bursts.

[Insert a new section 8.4.5.3.28]

8.4.5.3.28 MR-DL-Relay-Zone-Location-IE

In the DL-MAP, BS and RS shall transmit DIUC=15 with MR-DL-Relay-Zone-Location-IE() to indicate the downlink relay zone position of current frame. This IE is addressed dedicatedly to RS.

Table xxx DL-MAP IE message format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>MR-DL-Relay-Zone-Location-IE()</u>		
$\frac{1}{2}$		
<u>Extended-DIUC</u>	<u>4bits</u>	<u>0x09</u>
<u>Length</u>	<u>4bits</u>	
<u>OFDMA symbol offset</u>	<u>32 bits</u>	<u>Indicating the start of DL Relay Zone in the current frame, counting from the frame preamble and starting from 0.</u>
<u>No. OFDMA Symbols</u>	<u>8bits</u>	<u>The number of OFDMA symbols in the DL Relay Zone.</u>
$\frac{1}{2}$		

OFDMA symbol offset

An indicator regarding the DL Relay Zone Position in the current downlink frame.

No. OFDMA Symbols

The number of OFDMA symbols in the DL Relay Zone.

8.4.5.4.29 MR-UL-Relay-Zone-Location-IE

In the UL-MAP, BS and RS shall transmit UIUC=15 with MR-UL-Relay-Zone-Location-IE() to indicate the uplink relay zone position of current frame. This IE is addressed dedicatedly to RS.

Table xxx +1 UL-MAP IE message format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>MR_UL_Relay_Zone_Location_IE()</u> <u>‡</u>		
<u>Extended_UIUC</u>	<u>4bits</u>	<u>0x09</u>
<u>Length</u>	<u>4bits</u>	
<u>OFDMA symbol offset</u>	<u>32 bits</u>	<u>Indicating the start of UL Relay Zone in the current frame, counting from the uplink start time and starting from 0.</u>
<u>No. OFDMA Symbols</u>	<u>8bits</u>	<u>The number of OFDMA symbols in the UL Relay Zone.</u>
<u>‡</u>		

OFDMA symbol offset

An indicator regarding the UL Relay Zone Position in the current uplink frame.

No. OFDMA Symbols

The number of OFDMA symbols in the UL Relay Zone.

[add new section 8.4.5.9 Relay Map message fields and IEs]

8.4.5.9 Relay Map message field and IEs:

In DL relay zone, BS and RS shall transmit R-DL-MAP and R-UL-MAP message. Especially, the access RS will not transmit R-DL-MAP and R-UL-MAP message in DL relay zone.

8.4.5.9.1 R-DL-MAP IE format

8.4.5.9.1.1 R-DL_Updated_Relay_Zone_Location IE

BS transmits R-DL_Updated_Relay_Zone_Location_IE in downlink relay zone to indicate RSs to get ready to change the relay zone position and the exact time when the change happens. The newly updated relay zone position should be also denoted. RSs receive this IE and restore the information about the position change of

downlink relay zone for the following frames. According to the received information, RSs transmit the location change information of downlink relay zone to their subordinate RSs.

Table xxx +2 R-DL_Updated_Relay_Zone_Location IE format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>R-DL_Updated_Relay_Zone_Location IE</u> <u>format ()</u>		
<u>DIUC</u>	<u>4bits</u>	
<u>Length</u>	<u>4bits</u>	
<u>R-RZ Position Change Count</u>	<u>32bits</u>	<u>Incremented by one(modulo 256) by the BS whenever the relay zone position is determined to change.</u>
<u>R-Time To Change</u>	<u>4bits</u>	<u>Indicating the exact time to change which could be expressed by absolute time or relative time.</u>
<u>R-OFDMA symbol offset</u>	<u>8bits</u>	<u>Indicating the newly updated relay zone position, counting from the frame preamble and starting from 0.</u>
<u>†</u>		

R-RZ Position Change Count

When BS determines to change relay zone position, it is incremented by one(modulo 256) to have RSs get ready to change relay zone position.

R-Time To Change

An indicator denoting the exact time to change which could be expressed by absolute time or relative time.

R-OFDMA symbol offset

An indicator denoting the newly updated relay zone position, counting from the frame preamble and starting from 0.

8.4.5.9.2 R-UL-MAP IE format

8.4.5.9.2.1 R-UL_Updated_Relay_Zone_Location_IE

BS transmits R-UL_Updated_Relay_Zone_Location_IE in R-UL_MAP message to indicate the newly updated uplink relay zone position. RSs receive this IE and restore the information about the location change of uplink relay zone for the following frames. According to the received information, RSs adjust the location of UL relay zone in the following frames and transmit the location change information of uplink relay zone to their subordinate RSs.

Table xxx+3 R-UL_Updated_Relay_Zone_Location_IE format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>R-UL_Relay_Zone_Location_Change_IE Format()</u>		
<u>UIUC</u>	<u>4bits</u>	
<u>Length</u>	<u>4bits</u>	
<u>R-OFDMA symbol offset</u>	<u>8bits</u>	<u>Indicating the newly updated relay zone position, counting from the uplink start time.</u>
<u>±</u>		
<u>±</u>		

R-OFDMA symbol offset

Indicating the newly updated relay zone position, counting from the uplink start time.

[Insert a new paragraph in the end of 8.4.4.7.2.2]

To improve the efficiency, the last access RS on the relay path is set idle mode in the bursts allocated to R_Preamble, R_FCH, R_MAPs of the DL relay zone and UL relay zone.

Reference:

[1] IEEE C802.16j-06/026r2, "P802.16j Baseline Document"

[2] IEEE C802.16j-07_276, "A proposal of the configuration of MAPs and IEs for multi-hop relay network"