

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	Secure Extended MAC Header Type II
Date Submitted	2007-03-28
Source(s)	Shashikant Maheshwari, Yousuf Saifullah, Yogesh Swami, Haihong Zheng, Adrian Boariu Nokia Siemens Networks 6000 Connection Drive, Irving, TX voice: 972 839 1878 mailto: shashikant.maheshwari@nsn.com
Re:	IEEE 802.16j-07/013: "Call for Technical comments and contributions regarding IEEE Project P802.16j"
Abstract	This document presents a mechanism for securing Extended MAC Header Type II.
Purpose	Propose an efficient signaling acknowledgment operations for IEEE 802.16j
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

Secure Extended MAC Header Type II

Introduction

The Extended MAC header type II was accepted in the 16j baseline document [1]. The MAC management messages are sent without encryption between MR-BS and RS. A rogue RS could read these messages and could send a false response. For example, it could send NAK instead of ACK (using Extended MAC Header Type II), and distort the information relevant to the procedure in MR-BS. As the MAC headers are not authenticated, a malicious user could also send a wrong BR header using Extended MAC header type II, causing deprivation of bandwidth in the system for the legitimate users. This contribution proposes a simple secured Extended MAC header type II for relay links.

A MAC header has 8-bit mandatory Authenticated Header Check Sum (A-HCS) field. Currently, the checksum is computed as the residue of the generator polynomial (D^8+D^2+D+1) . We propose that instead of computing the checksum as the standard residue, we compute the checksum using the message authentication code as mentioned below:

$$\text{A-HCS} = \text{CMAC}(\text{CMAC_KEY_U} \otimes \text{counter}, 5\text{-byte-checksum}) \bmod (D^8+D^2+D+1)$$

$$\text{A-HCS} = \text{HMAC}(\text{HMAC_KEY_U} \otimes \text{counter}, 5\text{-byte-checksum}) \bmod (D^8+D^2+D+1)$$

The operations in the above equations are described in the spec changes sections. In this way, the ACK header has error and integrity protection at the same time. The purpose of the counter is to ensure that even though the A-HCS is only 8 bits long, it's harder for the attacker to find a HCS collision and replay the message for bandwidth request.

Specific Text change

[Insert the following text after the first para in 6.3.2.1.2.2.2:]

This type of MAC header has 8-bit mandatory Authenticated Header Check Sum (A-HCS) field for providing error and integrity protection. A-HCS is computed using the message authentication code as mentioned below:

$$\text{A-HCS} = \text{CMAC}(\text{CMAC_KEY_U} \otimes \text{counter}, 5\text{-byte-checksum}) \bmod (D^8+D^2+D+1)$$

$$\text{A-HCS} = \text{HMAC}(\text{HMAC_KEY_U} \otimes \text{counter}, 5\text{-byte-checksum}) \bmod (D^8+D^2+D+1)$$

Where CMAC/HMAC KEY U is the CMAC/HMAC key that the RS has generated during key exchange and counter is a monotonically increasing number, which is of the same bit-length of CMAC/HMAC KEY U and \otimes indicates the XOR operation.

[Change only the HCS field in Figure XX to A-HCS:]

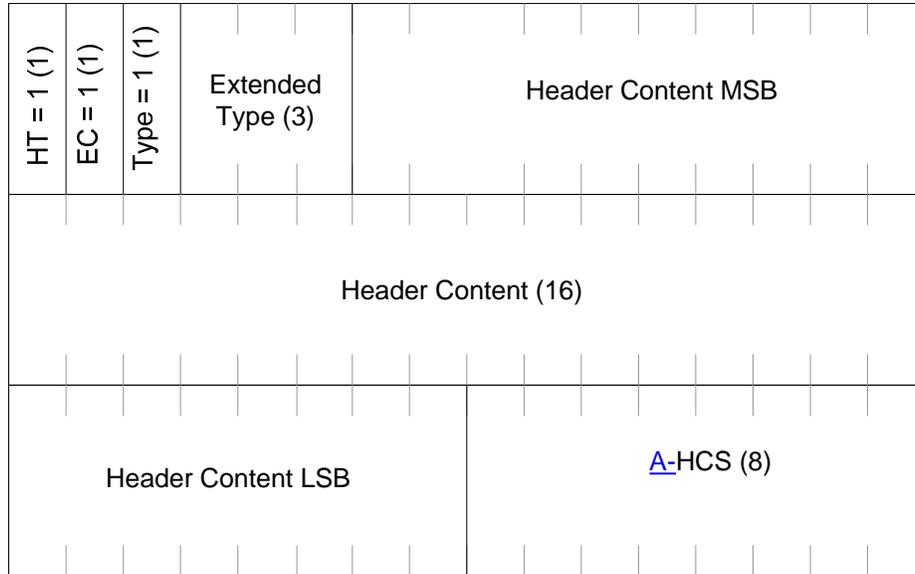


Figure XX Extended MAC Signaling Header Type II Format

References

- [1] IEEE802.16j-06/026r3 Baseline Document for Draft Standard for 16j
- [2] IEEE C802.16j_07/028r3 Message definition to support MS network entry in centralized allocation model