

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Some Clarifications on Virtual RS-Group Concept	
Date Submitted	2007-04-25	
Source(s)	Israfil Bahceci, Hang Zhang, Peiying Zhu, Mo-Han Fong, Wen Tong, David Steer, Gamini Senarath, Derek Yu, Mark Naden, G.Q. Wang	Voice: +1 613 7631315 [mailto:wentong@nortel.com] [mailto:pyzhu@nortel.com]
	Nortel 3500 Carling Avenue Ottawa, Ontario K2H 8E9	
Re:	A response to a Call for Technical Proposal, http://www.ieee802.org/16/relay/docs/80216j-07_013.pdf	
Abstract	We provide editorial changes on 6.3.9.16.3.1 and clarifications on RS grouping concept regarding the network entry, topology configuration and data forwarding.	
Purpose	To incorporate the proposed text into the P802.16j Baseline Document (IEEE 802.16j-06/026r3)	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Some Clarifications on Virtual RS Group Concept

Israfil Bahceci , Hang Zhang, Peiyong Zhu, Mo-Han Fong, Wen Tong, David Steer, Gamini Senarath,
Derek Yu, Mark Naden, G.Q. Wang,

Some characteristics of the Virtual RS-group is currently summarized in the baseline document. In this contribution, we clarify several issues related to creation/capability/configuration of virtual RS group. We also provide minor editorial text change for 6.3.9.16.3.1 in the baseline document.

Definitions

The following definitions are provided for the RS grouping concept:

Non-transparent group: The parent of the group is not a member of the group. Hence, the group employs a different preamble from that of the parent.

Group peer leader: The non-transparent RS of the RS Group. The peer leader transmits the preamble/FCH/MAP at all frames.

Transparent group: The parent is a member of the RS group. The group employs the same preamble as the parent.

Group parent leader: The parent of a transparent RS group. The group leader shall always transmit the preamble/FCH/MAP.

If an RS group includes an MR-BS, then the RS members of the group may be imagined as the second hop non-transparent RSs. If the group leader is a non-transparent RS, then this group leader may be imagined as a non-transparent RS at the j th hop, and all other members as a transparent RS either at j th hop, or at the $(j+1)$ th hop. Two examples are provided in Figure 1.

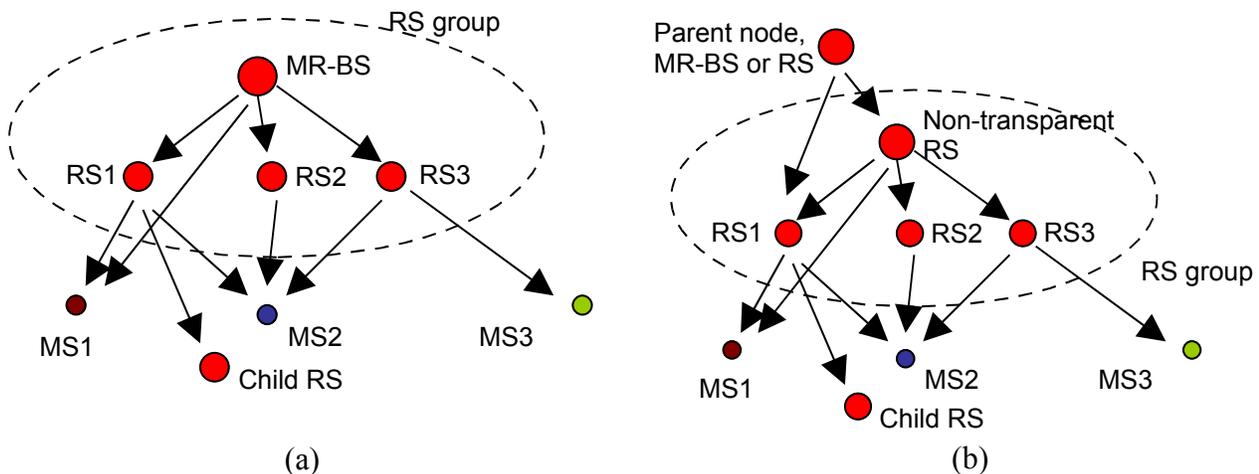


Figure 1 Example topologies for RS grouping

Network Entry to the RS Group

MS Network entry: The procedures in 6.3.9.16.1 or 6.3.9.16.2 is followed. The only difference is that, the MS may observe a superposition of preamble/FCH/MAP from the RS group members as it starts synchronization to the preamble signal.

Each RS group member has the DL/UL MAP, thus, during the initial ranging process, each RS group member can monitor the CDMA ranging codes from subordinate nodes; however, network entry process is governed by the group peer leader or the group parent leader. Other members of the group forwards RNG-REQ message to the group peer/parent leader with their Unicast RSID (or RS basic CID?) if the ranging codes are received with sufficient signal quality, and performs the procedure in 6.3.9.16.1. The group peer/parent leader (if not an MR-BS) performs the procedure in 6.3.9.16.2.

RS Network Entry: If the RS is in MS mode of operation, it starts with the regular MS network entry procedures above. After network entry, RS resumes normal operation. It reports 16e preamble and R-amble measurements to MR-BS and MR-BS may request this RS to implement R-amble monitoring scheme so that the neighbor RSs can perform measurements from this RS and report to the MR-BS. After collecting all measurements, the MR-BS configures the RS.

Topology Configuration

Topology configuration/reconfiguration may be performed during low-traffic periods, e.g., midnight, which we refer as 'topology configuration window'. All RSs are assigned R-ambles that can be employed to measure radio environment. RSs perform measurements and report them to the MR-BS. The MR-BS determines the network topology by configuring the RSs as transparent RS, non-transparent RS, peer/group leader, and member of an RS group.

On the other hand, it may also be necessary to perform topology configuration during operation time, e.g., on-going topology configuration. During an on-going topology configuration, member RSs are configured not to transmit preamble/FCH/MAP to avoid inaccurate signal measurements that can be caused by superposition of multiple signals. A RS may monitor either the 16 e preamble (if it is a network entry), or R-amble (if it is during normal operation) and report to the MR-BS. The MR-BS configures the RS.

An MR-BS may prevent the new entries to the RS group. This is referred as 'group closure phase' during which time no new members are allowed to enter the group. The member RSs can be configured to transmit preamble/FCH/MAP during this period.

In some cases, the members of the RS group may be assigned as a serving RS for another RS outside the group. This may be performed during the topology configuration window period by the MR-BS based on the signal measurements. During on-going configuration, the measurements based on the 16e preamble or R-amble can be employed to perform this. During the group closure period, the measurement/report methods based on UL signal measurements can be used.

Cooperative Diversity and Selective Forwarding

RS group may coexist with cooperative diversity protocol. That is, members of an RS group may be configured to transmit a space-time code (through RS-CDC message).

An RS-group shall also be enabled for selective forwarding. For example, assume RS1 serves to MS1 and RS3 serves to MS3 (e.g., because the associated wireless links are very good). In that case, RS1 may only need to forward the data for MS1, and RS3 to MS3, although both RS1 and RS3 have the traffic data for both mobiles. This can reduce the unnecessary interference and resource usage at both RSs. Note that there may another MS, e.g., MS2, which can receive signals from all RS1, RS2, and RS3 and perform RF diversity combining. An RS group already enables that sort of transmission.

In order to enable the RS group to perform the selective forwarding, we propose to couple the members of the RS group with the associated subordinate node(s). This coupling is implementation specific (e.g., potential interference, load balance, DL/UL link qualities, etc..) and can be performed during the network entry of an MS/SS and during normal operation. For an MS served by a RS group or member of a RS group, this coupling simplifies the handover process significantly since the handover is within the members of RS group which is enabled by this coupling procedure.

Text Changes

++++Start text ++++++

[Replace the following text in Subclause 6.3.9.16.3.1 as indicated below]

• When the virtual RS group includes an MR-BS, all the RSs in the virtual group shall either transmit the same preamble, FCH and MAP as the MR-BS or they all do not transmit any preamble/FCH/MAP.

[Delete the following text in Subclause 6.3.9.16.3.1 as indicated below]

• Different RS groups shall transmit different preambles.

[Insert the following text in Subclause 6.3.9.16.3.1 as indicated below]

• Selective forwarding capability within RS group: For DL, the members of an RS group may be associated with MSs/SSs or RSs such that they may forward traffic data for only their associated subordinate nodes. This may be done per terminal or per transport connection basis. In this way, by specifying scheduling times, two RSs belong to the same RS group may transmit to two different MSs/SSs in the same time. In addition, in a similar way it may be scheduled such that the multiple RSs in the RS group may transmit to the same MS to exploit macro-diversity. This is achieved by keeping a mobile list or CID list associated with each RS and RS would look for the data bound to its associated MSs and forward them in the assigned times under a centralised scheduling scheme.

For the UL, diversity combining of the information received by the members of RS group or it can be designed such that several members may receive data from multiple mobiles in the same time. This is possible by maintaining a list of MSs or CIDs which are associated with each RS and forwarding those messages in a

specified resource unit (time and frequency). When the MS is same and the resources are the same, it is equivalent to macro-diversity. When the resources are same but the MSs are different that is equivalent to selective parallel transmission.

Each time handover occur or a new MS joins an RS, the RSs CID list is updated to keep track of the MSs which are associated with a particular RS.

[Insert the following definitions to Section 3]

3.103: Group parent leader: The member RS or MR-BS in a RS group which is responsible for transmitting the preamble/FCH/MAP. The RS group employs the preamble of group parent leader.

3.104: Group peer leader: The member RS in a RS group which is responsible for transmitting the preamble/FCH/MAP. The RS group employs group peer leader leader's preamble which is different from the parent of the RS group.

[Insert Subclause 6.3.9.16.3.1.1]

6.3.9.16.3.1.1 MS Network Entry Procedures

Each RS group member has the same DL/UL MAP, thus, during the initial ranging process, each RS group member can monitor the CDMA ranging codes from subordinate nodes; however, network entry process is led by the group peer leader or the group parent leader. Other members of the group forwards RNG-REQ message to the group peer/parent leader with their Unicast RSID if the ranging codes are received with sufficient signal quality, and performs the procedure in 6.3.9.16.1. The group peer/parent leader (if not an MR-BS) performs the procedure in 6.3.9.16.2.

[Insert Subclause 6.3.9.16.3.1.2]

6.3.9.16.3.1.2 RS Network Entry Procedures

If the RS in MS mode of operation, it starts with the regular MS network entry procedures in 6.3.9.16.3.1.1. After network entry, RS resumes normal operation. The RS reports 16e preamble measurements to MR-BS and MR-BS may request this RS to implement R-amble monitoring scheme so that the neighbor RSs can perform measurements from this RS and report to the MR-BS. After collecting all measurements, the MR-BS configures the RS.

[Insert Subclause 6.3.9.16.3.1.3]

6.3.9.16.3.1.3. Topology Configuration

The configuration of RSs as non-transparent/transparent/member/peer leader/parent leader RS may be performed either as an ongoing process during normal operation, or within a specified period, called as 'topology configuration window'. The creation, maintenance and modification of an RS group may be performed during these two periods. Topology configuration may be based on signal quality measurements, e.g., using R-amble monitoring schemes described in the standard. The MR-BS collects measurement reports

regarding the link qualities and configure the RSs as transparent/non-transparent RSs, group peer leader, group parent leader, or member RS.

During an ongoing topology configuration, the member RSs are configured not to transmit preamble/FCH/MAP. The potential RS monitors 16e preamble or R-ambles and reports to the MR-BS. The MR-BS configures the RS.

During the ‘group closure period’, no new RSs can be configured as a member of this RS group. During the closure period, the members of the RS group can be configured to transmit preamble/FCH/MAP and R-amble.

Members of an RS group can be configured as serving station to an RS outside the group. During the topology configuration window period and on-going topology configuration period, the MR-BS may use R-amble or 16e preamble measurements to perform this configuration, while during group closure phase, the UL signal measurements may be employed.

During the periods other than the group closure periods, the RS group may be updated (e.g., acceptance of a new member RS, removal of a member RS from the group, change of parent/peer leader) based on the R-amble or 16e preamble radio measurements.