

A Frame Structure Design for OFDMA-based Multihop Relay Networks

IEEE 802.16 Presentation Submission Template (Rev. 8.3)

Document Number:

IEEE S802.16j-06/226

Date Submitted:

2006-11-07

Source:

Jeffrey Z. Tao, Koon Hoo Teo, Jinyun Zhang

Mitsubishi Electric Research Lab
201 Broadway, Cambridge, MA 02139, USA

Voice: 617-621-{7557, 7527}

Fax: 617-621-7550

Email: {[tao](mailto:tao@merl.com), [teo](mailto:teo@merl.com), [jzhang](mailto:jzhang@merl.com)}@merl.com

Toshiyuki Kuze

Mitsubishi Electric Corp.
5-1-1 Ofuna Kamakura, Kanagawa 2478501, JAPAN

Voice: +81-467-41-2885

Fax: +81-467-41-2486

Email: kuze.toshiyuki@ah.MitsubishiElectric.co.jp

Venue:

IEEE 802.16 Session #46, Dallas, Texas, USA

Base Document:

None

Purpose:

Propose extension and enhancement to the current frame structure in order to support OFDMA-based multihop relay networks.

Notice:

This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

IEEE 802.16 Patent Policy:

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://ieee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

A Frame Structure Design for OFDMA-based Multihop Relay Networks

Authors:

Jeffrey Z. Tao, Koon Hoo Teo, Jinyun Zhang

Mitsubishi Electric Research Lab

201 Broadway

Cambridge, MA 02139

Toshiyuki Kuze


Mitsubishi Electric Corp

5-1-1 Ofuna Kamakura, Kanagawa

2478501, Japan

Requirements


- A general multihop relay network may assume two possible basic topologies:
 - Range extension is the primary function of relay in topology 1.
 - Relay helps improve capacity in topology 2.

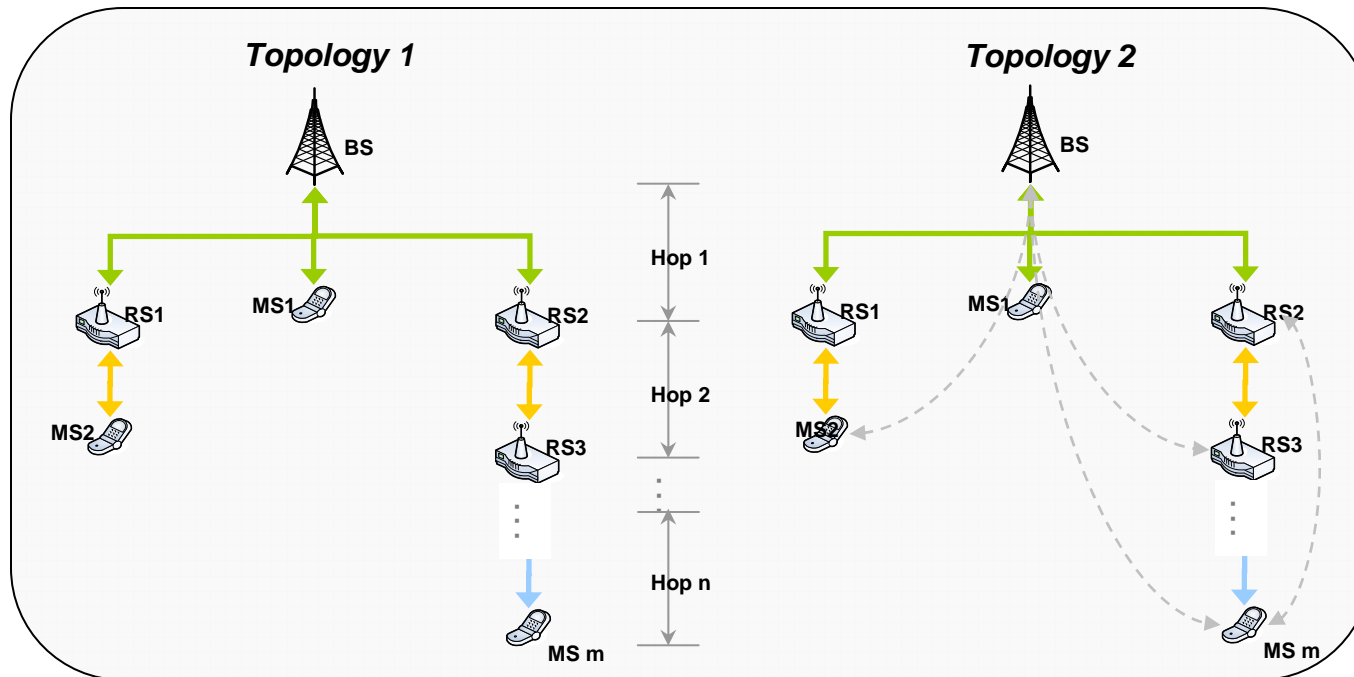

- The extended/enhanced frame structure should support following features
 - Support various network topologies
 - *Backward compatibility* with legacy MSs/SSs
 - *Flexibility* and *extensibility*
 - *Simplicity* and *efficiency*


Backward-Compatibility

- The frame structure information is broadcast by MMR-BS and RS to the RS and MSs associated with it.
- The notion of downlink (DL) and uplink (UL) subframe are still preserved, so that the legacy MSs/SSs can still operate properly.
- The format of *preamble* and key management messages (e.g., *FCH*, *DL-MAP*, *DCD*, *UL-MAP*, *UCD*) should be understood by the legacy MSs/SSs.

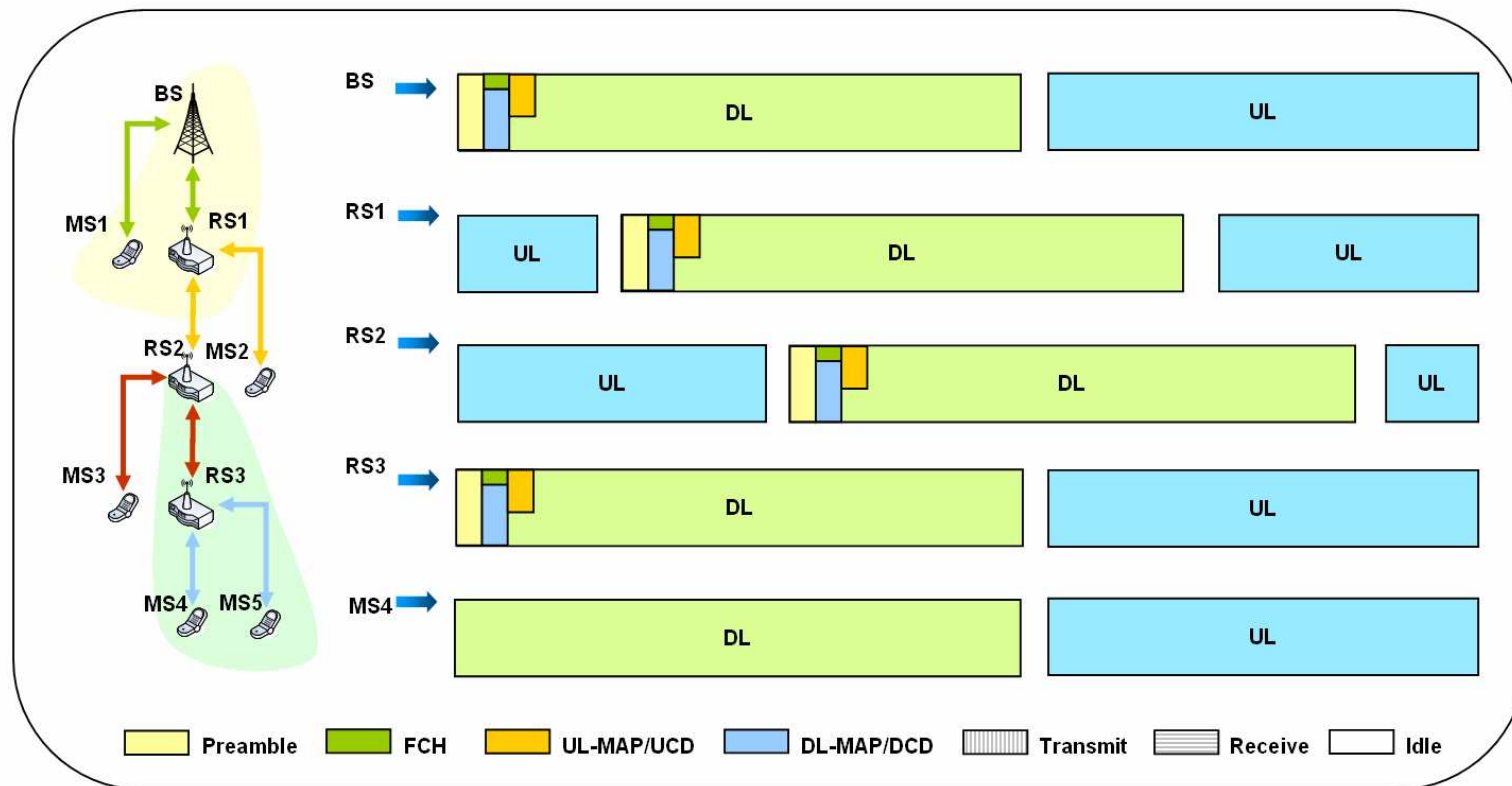

Flexibility & Extensibility


- BS and RS partition the DL and UL subframe into multiple intervals (e.g., zones) to accommodate various communication needs arising from a vast variety of network topologies and traffic conditions, and deployment scenarios.
 - From a BS or RS perspective, it can transmit, receive or stay idle during a DL and an UL subframe.
 - The conventional concept of DL and UL have been relaxed.
 - This extended notion of DL and UL is kept transparent to the legacy MSs/SSs.
 - The actual resource allocation is handled by implementation-dependent scheduling algorithm, which can assume either *centralized* or *distributed* nature.

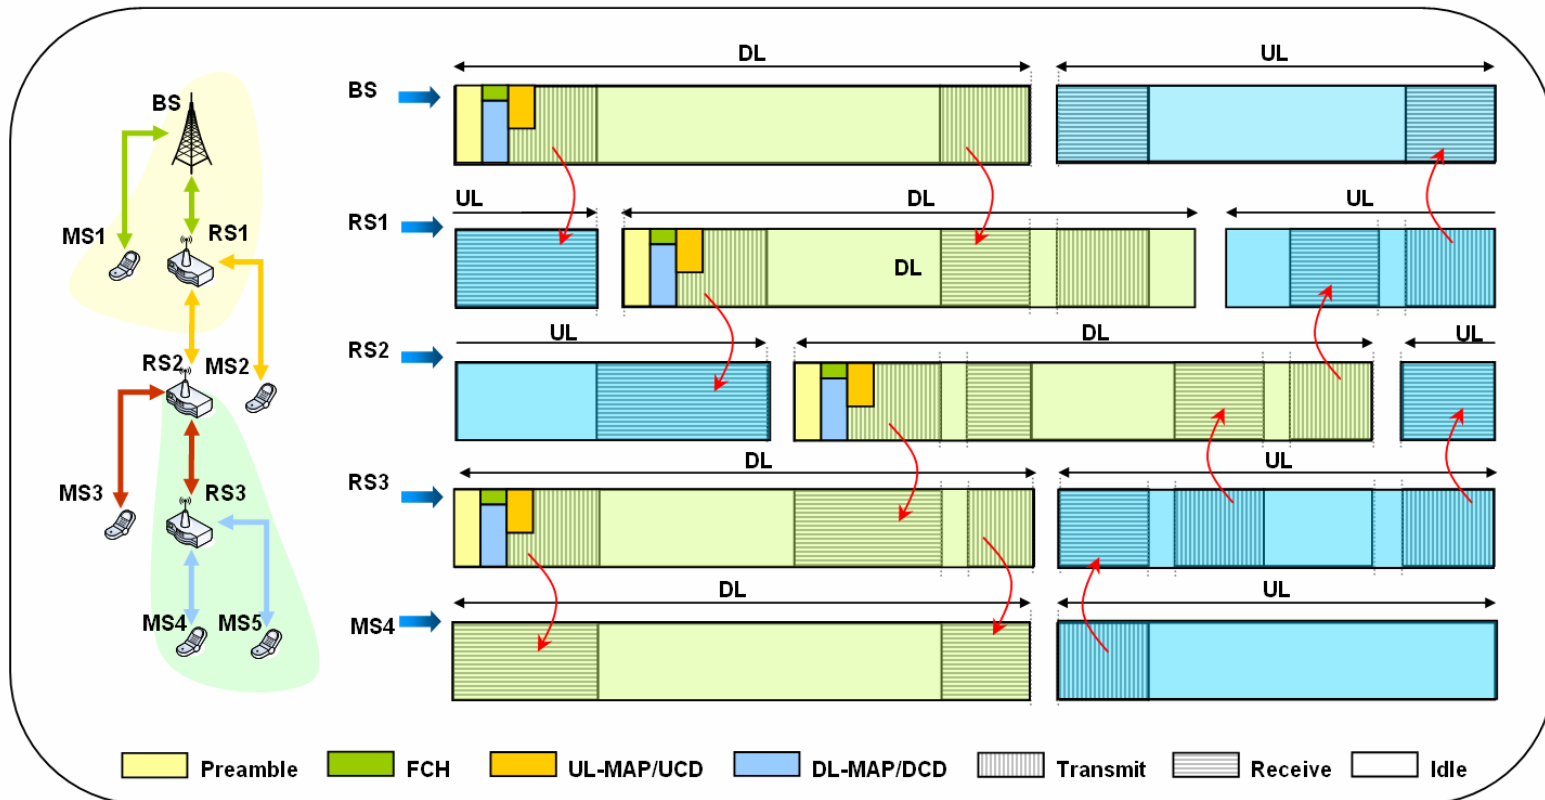

Simplicity


- BS and RS indicate to the associated RSs the change of intervals and probably the detailed schedule within such intervals.
 - Only a few new information elements and TLVs are needed.

	Function	Extension/Enhancement Involved
DL	Switch to RX	Extend DL_zone_switch_IE, based on extended-2 IE format.
	Switch back from RX	Extend DL_zone_switch_IE, based on extended-2 IE format.
	Detailed schedule within RX interval/zone during logical DL subframe	Introduce DL_RX_MAP_IE, based upon the content of UL_MAP_IE and extended-2 IE format.
	Channel description	Extend TLVs in DCD to describe UL channel.
UL	Switch to TX	Extend UL_zone_switch_IE, based on extended-2 IE format.
	Switch back from TX	Extend UL_zone_switch_IE, based on extended-2 IE format.
	Detailed schedule within TX interval/zone during logical UL subframe	Introduce UL_TX_MAP_IE, based upon the content of DL_MAP_IE content and extended-2 IE.
	Channel description	Extend TLVs in UCD to describe DL channel.

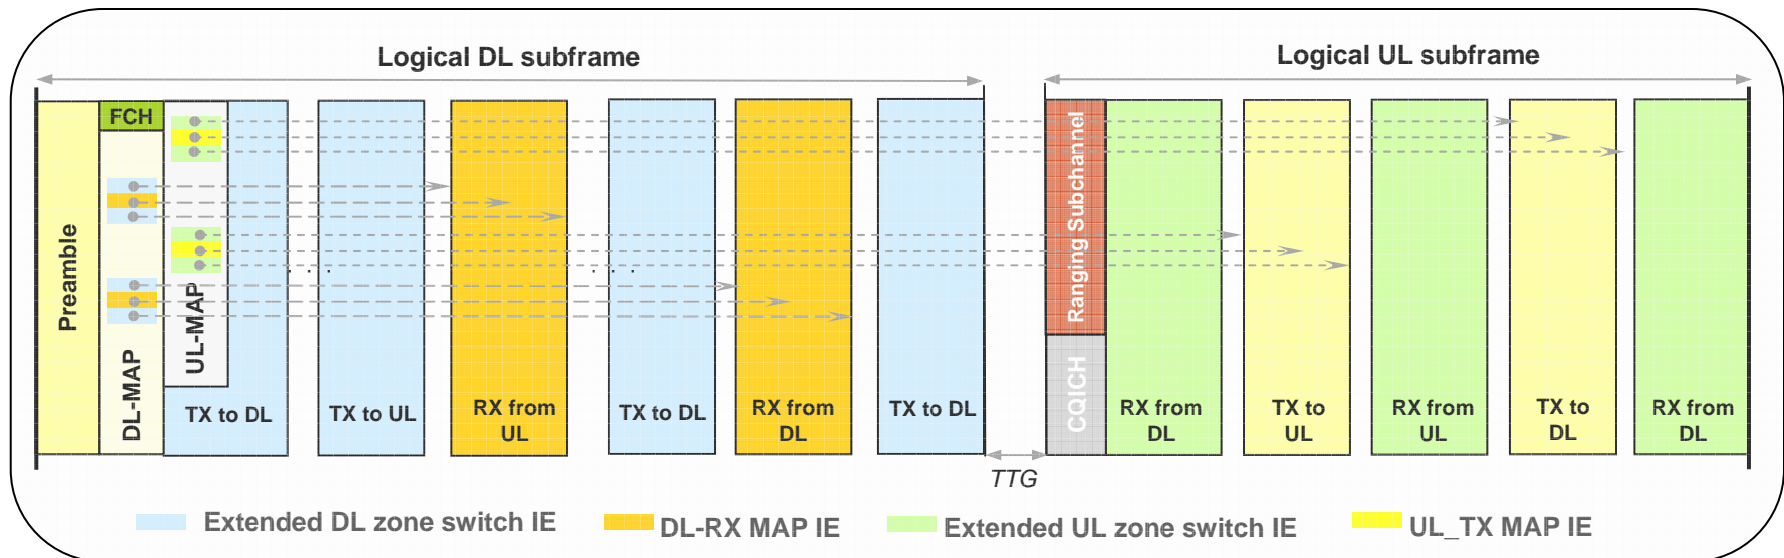

Efficiency

- Frequency/spatial reuse
 - To avoid potential interference, BS and RS may need to announce idle periods in logical DL or UL subframe.
 - Given a large enough distance, same subchannels can be reused again.
- RTG and TTG can be inserted on a needy basis.
- In capacity improvement scenario, some RSs may not need to transmit MAP messages.
 - Preamble from these RSs may still be needed.
 - The preamble from BS or upstream RSs may not be used by MSs/SSs to estimate the channel, as that preamble traverses through a different channel.

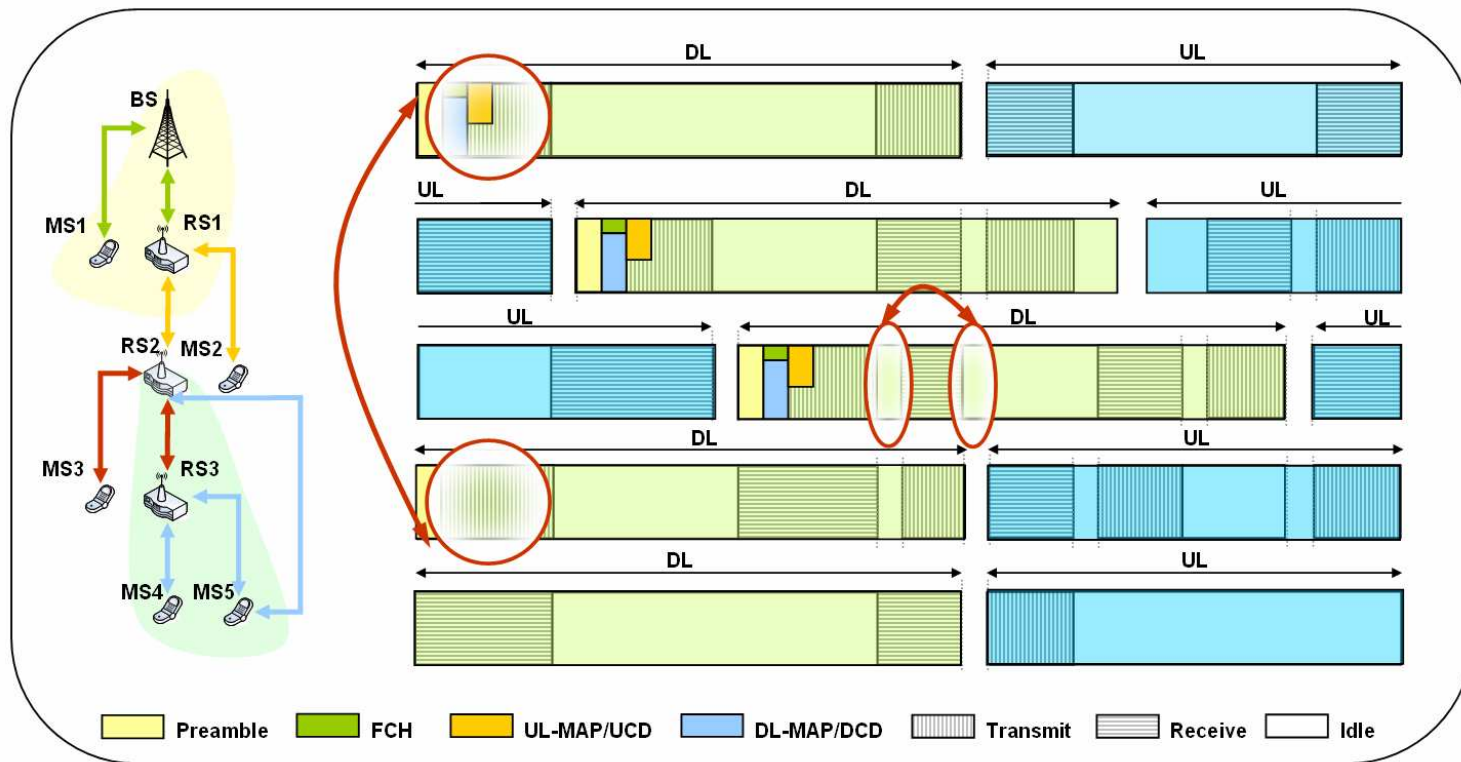

Summary

- The logical downlink and uplink subframe structure is further partitioned into intervals/zones.
- The starting and end time of these intervals/zones can be indicated by extended DL_Zone_Switch_IE and UL_Zone_Switch_IE.
- The detailed schedule of these interval/zones can be indicated by DL_RX_MAP_IE and UL_TX_MAP_IE
 - Extension of DL_MAP_IE and UL_MAP_IE
 - Assume the format of extended-2 IE format.
- The minor revisions/extensions of the zone concept, and the information elements described above enable the frame structure to support wide variety of communication needs and network topology/scenarios.