

Rate-Compatibility and Incremental Redundancy HARQ for 802.16j LDPC codes

IEEE 802.16 Presentation Submission Template (Rev. 8.3)

Document Number: IEEE S802.16 j -07/196

Date Submitted: 2007-03-5

Source:

Wataru Matsumoto, Toshiyuki Kuze, Rui Sakai, Koon Hoo Teo
Mitsubishi Electric Corp.
5-1-1 Ofuna Kamakura, Kanagawa 2478501, JAPAN

Voice: +81-467-41-2074

Fax: +81-467-41-2136

Email: Matsumoto.Wataru@aj.MitsubishiElectric.co.jp

Voice: +86-755-26773000-6574

Fax: +86-755-26773000-6615

Email: xu.jun2@zte.com.cn

Jun Xu

ZTE Corporation

3/F, Bldg,711,Pengli Industrial Park,
Liantang, Shenzhen, 518004, R.P.China

Voice: 886-3-5712121

Fax:: 886-3-5710116

Email: IKFu@itri.org.tw

I-Kang Fu

National Chiao Tung University (NCTU)

/Industrial Technology Research Institute (ITRI)

ED922, 1001 Ta Hsueh Rd.,

Hsinchu City, Taiwan 300, ROC

Venue:

IEEE 802.16 Session #48, Orland , USA

Base Document: None

Purpose:

Propose a Rate-Compatible and IR HARQ for 802.16j to improve reliability and throughput performance on relay links.

Notice:

This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

IEEE 802.16 Patent Policy:

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://iee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://iee802.org/16/ipr/patents/notices>>.

Rate-Compatibility and Incremental Redundancy HARQ for 802.16j LDPC codes

Authors:


Wataru Matsumoto, Toshiyuki Kuze, Rui Sakai, Koon Hoo Teo
Mitsubishi Electric Corporation

Jun Xu
ZTE Corporation

I-Kang Fu
Industrial Technology Research Institute (ITRI)

Concept of Enhanced Hybrid ARQ (Rate Compatible LDPC)

- The concept of “Enhanced Hybrid ARQ” is to provide **Low cost**, **Reliability** and **Scalability**.

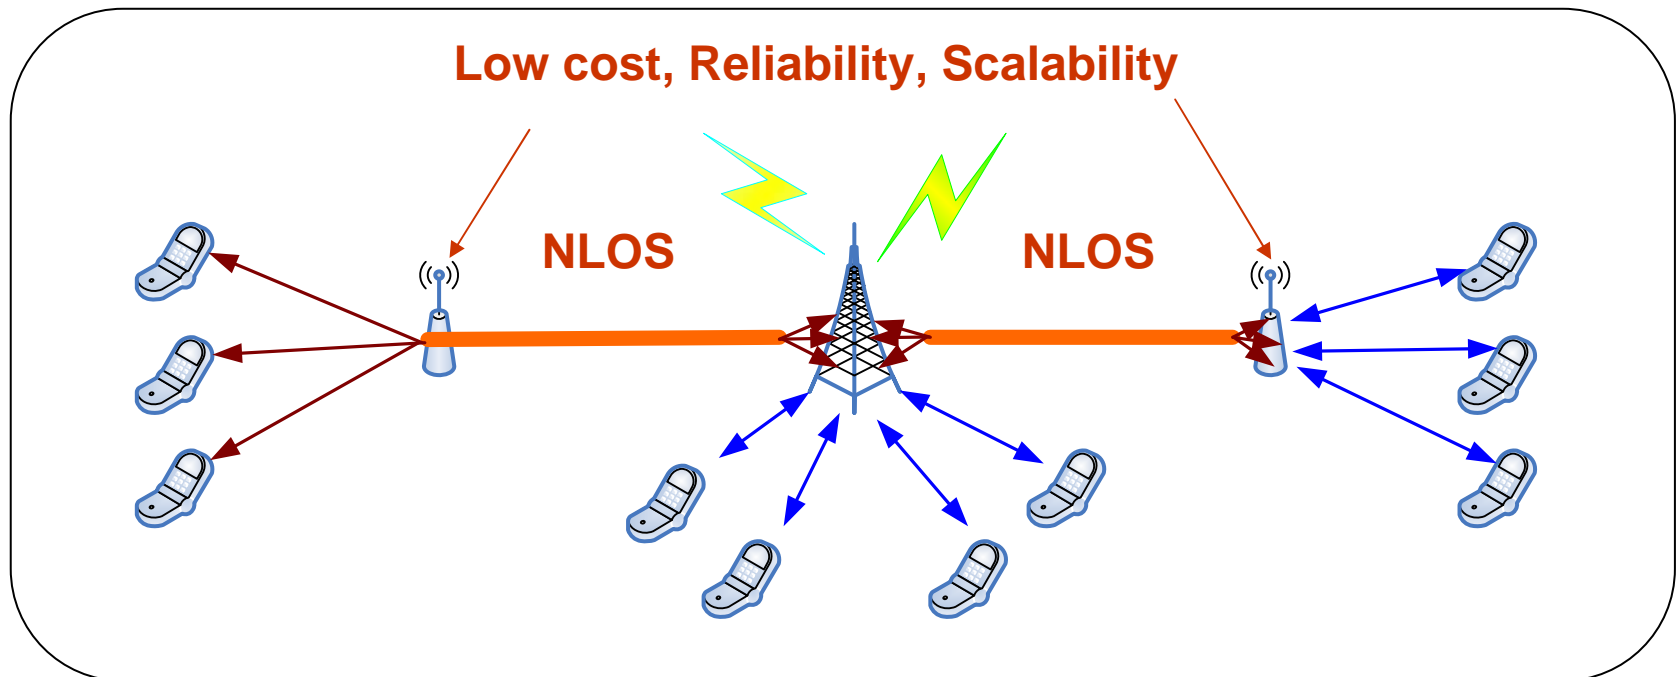

Motivation –Requested issues

- LDPC codes can provide lower cost hardware than CTC.
- High reliability on low data-rate region. → Expansion of coverage area.
- Coexistence of the proposed RC-LDPC codes and the current 802.16e LDPC codes.
 - Minimize of additional circuits for RC-LDPC codes.
- Shorter latency compared to CTC HARQ.
- Extend the code-length to 14400 bits from the current 2304 bits to improve the HARQ efficiency.

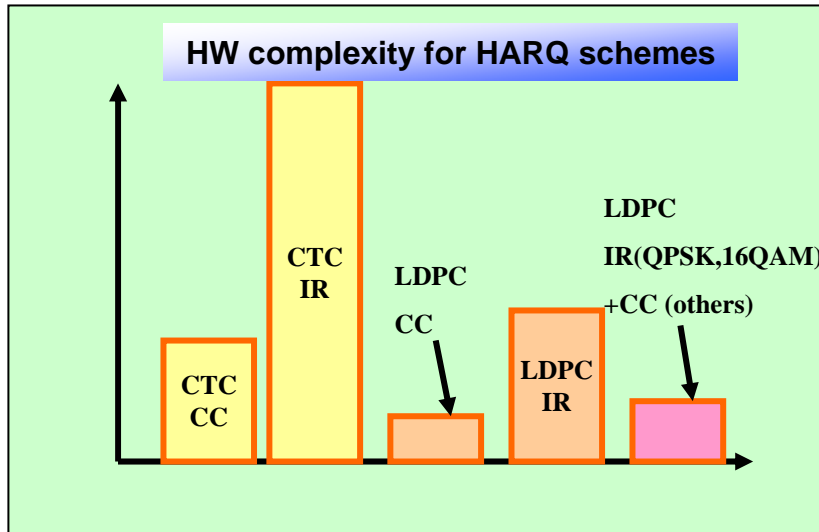


Fig1. Low Cost

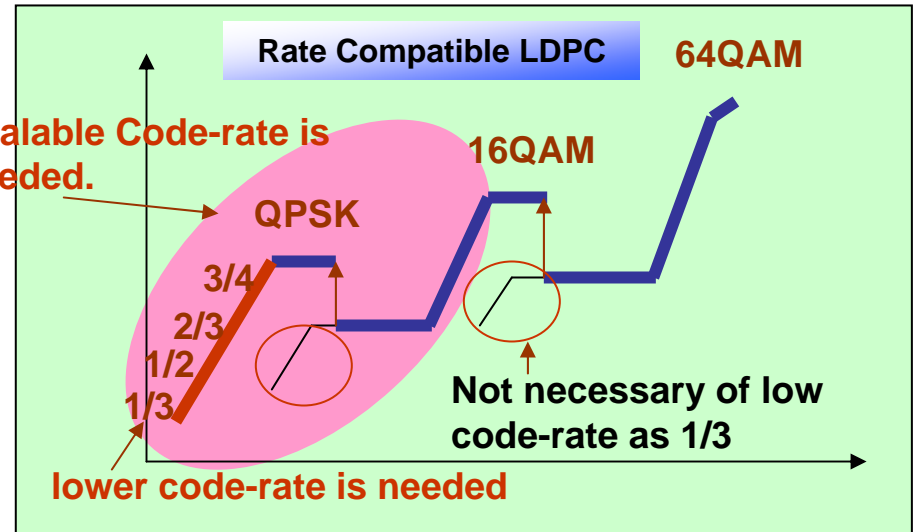


Fig2. Reliability and Scalability



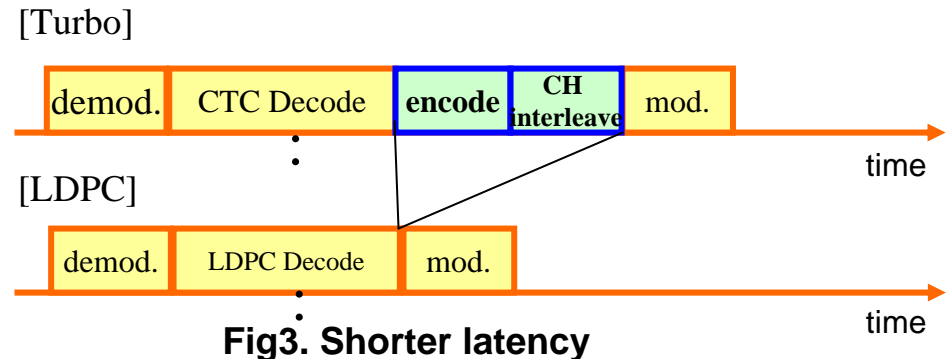


Fig3. Shorter latency

Efficiency Performance of LDPC codes on MCS

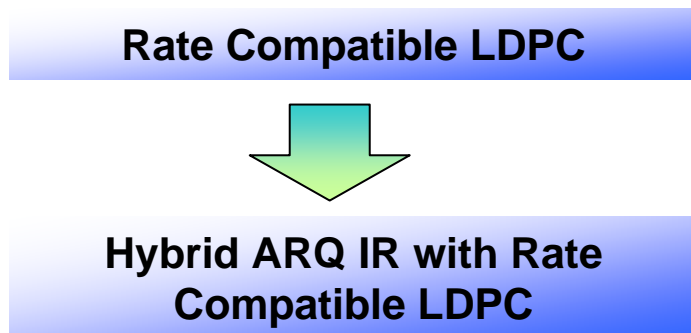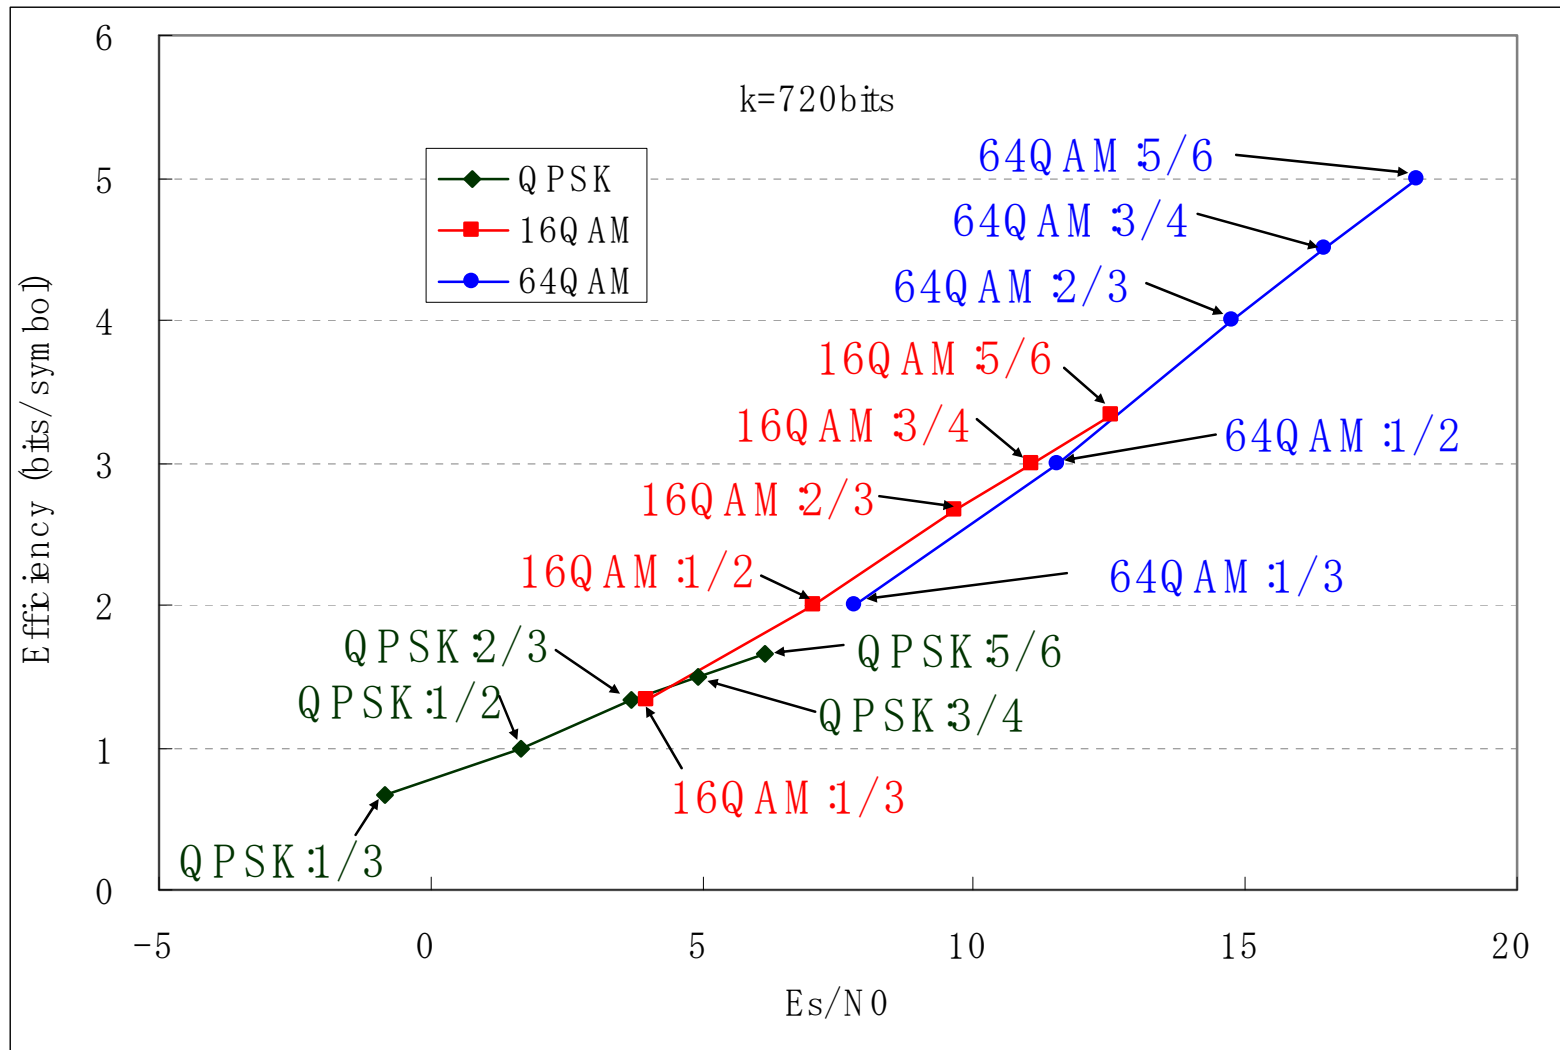


Latency benefit of LDPC codes

➤ In the case of LDPC codes for Relay station


LDPC decoder output LLRs for the whole codeword.

But CTC decoder only output those for the information bits, so CTC have to re-encode to do channel interleaving before modulation.

[Turbo]

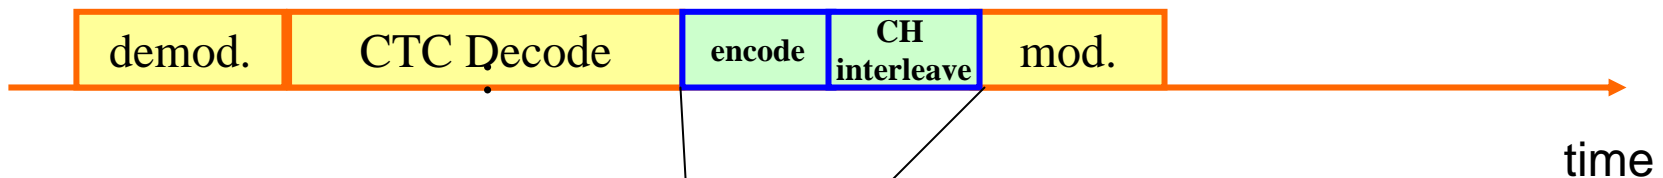

[LDPC]

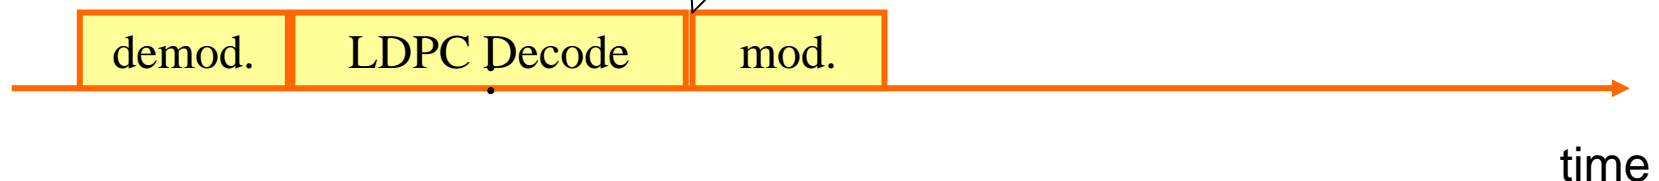

Relay station with LDPC can relay the signal with lower latency.

Conclusions

- LDPC support high throughput with lower hardware complexity and cost compared to Turbo codes
- Shorter latency compared to CTC
 - No re-encoding and channel interleaving are required.
- RC-LDPC is an enhanced version of the 802.16e LDPC
 - 802.16e LDPC will be used as a baseline
 - RC-LDPC is rate compatible
 - Backward compatible to 802.16e LDPC
 - 802.16e LDPC with CC HARQ provides support for higher throughput link
- RC-LDPC provide improved robustness for channel in hostile conditions with
 - Low code rate such as 1/3 code rate
 - Incremental Redundancy for HARQ

Comparison with Turbo

Table. Operations count comparison of sub-optimal decoders LDPC and CTC decoders.

	LDPC	CTC	Complexity of LDPC / Complexity of CTC
Algorithm	LBP Min- Sum+Offset	Max Log Map +extrinsic scaling	
Number of Iterations	20	8	
Total cost (R=1/2)	28.8K x 20 = 576K	171K x 8 x 2 = 2736K	21%
Total cost (R=3/4)	20.6K x 20 = 412K	171K x 8 x 2 = 2736K	15%

Reference: R1-060874, " **Complexity Comparison of LDPC Codes and Turbo Codes** "

3GPP TSG RAN WG1#44bis, Athens, Greece 27-31 Mar. 2006.

Rate-Compatible LDPC codes

IR with Mother Rate=1/3 parity check matrix

Rate > 1/2



Rate = 1/2



Rate < 1/2




• In addition to puncturing, extended parity matrixes are used to achieve flexible coding rate and rate compatibility

• 802.16e LDPC will be used as the baseline for enhancement of the RC-LDPC

-1 94 73 -1 -1 -1 -1 -1 55 83 -1 -1	7 0 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 27 -1 -1 -1 22 79 9 -1 -1 -1 12	-1 0 0 -1 -1 -1 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 -1 24 22 81 -1 33 -1 -1 -1 0	-1 -1 0 0 -1 -1 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
61 -1 47 -1 -1 -1 -1 -1 65 25 -1 -1	-1 -1 -1 0 0 -1 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 39 -1 -1 -1 84 -1 -1 41 72 -1	-1 -1 -1 -1 0 0 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 -1 -1 4 0 -1 82 -1 -1 -1 79	0 -1 -1 -1 -1 0 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 0 -1 -1 -1 -1 -1
-1 -1 95 53 -1 -1 -1 -1 -1 14 18 -1	-1 -1 -1 -1 -1 -1 -1 0 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 11 73 -1 -1 -1 2 -1 -1 47 -1 -1	-1 -1 -1 -1 -1 -1 -1 0 0 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
12 -1 -1 -1 83 24 -1 43 -1 -1 -1 51	-1 -1 -1 -1 -1 -1 -1 0 0 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 -1 -1 -1 94 -1 59 -1 -1 70 72	-1 -1 -1 -1 -1 -1 -1 -1 0 0 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 7 65 -1 -1 -1 -1 39 49 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 0 0 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
43 -1 -1 -1 -1 66 -1 41 -1 -1 -1 26	7 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 0	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 -1 -1 -1 17 -1 9 -1 -1 -1 20	0 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	0 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 36 -1 -1 -1 -1 -1 -1 -1 7 -1 -1	-1 0 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	-1 0 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 5 -1 -1 -1 -1 -1 -1 -1 5 -1 -1	-1 -1 0 -1 -1 -1 -1 -1 -1 -1 -1 -1	-1 -1 0 -1 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 -1 -1 -1 23 -1 11 -1 -1 -1 23	-1 -1 -1 0 -1 -1 -1 -1 -1 -1 -1 -1	-1 -1 -1 0 -1 -1 -1 -1 -1 -1 -1 -1
-1 -1 -1 -1 -1 5 -1 32 -1 -1 -1 38	-1 -1 -1 -1 0 -1 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 0 -1 -1 -1 -1 -1 -1 -1
-1 -1 7 -1 -1 -1 -1 -1 19 -1 -1 -1	-1 -1 -1 -1 -1 1 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 0 1 -1 -1 -1 -1 -1
-1 -1 -1 -1 -1 31 -1 23 -1 -1 -1 48	-1 -1 -1 -1 -1 0 -1 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 1 1 -1 -1 -1 -1 -1
-1 -1 -1 -1 -1 29 -1 37 -1 -1 -1 7	-1 -1 -1 -1 -1 -1 0 -1 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 0 -1 -1 -1 -1 -1
-1 -1 6 -1 -1 -1 -1 -1 -1 3 -1 -1	-1 -1 -1 -1 -1 -1 -1 0 -1 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 0 -1 -1 -1 -1
-1 -1 1 -1 -1 -1 -1 -1 2 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 0 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 0 -1 -1 -1
-1 -1 -1 -1 -1 37 -1 26 -1 -1 -1 8	-1 -1 -1 -1 -1 -1 -1 -1 -1 0 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 0 -1 -1
-1 -1 3 -1 -1 -1 -1 -1 6 -1 -1 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 0 -1	-1 -1 -1 -1 -1 -1 -1 -1 -1 -1 0 -1

Performance of RC LDPC


Performance for RC LDPC codes based on the 16e LDPC codes

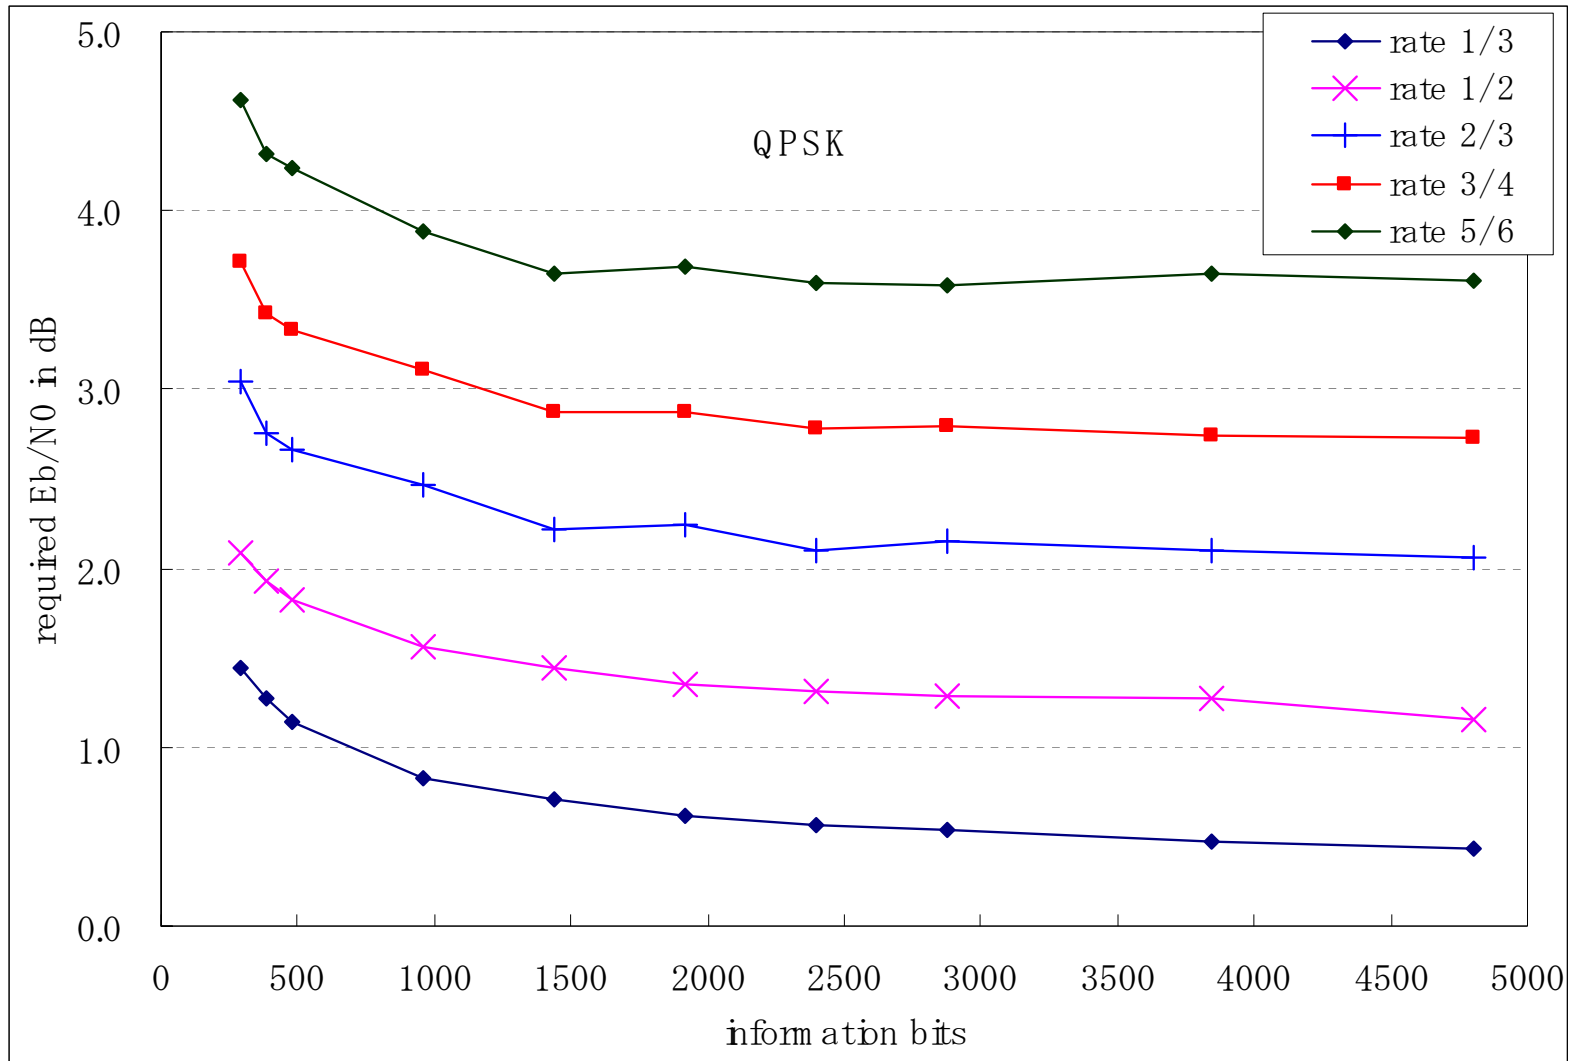

Performance of RC LDPC


Performance for RC LDPC codes based on the 16e LDPC codes

Chase Combining / OPTMAL

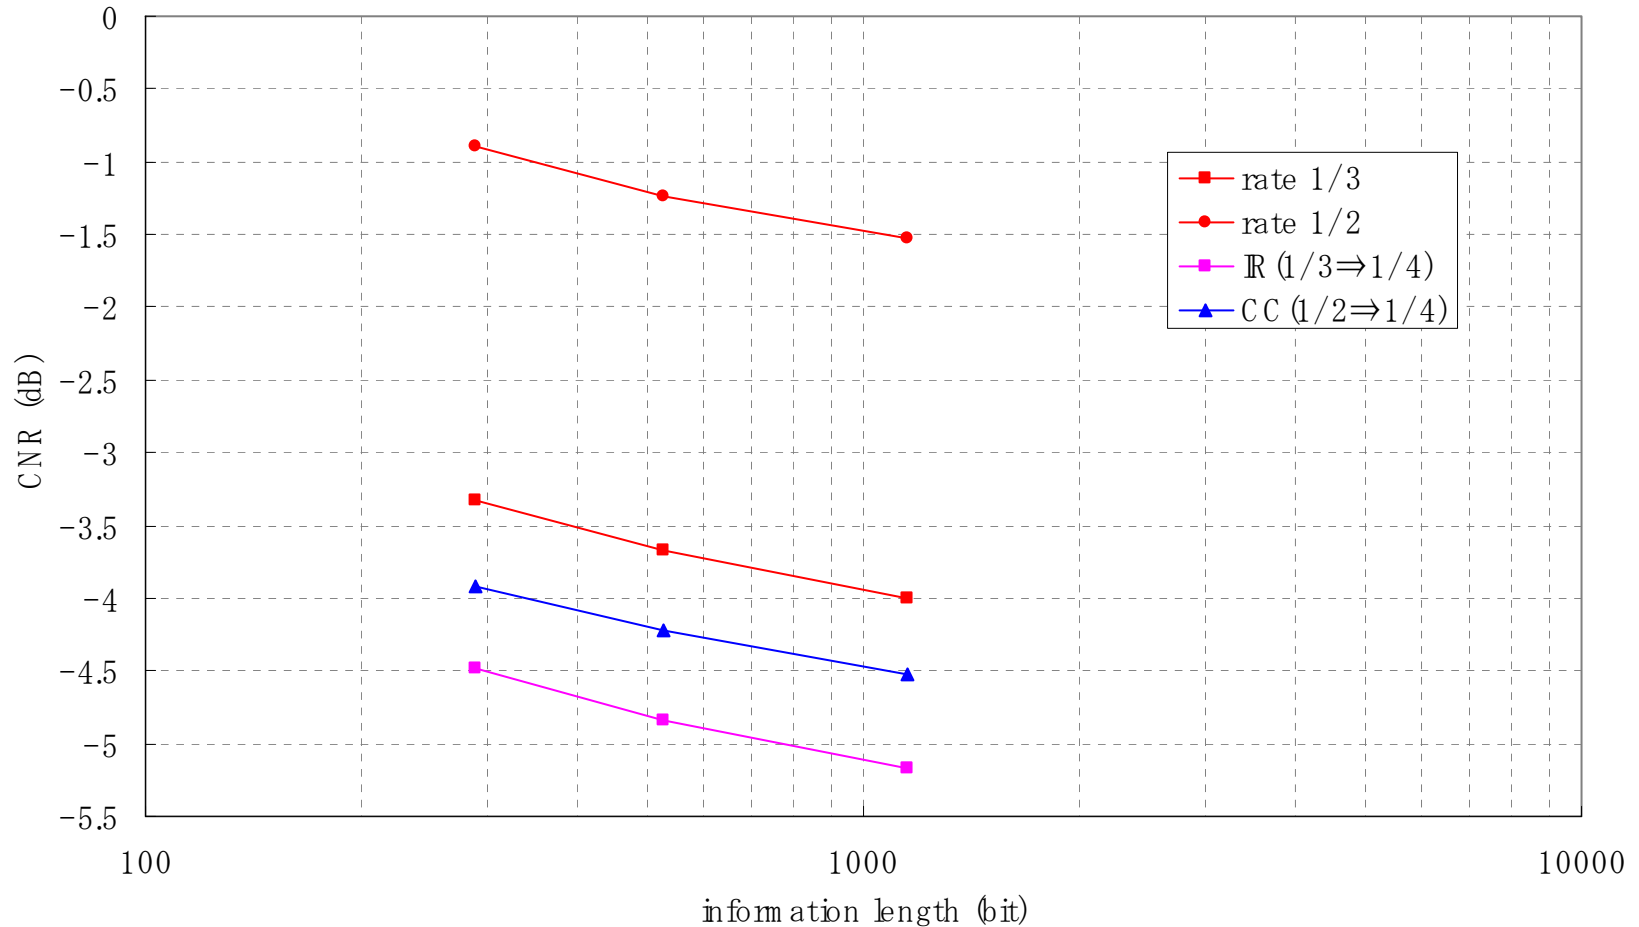


Throughput Performance of LDPC Chase Combining and IR HARQ

Required SNR for BLER= 10^{-2}

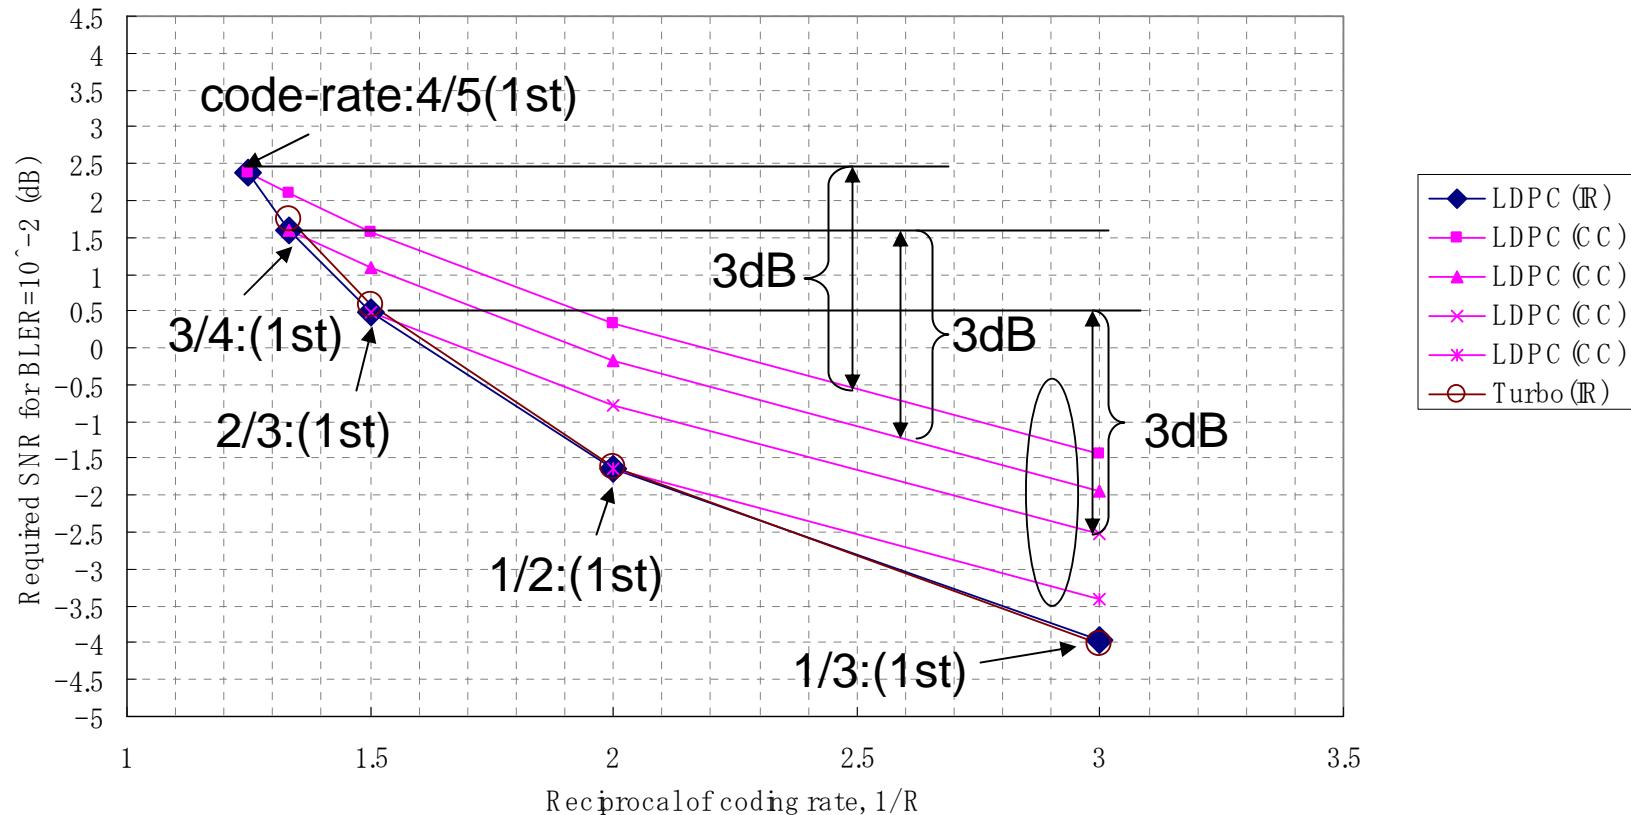


RC-LDPC and 802.16e LDPC

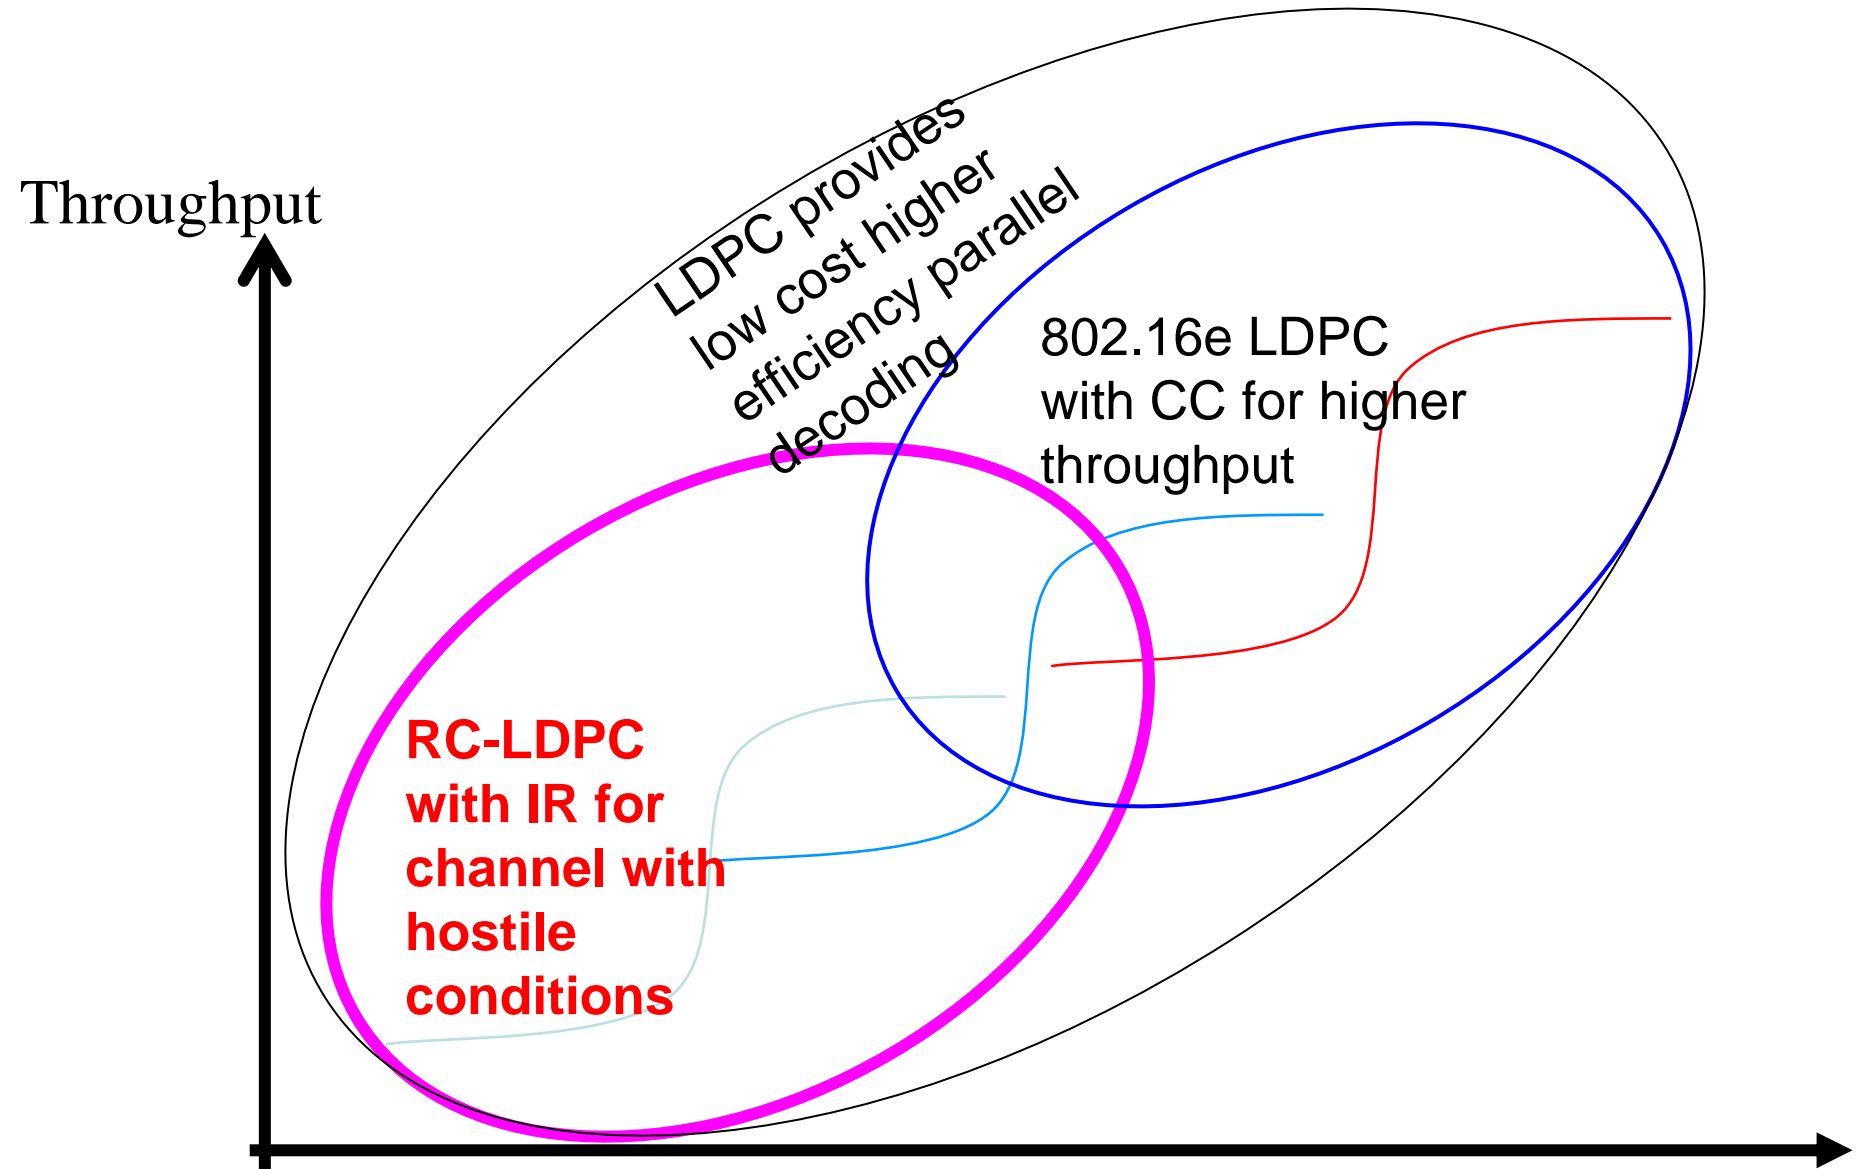

Merits of RC-LDPC and 802.16e LDPC

Improved robustness provided by RC-LDPC low code rate and HARQ IR especially for channels with hostile conditions

Our Typical Model

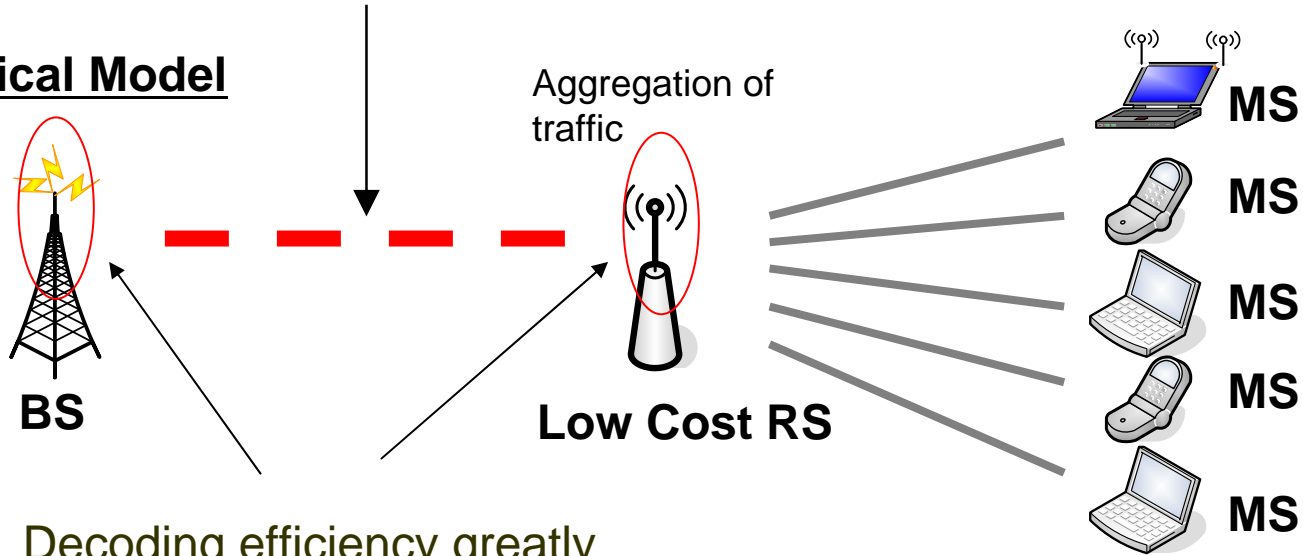

Decoding efficiency greatly improved by LDPC and making high throughput and low cost RS/BS possible for UL and DL