

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	STC sub-packet combining for 3 transmit antennas in OFDMA	
Date Submitted	2004-11-12	
Source(s)	Yongseok Jin, Jinyoung Chun, Kyuhyuk Chung LG Electronics, Inc. 533, Hogye-1dong, Dongan-gu, Anyang-shi, Kyongki-do, Korea	Voice: 82-31-450-7187 Fax: 82-31-450-7912 [mailto: { jayjay, jychun03, kyuhyuk }@lge.com]
Re:	This is a response to a Call for Comments on IEEE P802.16e-D5	
Abstract	STC sub-packet combining scheme can be applied to 3 transmit antenna in OFDMA	
Purpose	This document is submitted for review by 802.16e Working Group members	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

STC sub-packet combining for 3 transmit antennas in OFDMA

Yongseok Jin, Jinyoung Chun and Kyuhyuk Chung
LG Electronics

1. Introduction

In OFDMA of the current 802.16e standard, In order to enhance H-ARQ performance use spatial diversity through proper arrangement of the re-transmission packet. So STC sub-packet retransmission schemes for 2 and 4-antenna are supported in section '8.4.8.9 STC sub-packet combining'. We propose to add a STC sub-packet retransmission scheme for 3-antenna.

2. Soft packet combing for 3-antennas

If the packet was failed to decode at receiver, then a re-transmission is requested. In the MIMO mode transmission, MIMO packet combing can use spatial diversity of the MIMO channel, the MIMO packet combining can reduce the re-transmission number and reduce the packet re-transmission.

Retransmission scheme is as follows:

	initial transmission	odd re-transmission	even re-transmission
Space time code incremental redundancy for matrix C	$s^{(0)} = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \end{bmatrix}$	$s^{(odd)} = \begin{bmatrix} -s_2^* \\ s_1^* \\ s_3^* \end{bmatrix}$	$s^{(even)} = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \end{bmatrix}$

The first transmit MIMO packet is $\begin{bmatrix} s_1 \\ s_2 \\ s_3 \end{bmatrix}$ in 3-antennas BS, if the packet is error, the re-transmission of the same packet is

send in the form of $\begin{bmatrix} -s_2^* \\ s_1^* \\ s_3^* \end{bmatrix}$ then, such a re-transmission have the SNR gain since the first and second transmission have the space time block coding form.

3. Simulation results

In the simulation, we used band AMC mode, convolutional code 1/2 and QPSK and zero-forcing decoder was used. Retransmission delay is 5ms (1 frame delay).

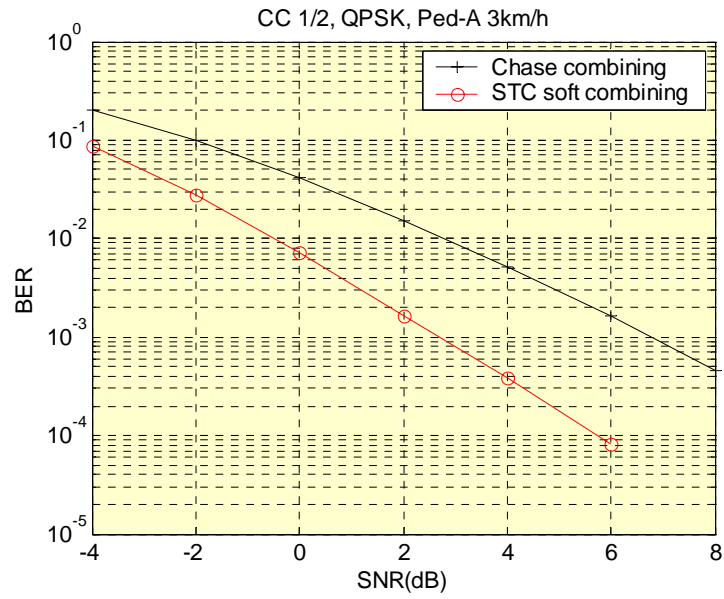


Figure 1. Performance for soft MIMO packet combining at 3km

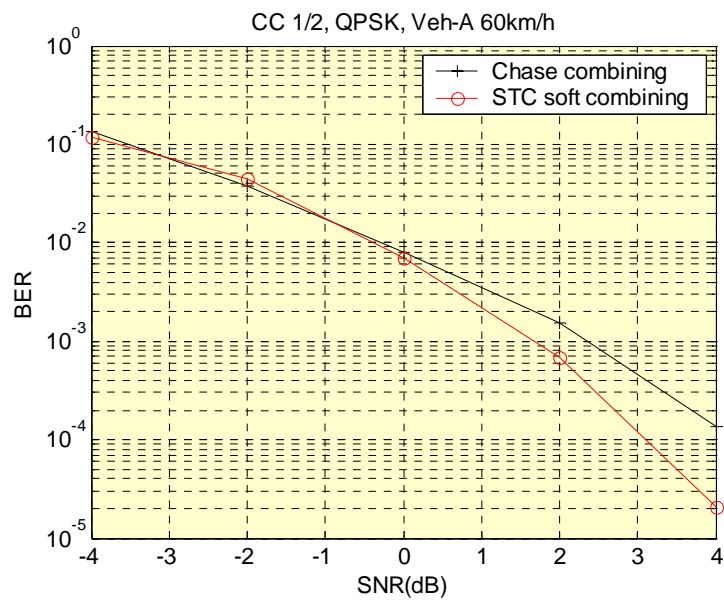


Figure 2. Performance for soft MIMO packet combining at 60Km

4. Proposed Text Change

[Modify the section '8.4.8.9 STC sub-packet combining' in p.259]

8.4.8.9 STC sub-packet combining

In the STC transmission, for both downlink and uplink, the STC sub-packet re-transmission can be generated by using the Space-time code incremental redundancy version. The transmission rule for space-time coded incremental redundancy codes set is listed in Table 314l, Table 314m and Table 314nn.

Table 314l STC subpacket combining (2-transmit antenna case)

	initial transmission	odd re-transmission	even re-transmission
Space time code incremental redundancy for matrix B	$s_2^{(0)} = \begin{bmatrix} s_1 \\ s_2 \end{bmatrix}$	$s_2^{(odd)} = \begin{bmatrix} -s_2^* \\ s_1^* \end{bmatrix}$	$s_2^{(even)} = \begin{bmatrix} s_1 \\ s_2 \end{bmatrix}$

Table 314m STC subpacket combining (3-transmit antenna case)

	initial transmission	odd re-transmission	even re-transmission
Space time code incremental redundancy for matrix C	$s_2^{(0)} = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \end{bmatrix}$	$s_2^{(odd)} = \begin{bmatrix} -s_2^* \\ s_1^* \\ s_3^* \end{bmatrix}$	$s_2^{(even)} = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \end{bmatrix}$

Table 314nn STC subpacket combining (4-transmit antenna case)

	initial transmission	odd re-transmission	even re-transmission
Space time code incremental redundancy for matrix C	$s_2^{(0)} = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \\ s_4 \end{bmatrix}$	$s_2^{(odd)} = \begin{bmatrix} -s_2^* \\ s_1^* \\ -s_4^* \\ s_3^* \end{bmatrix}$	$s_2^{(even)} = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \\ s_4 \end{bmatrix}$

The MSS shall process the initial transmission, 1st re-transmission and 2nd re-transmission etc in the form of space time decoding. The re-transmission of FEC code word shall use the Chase combining re-transmission.