

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	New 802.16e Privacy Capability
Date Submitted	2005-01-27
Source(s)	Mo-Han Fong, Bill Gage, Haixiang He mailto:mhfong@nortel.com
Re:	IEEE 802.16e Privacy Sublayer
Abstract	Define a new privacy capability to enable rapid MAC signalling in a mobile environment, to reduce overhead and to support multiple network architectures. With this new capability, MAC subheaders are not encrypted and encryption is performed on a MAC SDU rather than on a MAC PDU.
Purpose	Review and adopt the suggested additions into P802.16e/D6.
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

§

1 Problem Statement

Figure 24 of [1] “Construction of a MAC PDU” indicates that encryption is the last operation performed before addition of the Generic MAC Header to a frame. As a consequence, all of the optional MAC PDU subheaders (grant management, fragmentation control, fast feedback, mode selection feedback) and the packing SDU subheaders are deemed to be part of the MAC PDU payload and are encrypted if security is enabled on a transport CID¹. This is illustrated in [Figure 1](#).

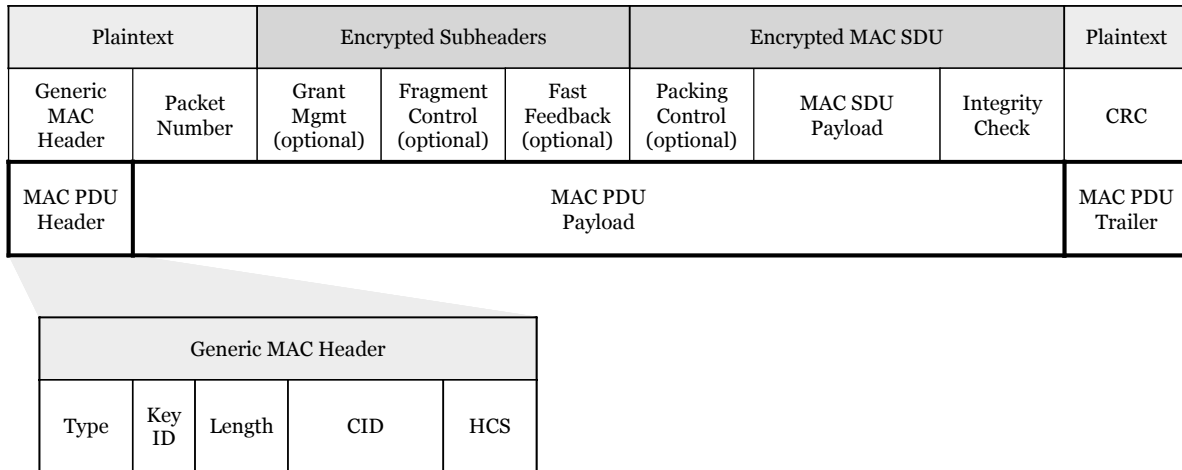


Figure 1 : Encrypted MAC Frame in [1]

The impacts of this encryption policy include:

- *Increased delays in MAC layer scheduling.* Processing of grant and fast feedback subheaders must occur after decryption of the MAC PDU. The delay incurred in encrypting the frame at the transmitter and decrypting the frame at the receiver negatively impacts the responsiveness of the system.
- *Increased delays for ARQ-enabled connections.* Processing of fragmentation subheaders must occur after decryption of the MAC PDU. The delay incurred in decrypting the frame at the receiver negatively impacts the responsiveness of the system.
- *Increased overhead for fragmented packets.* Each fragment is encrypted separately and has its own packet number and integrity check value (ICV) added to the fragment.
- *Increased processing requirements in the BS.* Encryption/decryption functions require significant computing resources. As a result, these functions are often implemented using specialised hardware encryption accelerators.
- *Increased system cost.* The current encryption policy forces the encryption/decryption functions to be incorporated into every BS and precludes alternate network architectures aimed at reducing the cost of implementing these functions.

¹ IEEE 802.16 management frames are never encrypted.

2 Proposed Solution

This contribution provides an alternate solution for the Privacy Sublayer in IEEE 802.16e to ensure that all MAC subheaders are transmitted as plaintext. In particular, this proposal defines a new capability that indicates encryption is to be applied on a per-SDU basis rather than on a per-PDU basis. The ability to support this capability is signalled through a new TLV included in REG-REQ/RSP messages. ~~The privacy method used in a frame is signalled through a new flag in the Generic MAC Header.~~ The selected privacy method is then used with all encrypted MAC frames transmitted and received by the MSS during the lifetime of its association with the network.

This new capability results in the following changes with respect to the Security Sublayer defined in [1]:

- The transmitter in [1] encrypts each MAC PDU and its subheaders; the transmitter using this new capability encrypts at the MAC SDU level and leaves all subheaders as plaintext.
- The transmitter in [1] performs fragmentation and then applies encryption, adding an ICV and packet number to each of the resulting MAC PDUs; the transmitter using this new capability encrypts the MAC SDU and then performs fragmentation on the resulting encrypted SDU.
- The receiver in [1] decrypts each MAC PDU (SDU fragment) and then reconstructs the original SDU; the receiver using this new capability reconstructs the encrypted MAC SDU from the received fragments and then performs decryption of the entire SDU.
- [1] includes volatile information from the Generic MAC Header (i.e. the Type flags) and from the subheaders in the initialisation vector; this proposal includes only non-volatile information associated with the connection in its initialisation vector.

3 References

- [1] IEEE Standard 802.16-REVd (2004 Edition), “Local and Metropolitan Area Networks: Air Interface for Fixed Broadband Wireless Access Systems”.
- [2] IEEE Proposed Standard 802.16e/D5 (September 2004), “Local and Metropolitan Area Networks: Air Interface for Fixed Broadband Wireless Access Systems (Draft Amendment Combined Fixed and Mobile Operation in Licensed Bands)”.

<u>Byte within CTR(i)</u>	<u>0</u>	<u>1</u>	<u>4</u>	<u>5</u>	<u>6</u>	<u>7</u>	<u>9</u>	<u>10</u>	<u>13</u>	<u>14</u>	<u>15</u>
<u>Bytes</u>	<u>1</u>	<u>4</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>2</u>					
<u>Field</u>	<u>Flag</u>	<u>SFID</u>	<u>SAID</u>	<u>reserved</u>			<u>PN</u>	<u>C</u>			
<u>Contents</u>	<u>0x01</u>	<u>SFID associated with connection</u>	<u>SAID associated with connection</u>	<u>0x000000</u>			<u>Packet number associated with SDU</u>	<u>Length of data part, not including padding</u>			

Figure 137a – Construction of A₃ (PM = 1)

[2] 11.7 REG-REQ/RSP management message encodings

[Insert the following text to the end of Section 11.7:]

11.7.x Privacy Mode encodings

This field indicates which privacy mode the MSS will use – encryption of MAC subheaders and PDU payload or encryption of SDU only.

<u>Type</u>	<u>Length</u>	<u>Value</u>	<u>Scope</u>
<u>TBD</u>	<u>1</u>	<u>0 = encryption of MAC subheaders and PDU payload.</u> (PM=0 in GMH) <u>1 = [default] encryption of SDU only.</u> (PM=1 in GMH)	<u>REG-REQ</u> <u>REG-RSP</u>

[End of Document]