

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Clarification of MAC Extended Subheader	
Date Submitted	2005-04-27	
Source(s)	Yongseok Jin, Bin-Chul Ihm, and Jinyoung Chun LG Electronics. Inc.	Voice: 82-31-450-7187 Fax: 82-31-450-7129 jayjay@lge.com
Re:	This is a contribution to IEEE 802.16e.	
Abstract	C802.16e-05/163r3 and C802.16e-05/95r3 related to extended subheader were also accepted. However, the content of these contributions wasn't reflected	
Purpose	This contribution proposes to clarify new extended subheaders which were not incorporated into D7 and rearrange section number.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Clarification of MAC Extended Subheader

Yongseok Jin, Bin-Chul Ihm, and Jin young Chun
LG Electronics Inc.

Introduction

C802.16e-05/163r3 and C802.16e-05/95r3 related to extended subheader were also accepted. However, the content of these contributions wasn't reflected.

Proposal

This contribution proposes to clarify new extended subheaders which were not incorporated into D7 and rearrange section number.

References

- a) IEEE Std 802.16-2004
- b) IEEE P802.16e-D7
- c) Comment resolution 80216-05_012r3
- d) C80216e-05/163r3
- e) C80216e-05/95r3
- f) C80216e-05/197r2

Suggested Changes

Notes to editor: In this section, the text in black is the original text in p802.16e/D7. Instruction to editor is in 'GREEN'. Proposed text change is in 'BLUE' and 'RED'.

6.3.2.2.7 Extended Subheader Format

The Extended Subheader format is specified in Figure 20f. The Extended Subheader Field, when used, shall always appear immediately after the GMH and before all other subheaders, as described in 6.3.2.2. The ESF and all extended subheaders related to it shall not be encrypted, but shall be protected by the payload CRC field. The ESF and all extended subheaders associated to it are transmitted sequentially.

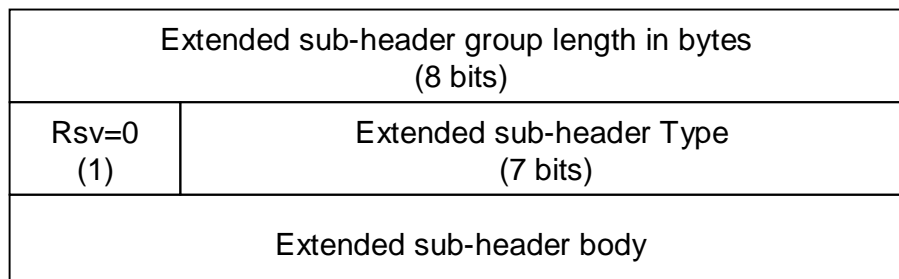


Figure 21 - Extended Subheader Format

The fields of the Extended Subheader structure are described in Table 13a

Table 13a - Extended subheader format (ESF)

Name	Length (bits)	Description
Extended subheader group length	8	The Extended Subheader Group Length field indicates the length of the subheader group, including all the subheader, and including this length byte
Reserved	1	Reserved =0
Extended Subheader type	7	Type of subheader as defined in table 13b
Extended subheader body	Variable	As defined in table 13b

1. Modify the Table 13b based on 80216-05_012r3

Table 13b - Description of extended subheaders

ESF Type value	Name	Length (bytes)	Description
0	SDU_SN Extended subheader	1	See 6.3.2.2.7.5 6.3.2.2.7.1
1	Generic downlink sleep header DL Sleep control Extended subheader	3	See 6.3.2.2.9 6.3.2.2.7.2
2	Feedback request Extended subheader	3	See 6.3.2.2.7.4 6.3.2.2.7.3
3	MIMO mode feedback Extended subheader	1	See 6.3.2.2.7.1 6.3.2.2.7.4
4	UL TX power report Extended subheader	1	See 6.3.2.2.7.6 6.3.2.2.7.5
<u>5</u>	Mini-Feedback Extended subheader	<u>2</u>	See 6.3.2.2.7.6
Bits #6-127	Reserved		

2. Change section 6.3.2.2.7.3 to section 6.3.2.2.7.1 and include comment #3098 resolution

~~6.3.2.2.8~~ [6.3.2.2.7.1](#) SDU SN Extended Subheader

The SDU SN Extended subheader shall only be sent by the BS if SN Feedback capability is supported and if SDU_SNSN-Feedback is enabled for a DL connection. The SDU SN Extended subheader shall contain the last virtual MAC SDU sequence number of current MAC PDU. ~~The format of the Feedback request extended subheader is as described in Table 13g.~~ The format of the SDU SN Extended subheader is as described in Table 13**h**c.

Table 13**h**c – SDU SN Extended Subheader [format](#)

3. Change section 6.3.2.2.10 to section 6.3.2.2.7.2

~~6.3.2.2.10~~ [6.3.2.2.7.2](#) DL Sleep control Extended subheader

The ~~following message~~-[DL Sleep control Extended subheader](#) is sent by the BS to activate/ deactivate certain Power Saving Class. The requested operation is effective from the next frame after the one where the message was transmitted. [The format of DL Sleep control Extended subheader is as described in Table 13d](#)

Table 13f d– ~~MOB_SLP_DLC-extended~~ DL Sleep control Extended subheader format (~~DL~~)**4. Change section 6.3.2.2.11 to section 6.3.2.2.7.3**~~6.3.2.2.11~~ 6.3.2.2.7.3 Feedback request Extended subheader

The Feedback request Extended subheader shall be only sent by BS to allocate dedicated UL resource for obtaining the feedback value from an MSS. The format of Feedback request Extended subheader is as described in Table 13g e

Table 13g e – Feedback request Extended subheader format

5. Include comment #3092 (C80216e-05/163r3) resolution

[Insert new section 6.3.2.2.7.4]

6.3.2.2.7.4 MIMO mode Feedback Extended subheader

An MS uses the MIMO Feedback Extended Subheader to provide its feedback in terms of MIMO mode feedback. When there is an UL MAC PDU payload to be transmitted at the same time. The format of the MIMO mode Feedback Extended subheader is as described in Table 13f

Table 13f – MIMO mode Feedback Extended subheader format

<u>Name</u>	<u>Length (bits)</u>	<u>Description</u>
<u>Feedback type</u>	<u>2</u>	<u>00: feedback type '000' as defined in Table 302a</u> <u>01: feedback type '001' as defined in Table 302a</u> <u>10: feedback type '010' as defined in Table 302a</u> <u>11: feedback type '011' as defined in Table 302a</u>
<u>Feedback content</u>	<u>6</u>	<u>Feedback contents and the corresponding feedback payload (6 bits) are the same as that defined in Table 302a and sections 8.4.5.4.10.4, 8.4.5.4.10.5, 8.4.5.4.10.6, 8.4.5.4.10.7, 8.4.5.4.10.8, 8.4.5.4.10.9, 8.4.5.4.10.10 for the Enhanced Fast-feedback channel</u>

For each MSS, if a MIMO mode Feedback Extended subheader is present, it shall only appear in the first unicast PDU transmitted by that MS in that frame.

[Remove section 6.3.2.2.8 and section 6.3.2.2.9]

~~6.3.2.2.8 Mode Selection Feedback Extended Subheader~~

~~6.3.2.2.9 Fast UL Feedback subheader~~

6. Include comment #3053 (C80216e-05/95r3) resolution6.3.2.2.7.5 UL Tx Power Report Extended Subheader

This subheader is sent from MS to BS to report the Tx power of the burst that carries this subheader. The format of the UL Tx power report Extended subheader is as described in Table 13g

Table 13g— UL Tx power report Extended subheader format

<u>Name</u>	<u>Size (bits)</u>	<u>Description</u>
<u>UL Tx power</u>	<u>7</u>	<u>Tx power level for the burst carries this header(11.1.1). The maximum value shall be reported for the burst</u>
<u>Reserved</u>	<u>1</u>	<u>Set to 0</u>

7. Include comment #3066 resolution

6.3.2.2.7.6 Mini-Feedback Extended Subheader

The format of the mini-feedback Extended subheader is shown in table 13h

Table 13h - Description of Mini-Feedback Extended Subheaders (UL)

<u>Name</u>	<u>Size (bits)</u>	<u>Description</u>
<u>Feedback type</u>	<u>4</u>	<u>Type of feedback: see table 7i</u>
<u>Feedback content</u>	<u>12</u>	

[Remove section 6.3.2.1.6.2]

6.3.2.1.6.2 Mini Feedback header

8. Insert capability related to extended subheader based on C802.16e-05/197r2

11.8.6 Extension capability

Specifies extension capability supports

<u>Type</u>	<u>Length</u>	<u>Value</u>	<u>Scope</u>
<u>27</u>	<u>1</u>	<u>Bit#0: Support Extended subheader format</u> <u>Bit#1-7: Reserved</u>	<u>SBC-REQ/RSP</u>

[Change 11.8.2 Capabilities for construction and transmission of MAC PDUs]

<u>Type</u>	<u>Length</u>	<u>Value</u>	<u>Scope</u>
<u>4</u>	<u>1</u>	Bit #0: Ability to receive requests piggybacked with data Bit #1: Specifies the size of FSN values used when forming MAC PDUs on non-ARQ connections 0: Only 3-bit FSN values are supported 1: Only 11-bit FSN values are supported Bits #2–7: <i>Reserved</i> ; shall be set to zero Bit #2: Specifies support for MSF extended subheader (see 6.3.2.2.7.1) Bit #3: Specifies support for Generic Sleep Extended subheader. (see 6.3.2.2.7.2) Bit #4: Specifies support for Feedback Request Extended subheader (see 6.3.2.2.7.3) Bits #5 #7: Reserved, shall be set to zero	REG-REQ REG-RSP SBC-REQ SBC-RSP

[Modify 11.7.17 MS Feedback support because the Mode selection Feedback subheader and header already removed]

The 'MS Feedback support' field indicates the support of ~~Mode Selection Feedback~~. [Feedback Header](#)

Type	Length	Value	Scope
20	1	Bit #0: Mode Selection Feedback Extended Subheader supported Feedback Header supported Bit #1: Mode Selection Feedback Header Bits # 2 <u>1</u> -7: <i>Reserved</i> : shall be set to zero	REG-REQ REG-RSP