

IEEE P 802.20™/PD<insert PD Number>/V<insert version number>

Date: <June 04.2003>

Draft 802.20 Permanent Document

<802.20 Requirements Document >

This document is a Draft Permanent Document of IEEE Working Group 802.20. Permanent Documents (PD) are used in facilitating the work of the WG and contain information that provides guidance for the development of 802.20 standards. This document is work in progress and is subject to change.

Contents

- 1 Overview5
 - 1.1 Scope5
 - 1.2 Purpose5
 - 1.3 PAR Summary5
- 2 Overview of Services and Applications7
 - 2.1 Voice Services8
- 3 System Reference Architecture8
 - 3.1 System Architecture8
 - 3.2 Definition of Interfaces9
- 4 Functional and Performance Requirements10
 - 4.1 System10
 - 4.1.1 Link Budget10
 - 4.1.2 Spectral Efficiency (bps/Hz/sector)10
 - 4.1.3 Frequency Reuse10
 - 4.1.4 Channel Bandwidths10
 - 4.1.5 Duplexing10
 - 4.1.6 Mobility10
 - 4.1.7 Aggregate Data Rates – Downlink & Uplink10
 - 4.1.8 Number of Simultaneous Sessions11
 - 4.1.9 Latency11
 - 4.1.10 Packet Error Rate11
 - 4.1.11 Use of Multi Antenna Capabilities12
 - 4.1.12 Network availability12
 - 4.1.13 QOS12
 - 4.1.14 Security12
 - 4.1.15 Handoff Support13

- 4.2 PHY/RF14
 - 4.2.1 Receiver sensitivity.....14
 - 4.2.2 Link Adaptation and Power Control.....14
 - 4.2.3 Max tolerable delay spread Performance under mobility14
 - 4.2.4 Duplexing – FDD & TDD14
- 4.3 Spectral Requirements14
 - 4.3.1 Adaptive Modulation and Coding15
 - 4.3.2 Layer 1 to Layer 2 Inter-working15
- 4.4 Layer 2 MAC (Media Access Control)15
 - 4.4.1 Quality of Service and the MAC15
- 4.5 Layer 3+ Support.....22
 - 4.5.1 OA&M Support.....22
 - 4.5.2 Scheduler22
 - 4.5.3 MAC Complexity Measures22
- 4.6 User State Transitions.....22
- 4.7 Resource Allocation23
- 5 References23
- Appendix A Definition of Terms and Concepts.....24
- Appendix B Unresolved issues27
 - 5.1.1 MBWA-Specific Reference Model29

1 **1 Overview**

2 **1.1 Scope**

3 This document defines system requirement for the IEEE 802.20 standard development
4 project. These requirements are consistent with the PAR (IEEE SA Project Authorization
5 Request) document (see section 1.3 below) and shall constitute the top-level specification
6 for the 802.20 standard. For the purpose of this document, an “802.20 system” constitutes
7 an 802.20 MAC and PHY implementation in which at least one Mobile station
8 communicates with a base station via a radio air interface, and the interfaces to external
9 networks, for the purpose of transporting IP packets through the MAC and PHY protocol
10 layers.

11 **1.2 Purpose**

12 This document establishes the detailed requirements for the Mobile Broadband Wireless
13 Access (MBWA) systems.

14 **1.3 PAR Summary**

15 The scope of the PAR (listed in Item 12) is as follows:

16

17 *“Specification of physical and medium access control layers of an air interface*
18 *for interoperable mobile broadband wireless access systems, operating in*
19 *licensed bands below 3.5 GHz, optimized for IP-data transport, with peak data*
20 *rates per user in excess of 1 Mbps. It supports various vehicular mobility classes*
21 *up to 250 Km/h in a MAN environment and targets spectral efficiencies, sustained*
22 *user data rates and numbers of active users that are all significantly higher than*
23 *achieved by existing mobile systems.”*

24

25 In addition, a table (provided in Item 18) lists “additional information on air interface
26 characteristics and performance targets that are expected to be achieved.”

27

<i>Characteristic</i>	<i>Target Value</i>
<i>Mobility</i>	<i>Vehicular mobility classes up to 250 km/hr (as defined in ITU-R M.1034-1)</i>
<i>Sustained spectral efficiency</i>	<i>> 1 b/s/Hz/cell</i>


<i>Peak user data rate (Downlink (DL))</i>	<i>> 1 Mbps*</i>
<i>Peak user data rate (Uplink (UL))</i>	<i>> 300 kbps*</i>
<i>Peak aggregate data rate per cell (DL)</i>	<i>> 4 Mbps*</i>
<i>Peak aggregate data rate per cell (UL)</i>	<i>> 800 kbps*</i>
<i>Airlink MAC frame RTT</i>	<i>< 10 ms</i>
<i>Bandwidth</i>	<i>e.g., 1.25 MHz, 5 MHz</i>
<i>Cell Sizes</i>	<i>Appropriate for ubiquitous metropolitan area networks and capable of reusing existing infrastructure.</i>
<i>Spectrum (Maximum operating frequency)</i>	<i>< 3.5 GHz</i>
<i>Spectrum (Frequency Arrangements)</i>	<i>Supports FDD (Frequency Division Duplexing) and TDD (Time Division Duplexing) frequency arrangements</i>
<i>Spectrum Allocations</i>	<i>Licensed spectrum allocated to the Mobile Service</i>
<i>Security Support</i>	<i>AES (Advanced Encryption Standard)</i>

1

2 * Targets for 1.25 MHz channel bandwidth. This represents 2 x 1.25 MHz (paired)
3 channels for FDD and a 2.5 MHz (unpaired) channel for TDD. For other bandwidths,
4 the data rates may change.

1 2 Overview of Services and Applications

2

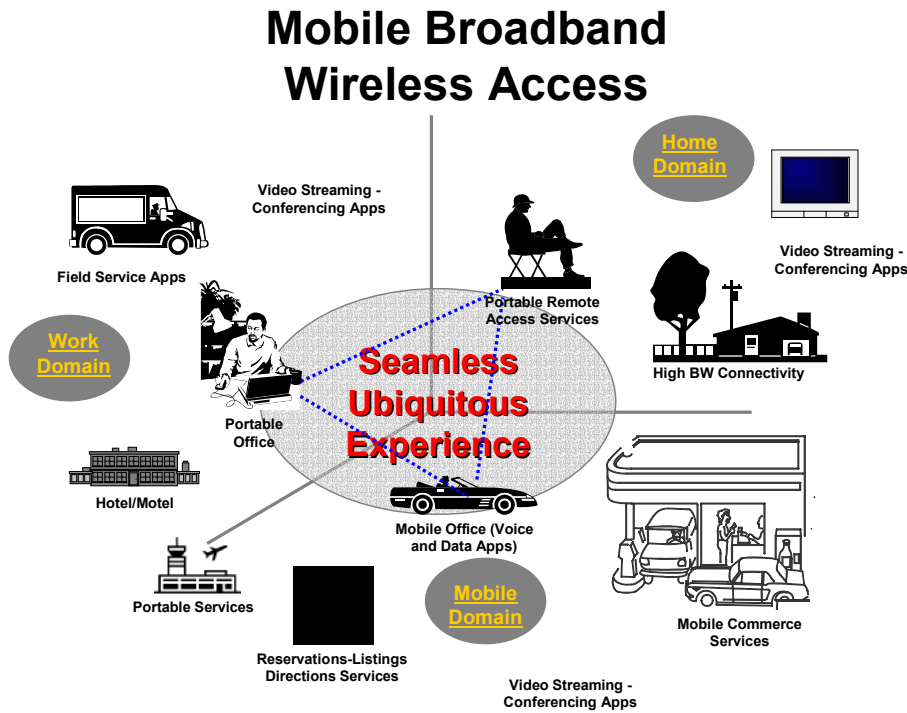

3
4

5 The 802.20 Air-Interface (AI) shall be optimized for high-speed IP-based data services
 6 operating on a distinct data-optimized RF channel. The AI shall support compliant
 7 Mobile Terminal (MT) devices for mobile users, and shall enable improved performance
 8 relative to other systems targeted for wide-area mobile operation. The AI shall be
 9 designed to provide best-in-class performance attributes such as peak and sustained data
 10 rates and corresponding spectral efficiencies, system user capacity, air- interface and end-
 11 to-end latency, overall network complexity and quality-of-service management.
 12 Applications that require the user device to assume the role of a server, in a server-client
 13 model, shall be supported as well.

14 **Applications:** The AI all shall support interoperability between an IP Core Network and
 15 IP enabled mobile terminals and applications shall conform to open standards and
 16 protocols. This allows applications including, but not limited to, full screen **video**, full
 17 graphic web browsing, e- mail, file upload and download without size limitations (e.g.,
 18 FTP), video and audio streaming, IP Multicast, Telematics, Location based services,
 19 VPN connections, VoIP, instant messaging and on- line multiplayer gaming.

1 **Always on:** The AI shall provide the user with “always-on” connectivity. The
2 connectivity from the wireless MT device to the Base Station (BS) shall be automatic and
3 transparent to the user.


4 **2.1 Voice Services**

5 The MBWA will support VoIP services. QoS will provide latency, jitter, and packet loss
6 required to enable the use of industry standard Codec’s. When the bandwidth required
7 for a call cannot be reserved, the system will provide signaling to support call blocking.

8 **3 System Reference Architecture**

9 **3.1 System Architecture**

10 The 802.20 systems must be designed to provide ubiquitous mobile broadband wireless
11 access in a cellular architecture. The system architecture must be a point to multipoint
12 system that works from a base station to multiple devices in a non-line of sight outdoor to
13 indoor scenario. The system must be designed to enable a macro-cellular architecture
14 with allowance for indoor penetration in a dense urban, urban, suburban and rural
15 environment.

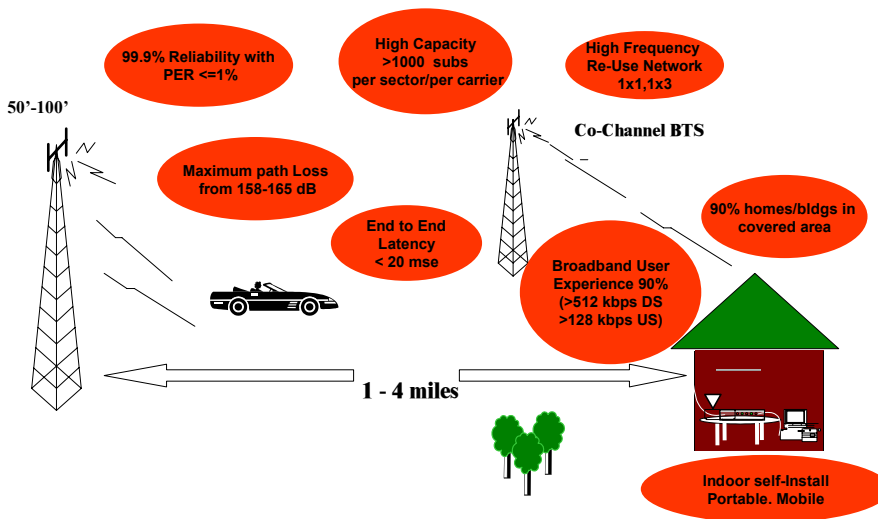

1 The AI shall support a layered architecture and separation of functionality between user,
2 data and control planes. The AI must efficiently convey bi-directional packetized, bursty
3 IP traffic with packet lengths and packet train temporal behavior consistent with that of
4 wired IP networks. The 802.20 AI shall support high-speed mobility.

5 **3.1.1 MBWA System Reference Architecture**

6 “To be supplied by Mark Klerer and Joanne Wilson”

7

8 **3.2 Definition of Interfaces**


9 Open interfaces: The AI shall support open interfaces between the base station and any
10 upstream network entities. Any interfaces that may be implemented shall use IETF
11 protocols as appropriate. Some of the possible interfaces are illustrated below.

Formatted: Heading 3,h3,3,H3

Formatted: Bullets and Numbering

Formatted: Normal

MBWA Interfaces

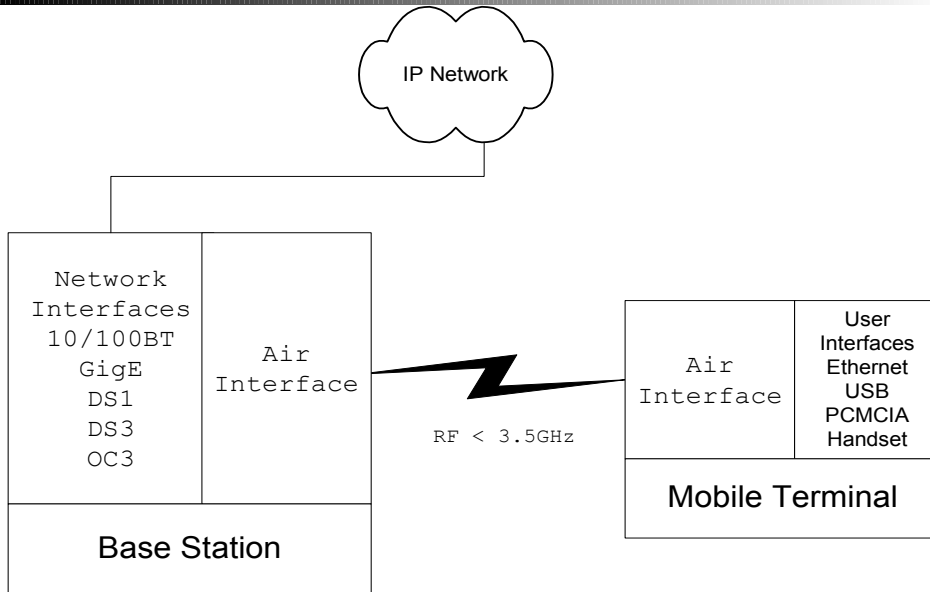

12

4 Functional and Performance Requirements

4.1 System

4.1.1 System Gain “section to be provided by Arif Ansari, Reza Arefi, Jim Mollenauer, and Khurram Sheikh”.

Formatted: Bullets and Numbering

4.1.2 Spectral Efficiency (bps/Hz/sector)

Deleted: <#>Link Budget
Link budget has been proposed at 150-170, 160-170 and removed.
The system link bud get shall be 160-170 dB for all devices and terminals at the data rates specified in the earlier section assuming best practices in terms of base station design, user terminal design, and deployment techniques.

Rewritten to accommodate Michael Youssefmir comments along with perceived meaning and Sprints contribution. Michael Youssefmir to supply definition of expected aggregate throughput for Apendix B.

Sustained spectral efficiency is computed in a loaded multicellular network setting. It is defined as the ratio of the expected aggregate throughput (taking out all PHY/MAC overhead) to all users in an interior cell divided by the system bandwidth. The sustained spectral efficiency calculation shall assume that users are distributed uniformly throughout the network and shall include a specification of the minimum expected data rate/user.

Downlink > 2 bps/Hz/sector

Uplink >1 bps/Hz/sector

4.1.3 Frequency Reuse

The AI shall support universal frequency reuse but also allow for system deployment with frequency reuse factors of less than or greater than 1.

4.1.4 Channel Bandwidths

The AI shall support channel bandwidths in multiples of 5MHz in downlink and the uplink.

4.1.5 Duplexing

The AI shall support both Frequency Division Duplexing (FDD) and Time Division Duplexing (TDD).

4.1.6 Mobility

The AI shall support different modes of mobility from pedestrian (3 km/hr) to very high speed (250 km/hr) but shall not be optimized for only one mode. As an example, data rates gracefully degrade from pedestrian speeds to high speed mobility.

4.1.7 Aggregate Data Rates – Downlink & Uplink

Michael Youssefmir from Arraycomm asked the previous two tables be stricken. Sprint contributed the following table for 5 MHz channels in line with the spectral efficiency above. Kei Suzuki believes the numbers were not reflective of the Par. Shall the PAR be minimums?

1 The aggregate data rate for downlink and uplink shall be consistent with the spectral
2 efficiency. An example of a 5MHz FDD channel is shown in Table 1 below.
3

Description	Downlink	Uplink
Outdoor to Indoor Expected Aggregate Data Rate	> 10 Mbps/Sector	> 5Mbps/Sector

Deleted: Average

4

5 User Data Rates - – Downlink & Uplink
6

7 The AI shall support peak per-user data rates in excess of 1 Mbps on the downlink and in
8 excess of 300 kbps on the uplink. These peak data rate targets are independent of channel
9 conditions, traffic loading, and system architecture. The peak per user data rate targets
10 are less than the peak aggregate per cell data rate to allow for design and operational
11 choices.

12 Average user data rates in a loaded system shall be in excess of 512Kbps downlink and
13 128Kbps uplink. This shall be true for 90% of the cell coverage or greater.

14 Sprint added a definition.

15 **4.1.8 Number of Simultaneous Sessions**

16 > 100 sessions per carrier for a 5Mhz system. “Simultaneous” will be defined as the
17 number active-state Mobile Terminal having undergone contention/access and scheduled
18 to utilize AI resources to transmit/Receive data within a 10 msec time interval.

19 **4.1.9 Latency**

20 The system shall have a one-way target latency of 20 msec from the base station to the
21 end-device when the system is under load.

22 The AI shall minimize the round-trip times (RTT) and the variation in RTT for
23 acknowledgements, within a given QoS traffic class. The RTT over the airlink for a
24 MAC data frame is defined here to be the duration from when a data frame is received by
25 the physical layer of the transmitter to the time when an acknowledgment for that frame
26 is received by the transmitting station. The airlink MAC frame RTT, which can also be
27 called the “ARQ loop delay,” shall be less than 10 ms. Fast acknowledgment of data
28 frames allows for retransmissions to occur quickly, reducing the adverse impact of
29 retransmissions on IP packet throughput. This particularly improves the performance of
30 gaming, financial, and other real-time low latency transactions.

Deleted: , over the air interface

Deleted: .

31 **4.1.10 Packet Error Rate**

32 The physical layer shall be capable of adapting the modulation, coding, and power levels
33 to accommodate RF signal deterioration between the BS and user terminals. The air
34 interface shall use appropriate ARQ schemes to ensure that error rates are reduced to a

1 suitably low level, in order to accommodate higher level IP based protocols (for example,
2 TCP over IP). The packet error rate for 512 byte IP packet shall be less than 1 percent
3 after error correction and before ARQ.

Deleted: s

4 **4.1.11 Support for Multi Antenna Capabilities**

Deleted: Use of

6 Interconnectivity at the PHY/MAC will be provided at the Base Station and/or the Mobile
7 Terminal for advanced multi antenna technologies to achieve higher effective data rates,
8 user capacity, cell sizes and reliability. As an example, MIMO operation,

Deleted: Support

9 **4.1.12 Antenna Diversity**

Deleted: ¶

Formatted: Heading 3,h3,3,H3

10 At a minimum, both the Base Station and the Mobile Terminal shall provide two element
11 diversity. Diversity may be an integral part of an advanced antenna solution.

Formatted: Font: 12 pt

12 **4.1.13 Best Server Selection**

Formatted: Heading 3,h3,3,H3

13 In the presence of multiple available Base Stations, the system Phy/MAC will select the
14 best server based upon system loading, signal strength, capacity and tier of service.
15 Additional weighting factors may also include back haul loading and least cost routing.

Formatted: Font: 12 pt

16 **4.1.14 QoS**

Deleted: Network availability¶
It has been proposed this be deleted as an operator Sprint feels it is a minimum target.¶
The end to end system availability shall be 99.9%.

17 The AI shall support the means to enable end-to-end QoS within the scope of the AI and
18 shall support a Policy-based QoS architecture. The resolution of QoS in the AI shall be
19 consistent with the end-to-end QoS at the Core Network level. The AI shall support IPv4
20 and IPv6 enabled QoS resolutions, for example using Subnet Bandwidth Manager. The
21 AI shall support efficient radio resource management (allocation, maintenance, and
22 release) to satisfy user QoS and policy requirements

Formatted: Font: 12 pt, Font color: Auto

Formatted: Bullets and Numbering

Deleted: O

24 **4.1.15 Security**

Formatted: Bullets and Numbering

25 Network security in MBWA systems shall protect the service provider from theft of
26 service, the user's privacy and mitigate against denial of service attacks. Provision shall
27 be made for authentication of both base station and mobile terminal, for privacy, and for
28 data integrity consistent with the best current commercial practice. 802.20 security is
29 expected to be a partial solution complemented by end-to-end solutions at higher protocol
30 layers such as EAP, TLS, SSL, IPSec, etc.

Deleted: is assumed to have goals similar to those in cellular or PCS systems. These goals are to

Deleted: and to protect

31 **4.1.15.1 Access Control**

Formatted: Bullets and Numbering

32 A cryptographically generated challenge-response authentication mechanism for the user
33 to authenticate the network and for the network to authenticate the user must be used.

34 **4.1.15.2 Privacy Methods**

Formatted: Bullets and Numbering

35 A method that will provide message integrity across the air interface to protect user data
36 traffic, as well as signaling messages from unauthorized modification will be specified.

1 Encryption across the air interface to protect user data traffic, as well as signaling
2 messages, from unauthorized disclosure will be incorporated.

3 **4.1.15.3 User Privacy**

Formatted: Bullets and Numbering

4 The system will prevent the unauthorized disclosure of the user identity.

5 **4.1.15.4 Denial of Service Attacks**

Formatted: Bullets and Numbering

6 It shall be possible to prevent replay attacks by minimizing the likelihood that
7 authentication signatures are reused.

8 It shall be possible to provide protection against Denial of Service (DOS) attacks.

9 **4.1.15.5 Security Algorithm**

Formatted: Bullets and Numbering

10 The authentication and encryption algorithms shall be publicly available on a fair and
11 non-discriminatory basis.

12 National or international standards bodies shall have approved the algorithms.

13 The algorithms shall have been extensively analysed by the cryptographic community to
14 resist all currently known attacks.

Formatted: Bullets and Numbering

15 **4.1.16 Handoff Support**

16 Handoff methods are required in MBWA systems to facilitate providing continuous service for a
17 population of moving Mobile Stations. Mobile stations may move between cells, between systems,
18 between frequencies, and at the higher layer between IP Subnets. At the lowest layers, handoffs can be
19 classified as either soft or hard handoffs, depending on whether there is a momentary service disruption or
20 not.

Formatted: Bullets and Numbering

21 **4.1.16.1 Soft Handoff**

22 **4.1.16.2 Hard Handoff**

23 **4.1.16.3 Hard Handoff Between Similar MBWA Systems**

24 **4.1.16.4 Hard Handoff Between Frequencies**

25 **4.1.16.5 IP-Level Handoff**

26 Kei Suzuki Asked this be removed. Sprint would like it to be considered even though it is above level 2.

27 Version by Michael Youssefmir

28 In supporting high speed mobility in an all IP network, the MBWA air interface shall be designed in a
29 manner that does not preclude the use of MobileIP or of SimpleIP for the preservation of IP session state as
30 a subscriber's session is handed over from one base station or sector to another.

31 Multiple IP addresses behind one terminal may also be supported.

1 In order to support high speed mobility in an all IP network Mobile IP will have to be
2 supported at a higher level. Integration of Foreign Agent or proxy Mobile IP into the
3 base station or terminal will be required to support a clientless solution. Multiple IP
4 addresses behind a single terminal shall also be supported.
5

6 **4.2 PHY/RF**

7 **4.2.1 Receiver sensitivity**

8 Blocking and selectivity specifications shall be consistent with best commercial practice
9 for mobile wide-area terminals.

10 **4.2.2 Link Adaptation and Power Control**

11 The AI shall support automatic selection of optimized user data rates that are consistent
12 with the RF environment constraints and application requirements. The AI shall provide
13 for graceful reduction or increasing user data rates, on the downlink and uplink, as a
14 mechanism to maintain an appropriate frame error rate performance. The Radio system
15 shall provide at least 99.9 link reliability.

16 Link adaptation shall be used by the AI for increasing spectral efficiency, peak data rate,
17 and cell coverage reliability. The AI shall support adaptive modulation and coding,
18 adaptive bandwidth allocation, and adaptive power allocation.

19 **4.2.3 Max tolerable delay spread Performance under mobility**

20 The system is expected to work in dense urban, suburban and rural outdoor-indoor
21 environments and the relevant channel models shall be applicable. The system shall NOT
22 be designed for indoor only and outdoor only scenarios.

23 **4.2.4 Duplexing – FDD & TDD**

24 The 802.20 standard shall support both Frequency Division Duplex (FDD) and Time
25 Division Duplex (TDD) frequency arrangements.

26 **4.3 Spectral Requirements**

27 The system shall be targeted for use in TDD and FDD licensed spectrum allocated to
28 mobile services below 3.5GHz. The AI shall be designed for deployment within existing
29 and future licensed spectrum below 3.5 GHz. The MBWA system frequency plan shall
30 include both paired and unpaired channel plans with multiple bandwidths, e.g., 1.25 or 5
31 MHz, etc., to allow co-deployment with existing cellular systems. Channel bandwidths
32 are consistent with frequency plans and frequency allocations for other wide-area
33 systems

34 The design shall be readily extensible to wider channels as they become available in the
35 future.

1 **4.3.1 Adaptive Modulation and Coding**

2 The system will have adaptive modulation in both the uplink and the downlink

3 **4.3.2 Layer 1 to Layer 2 Inter-working**

4 The interface between layers 1 and 2 is not an exposed interface; it may be handled at the
5 implementer’s discretion.

6 **4.4 Layer 2 MAC (Media Access Control)**

7

8 **4.4.1 Quality of Service and the MAC**

9 Several submissions for QOS have been sent now.

10 Michael Youssefmir wrote’

11 "The 802.20 air interface shall support standard Internet Differentiated
12 Services (DS) QoS to be compatible with other mobile network standards
13 such as 3GPP2. In particular, 802.20 shall support the standard
14 Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE)
15 DS Per Hop Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598.
16 802.20 shall also support configuration of the PHBs by a DS API that
17 shall be based on a subset of the information model defined in RFC 3289.
18

19 The 802.20 air interface will provide an API to higher layer entities
20 for the purpose of requesting QoS attributes on a per-session basis. The
21 API will also provide a mechanism for the air interface to inform higher
22 layer entities whether a particular QoS request is to be honored. It is
23 the responsibility of higher layer entities to take appropriate action
24 based on such messages."

25 Bill Young Submitted.

26 Quality of Service and Class of Service

27

28 This section describes the quality of service and classes of services
29 for 802.20 systems. Terminology is borrowed from Internet Engineering
30 Task Force (IETF) and the IEEE 802.16.3 functional requirements.

31

32 802.20 protocols must support classes of service (COS) with various
33 quality of service guarantees. The 802.20 protocol standards must define
34 the interfaces and procedures that that facilitates the requirements for
35 the allocation and prioritization of resources. 802.20 protocols must
36 also provide the means to enforce QoS contracts and Service Level
37 Agreements (SLA). Table 1 provides a summary of the QoS requirements
38 that the PHY and MAC layers shall meet. Note that the parameters in the
39 table are measured between the MAC input and the upper layer at the
40 transmit station and the MAC output at the upper layer of the receiving
41 station for information transmission. For example, delay does not
42 include setup time, link acquisition, voice codec’s, etc.
43

44 For QoS based connectionless services, the 802.20 protocols must support
45 resources negotiated on-demand. For example, the MAC protocol may
46 allocate bursts of PDUs to services that require changes in resource
47 allocation. Such allocation, for connectionless services, is thus
48 performed in a semi-stateless manner.

1
2
3
4
5
6
7
8
9
10
11

A connection-oriented service may require state information to be maintained for the life of a connection. However, the 802.20 MAC layer interface may provide a connection-less service interface that require higher layer adaptation to maintain the state of the connection and periodically allocate resources. For instance, the MAC may need to maintain state information about the QoS data flow only for the duration of an allocation.

Table 1: Services and QoS Requirements

Service	Maximum Error Rate	Maximum Access Delay (One Way)
Full Quality Telephony (Vocoder MOS > 4.0)	BER 10 ⁻⁴	20 ms
Standard Quality Telephony (Vocoder MOS < 4.0)	BER 10 ⁻³	40 ms
Time Critical Packet Services	BER 10 ⁻⁴	20 ms
Non-time Critical Packet Services - best effort	BER 10 ⁻³	Not applicable

12
13
14

Note: These parameters should be vetted by the group.

1 Types and Classes of Service
2 The fundamental direction for the QoS model is that will be exported to
3 MBWA endpoints will be IP based and conform to IETF DiffServ QoS model
4 in conjunction with other IP based protocols. The DiffServ QoS model
5 defines traffic for all services as follows:
6
7 Expedited Forwarding (EF): EF requires a constant periodic access to
8 bandwidth. The bandwidth requirements may vary within a specific range,
9 but delay and delay variance limits are specified. Examples that fall
10 into this category are voice-over-IP (VoIP), videoconferencing, video on
11 demand (VoD) and other multimedia applications.
12 Assured Forwarding (AF): In AF the bandwidth varies within a specified
13 range, but has loose delay and delay variance requirements.
14 Applications, which are limited in their bandwidth usage, may fall in
15 this category. AF services allow the traffic to be divided into
16 different classes. Using this capability, an ISP can offer a tiered
17 services model. For example there could be four classes platinum, gold,
18 silver and bronze with decreasing levels of service quality as well as
19 maximum allocated bandwidth, with platinum getting the high share of
20 resources and bronze getting lowest. This would facilitate premium
21 priced service level agreements.
22 Best Effort Service (BES): The bandwidth varies within a wide range and
23 is allowed to burst up to the maximum link bandwidth when EF and AF
24 services are not using bandwidth. The bandwidth and delay requirements
25 may or may not be specified. Higher variations of delay may be
26 acceptable since applications that utilize BES allow for a lower grade
27 of service due to preemption by EF and AS traffic. Current Internet
28 service is an example of best effort service.
29
30
31 Traffic Shaping For Service Level agreements
32 The 802.20 protocols shall enable the provisioning and signaling of
33 parameters for the guaranteeing of minimum allocated bandwidth used by
34 applications as set by the SLA. This would be accomplished through
35 access throttling, discarding packets and dynamically assigning
36 available bandwidth. The number of service levels, data rates and
37 congestion control parameters will be called out in the 802.20
38 specifications.
39
40 Parameters
41
42 802.20 protocols shall define a set of parameters that preserve the
43 intent of the QoS parameters for all IP based services supported.
44

1 Service and QoS Mapping

2
3 The classes of service and QoS parameters of all services shall be
4 translated into a common set of parameters defined by 802.20. A QoS base
5 IP network may employ the Resource Reservation Protocol (RSVP) to signal
6 the allocation of resources along a routed IP path. If 802.20 is to be a
7 link in the IP network, an IWF must interface with 802.20 to negotiate
8 resource allocation.
9

10 The basic mechanism available from 802.20 systems for supporting QoS
11 requirements is to allocate bandwidth to various services. 802.20
12 protocols should include a mechanism that can support dynamically
13 variable bandwidth channels and paths (such as those defined for IP
14 environments).
15

16 Sprint submitted what is in the body before the other submissions.

17 ▲ The System MUST support grouping of transmission properties into service classes, so
18 enabling upper layer entities and external applications can be mapped to request
19 transmission intervals capable of exhibiting desired QoS parameters in a globally
20 consistent manner. The QoS sub-system will adopt a "Matched Criteria" and
21 "Enforcement" methodology, such that packets and flows characteristics being fed into
22 the system that match a pre-defined rule set will be enforced accordingly.

Formatted: Font color: Orange

23 **4.4.1.1 Cos/QoS Matched-Criteria**

24 The system must be able to fingerprint ingress traffic based upon the matched criterias as
25 defined below. The system shall be designed such that one or multiple (as many as 8)
26 matched criterias can be placed into an enforcement policy.

27 **4.4.1.1.1 Protocol Field Mapping**

Formatted: Heading 5

Formatted: Bullets and Numbering

28 Flexible bit-based masking of multiple fields at every layer MUST be made available for
29 purposes of identifying packets. These matched criterions include but are not limited to:

30 L4 Protocol field (UDP/TCP port number)

31 L4 Header length

32 L4 TCP flags

33 L4 TCP options (if present)

34 L3 Protocol field

35 L3 Source address/network

36 L3 Destination address/network

37 L3 Total length

38 L3 Fragmentation (Initial 4 bits of two-byte field)

- 1 L3 DiffServe/TOS field (to include ECN)
- 2 L2 Ethernet hardware address (two groups, 3 bytes each / entire 6 byte address)
- 3 L2 Ethertype
- 4 L2 802.1Q/p
- 5 L7 Unencrypted HTTP version 1.x protocol fingerprinting (desired)
- 6 **4.4.1.1.2 Hardware Mapping**
- 7 The system shall be able to differentiate policies bound to groups of Mobile Stations.
- 8 **4.4.1.1.3 Additional Criteria**
- 9 Additional criterion must be evaluated by both Mobile and Base Station: Ingress Flow
- 10 rates (source/destination IP address and port numbers) Ingress Aggregate data rates
- 11 Data tonnage-based L3 resource usage quotas
- 12 Airtime utilization-based PHY resource usage quotas
- 13 **4.4.1.2 CoS/QoS Enforcement**
- 14 The following "ENFORCEMENT" actions will be available to handle matched-criteria.
- 15 Prioritization
- 16 The system must make available no less than eight node-based priority queues. Mobile
- 17 Nodes provisioned with the highest priority will have a more heavily weighted
- 18 probability for service. Conversely, Mobile Nodes provisioned for the lowest available
- 19 priority will only be given service if PHY/MAC resources are available.
- 20 Error Correction
- 21 Higher coding / ARQ: The system must have the ability to increase the probability of a
- 22 successful packet transmission.
- 23 Queuing
- 24 The system must make available no less than sixteen flow-based operator-defined priority
- 25 queues. Latency, priority, jitter, error-correction, maximum throughput and queue depths
- 26 will be considered for the development of these queues.
- 27 Suppression
- 28 Hard drop: The system MUST be able to block matched packet prior to transmission over
- 29 either uplink or downlink air interfaces.

Formatted: Heading 5, Indent: Left: 0.7", Tabs: 0.7", List tab

Formatted: Bullets and Numbering

Formatted: Heading 5, Indent: Left: 0.7", Tabs: 0.7", List tab

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

1 Reservation

2 When requested a fixed amount of bandwidth must be allocated for use. If the
3 reservation request can't be fulfilled the MAC must signal back so it can be handled at
4 higher layer.

5 **4.4.1.2.1 Aggregate Bandwidth Partitioning**

6 Partitioning: The system must allow for partitioning of the aggregate bandwidth pipe.
7 While the base station equipment is operating in a resource under-utilized state, any
8 unused bandwidth must be made available to Mobile Stations requiring the resources
9 regardless of which partition the CPE has been provisioned for (soft partitioning).

10 **4.4.1.2.2 Interface Binding**

11 Policy enforcement shall be implemented on CPE packet input and base station packet
12 output, as applicable, such that PHY/MAC resources are not unnecessarily utilized.
13 Packet-queuing and queue-depths must be configurable for both base station WAN
14 ingress and mobile station LAN ingress interfaces. Queue depth configuration will be
15 available in increments of datagrams and time.

16 **4.4.1.2.3 Packet Mangling**

17 Packet/Frame manipulation: IP Diffserve/TOS field modification to any predetermined
18 operator value. For customer redirection, the destination address of IP packets shall be
19 modified to any predetermined operator value (captive portal, acceptable usage policy
20 violation, etc). For bridged environments, the system MUST possess the ability to
21 modify the 802.1p priority field to any predetermined operator specified value. Marking
22 will take place at either the Mobile or Base Station, as appropriate.

23 **4.4.1.2.4 Resource Scheduling**

24 PHY/MAC resource scheduling: System must possess ability to starve a Mobile Station's
25 resource allocation of PHY resources for an operator specified time value, with
26 resolution of 10ms increments.

27 **4.4.1.2.5 Rate-limiting**

28 Throughput rate limiting: System must allow for an endpoint node egress to be rate
29 limited in increments of 8kbs, with classifications for peak and best-effort minimum
30 resource allocation. During under-load conditions, unused bandwidth must be made
31 available to satisfy active CPE bursting requirements.

32 **4.4.1.3 ARQ/Retransmission**

33 The AI shall support ARQ/retransmission. The system must not induce more than 10ms
34 latency for the retransmission of a lost block of data. Dropped data segments shall not
35 hinder the timely delivery of any subsequent datagrams (successfully reconstructed
36 datagrams shall not wait in queue for the reconstruction of datagrams that encountered
37 dropped packets and are waiting to be re-sent).

Formatted: Heading 5
Formatted: Bullets and Numbering

Formatted: Heading 5
Formatted: Bullets and Numbering

Formatted: Heading 5
Formatted: Bullets and Numbering

Formatted: Heading 5
Formatted: Bullets and Numbering

Formatted: Heading 5
Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

1 **4.4.1.3.1 End to End Latency**

2 The MAC protocol must guarantee periodic access to the medium. PHY resources
3 dedicated for this function must not impact system goodput capacity by more than 5%.
4 The contention access mechanism must not incur more than 15 msec system delay,
5 excluding the time the system is in a blocking state due to over-capacity on the
6 contention medium.

7 The first packet pass-through initiated by the subscriber, while the mobile station is not in
8 an active state, must incur less than 20 msec one-way delay (inclusive of
9 contention/access latencies). The first packet pass-through initiated by the base station,
10 while the mobile station is not in an active state, must incur less than 20 msec one-way
11 delay, exclusive of regular active-state latencies.

12 64-byte packet pass-through must comply with a maximum round trip delay of less than
13 20 msec, exclusive of input or output queue depth and contention delay.

14 **4.4.1.3.2 End to End Latency Variation**

15 Contention/access delays must remain constant, regardless of the number of mobile
16 stations already in an active state.

17 **4.4.1.4 Protocol Support**

18 The system must support transport of variable length Internet Protocol packets ranging
19 from 46 to 1500 bytes. Segmentation and re-assembly techniques may be used to arrange
20 traffic on the medium.

21 The system must be able to support the optional suppression of any and all L2 and L3
22 broadcasts, as applicable, at the Mobile or Base Stations (see QoS section Matched
23 Criteria).

24 The system must be capable of passing IPSec traffic (RFC2401), and as such, be capable
25 of functioning with off-the-shelf VPN software and hardware. The system must be
26 capable of passing additional encapsulation protocol types: GRE (RFC1701), L2TP
27 (RFC2261), PPTP (RFC2637).

28 **4.4.1.5 Addressing**

29 For external Mobile Stations with Ethernet adapters, the system must be capable of
30 limiting the number of customer hardware MAC addresses learned by the Mobile Station.
31 This value must be configurable per Mobile Station and in real-time without reboots.

32 **4.4.1.6 Support/Optimization for TCP/IP**

33 The MAC protocol shall provide an efficient method of TCP acknowledgement
34 transmission in such a way that does not hinder the ability of a system to deliver peak
35 per-user capacity.

Deleted: <#>MAC Error Performance¶
The packet error rate (PER), after application of appropriate error correction mechanism (e.g., forward error correction) but before ARQ, delivered by the PHY layer to the MAC layer, must meet a requirement of 1% for tests conducted with 512 byte packets. The ratio of MAC protocol services becoming available to unavailable must e 99.9% of the time, provided the system and radios receive adequate power 100% of the time.¶
<#>Latency¶
Delays are derived from filters, frame alignment, time-slot interchange, switch processing, propagation, packetization, forward error correction, interleaving, contention/access, queue depths, or any other lapse in time associated with transmission on the wireless medium. Synchronous services, such as TCP applications or VoIP require short, predictable (i.e., constant) delay. ¶

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

1 In the event the Base Station terminates the last-mile IP session, the TCP stack must
2 support Explicit Congestion Notification as defined by RFC3168. At no time will the
3 Base Station block packets classified with the ECN flag.

4 **4.5 Layer 3+ Support**

5 The system must support both IPv4 and IPv6.

6 **4.5.1 OA&M Support**

7 The following values must be made available in real-time with redisplay intervals of no
8 less than 1000 msecs, with the option to be displayed in both cumulative and delta
9 modes:

10 Aggregate base station bytes served at each coding/modulation configuration

11 Correctable and uncorrectable block errors

12 Identity of specific Mobile Stations which exhibit a higher than average packet error rate

13 PHY/MAC/NET based usage consumption statistics per Mobile Station

14 Successful and failed service requests for both up and downlink directions

15 Unique number of active Mobile Stations, as well as which specific stations are active,
16 for both up and downlink directions

17 Number of ungraceful session disconnections

18 **4.5.2 Scheduler**

19 The AI specification shall not preclude proprietary scheduling algorithms, so long
20 as the standard control messages, data formats, and system constraints are
21 observed.

22 **4.5.3 MAC Complexity Measures**

23 To make the MBWA technology commercially feasible, it is necessary the complexity is minimized at the
24 MAC, consistent with the goals defined for the technologies. This section defines complexity measures to
25 be used in estimating MAC complexity. \

26 **4.6 User State Transitions**

27 The AI shall support multiple protocol states with fast and dynamic transitions among
28 them. It will provide efficient signaling schemes for allocating and de-allocating
29 resources, which may include logical in-band and/or out-of-band signaling, with respect
30 to resources allocated for end-user data. The AI shall support paging polling schemes for
31 idle terminals to promote power conservation for MTs.

1 **4.7 Resource Allocation**

2 The AI shall support fast resource assignment and release procedures on the uplink and
3 Duplexing – FDD & TDD

4 **5 References**

5

- 6 • 802.20 - PD-02: Mobile Broadband Wireless Access Systems: Approved PAR
7 (02/12/11)
- 8 • 802.20 - PD-03: Mobile Broadband Wireless Access Systems: Five Criteria (FINAL)
9 (02/11/13)
- 10 • C802.20-03/45r1: Desired Characteristics of Mobile Broadband Wireless Access Air
11 Interface ([Arif Ansari](#), [Steve Dennett](#), [Scott Migaldi](#), [Samir Kapoor](#), [John L. Fan](#),
12 [Joanne Wilson](#), [Reza Arefi](#), [Jim Mollenauer](#), [David S. James](#), [B. K. Lim](#), [K.](#)
13 [Murakami](#), [S. Kimura](#) (2003-05-12))
- 14 • C802.20-03/47r1: Terminology in the 802.20 PAR (Rev 1) ([Joanne Wilson](#), [Arif](#)
15 [Ansari](#), [Samir Kapoor](#), [Reza Arefi](#), [John L. Fan](#), [Alan Chickinsky](#), [George Iritz](#), [David](#)
16 [S. James](#), [B. K. Lim](#), [K. Murakami](#), [S. Kimura](#) (2003-05-12))

17

18

1 **Appendix A** **Definition of Terms and Concepts**

- 2 • *Active users* - An active user is a terminal that is registered with a cell and is using or
3 seeking to use air link resources to receive and/or transmit data within a short time
4 interval (e.g., within 100 ms).

- 5 • *Airlink MAC Frame RTT* - The round-trip time (RTT) over the airlink for a MAC data
6 frame is defined here to be the duration from when a data frame is received by the
7 physical layer of the transmitter to the time when an acknowledgment for that frame
8 is received by the transmitting station.

- 9 • *Bandwidth or Channel bandwidth* - Two suggested bandwidths are 1.25 MHz and 5
10 MHz, which correspond to the bandwidth of one channel (downlink or uplink) for
11 paired FDD spectrum.

- 12 • *Cell* - The term “cell” refers to one single-sector base station or to one sector of a
13 base station deployed with multiple sectors.

- 14 • *Cell sizes* – The maximum distance from the base station to the mobile terminal over
15 which an acceptable communication can maintained or before which a handoff would
16 be triggered determines the size of a cell.

- 17 • *Frequency Arrangements* – The frequency arrangement of the spectrum refers to its
18 allocation for paired or unpaired spectrum bands to provide for the use of Frequency-
19 Division Duplexing (FDD) or Time-Division Duplexing (TDD), respectively. The
20 PAR states that the 802.20 standard should support both these frequency
21 arrangements.

- 22 • *Interoperable* – Systems that conform to the 802.20 specifications should interoperate
23 with each other, e.g., regardless of manufacturer. (Note that this statement is limited
24 to systems that operate in accordance with the same frequency plan. It does not
25 suggest that an 802.20 TDD system would be interoperable with an 802.20 FDD
26 system.)

- 27 • *Licensed bands below 3.5 GHz* – This refers to bands that are allocated to the Mobile
28 Service and licensed for use by mobile cellular wireless systems operating below 3.5
29 GHz.

- 30 • *MAN* – Metropolitan Area Network.

- 31 • *Mobile Broadband Wireless Access systems* – This may be abbreviated as MBWA
32 and is used specifically to mean “802.20 systems” or systems compliant with an
33 802.20 standard.

- 34 • *Optimized for IP Data Transport* – Such an air interface is designed specifically for
35 carrying Internet Protocol (IP) data traffic efficiently. This optimization could involve

- 1 (but is not limited to) increasing the throughput, reducing the system resources
2 needed, decreasing the transmission latencies, etc.
- 3 • *Peak aggregate data rate per cell* – The peak aggregate data rate per cell is the total
4 data rate transmitted from (in the case of DL) or received by (in the case of UL) a
5 base station in a cell (or in a sector, in the case of a sectorized configuration),
6 summed over all mobile terminals that are simultaneously communicating with that
7 base station.

 - 8 • *Peak data rates per user (or peak user data rate)* – The peak data rate per user is the
9 highest theoretical data rate available to applications running over an 802.20 air
10 interface and assignable to a single mobile terminal. The peak data rate per user can
11 be determined from the combination of modulation constellation, coding rate and
12 symbol rate that yields the maximum data rate.

 - 13 • *Spectral efficiency* – Spectral efficiency is measured in terms of bits/s/Hz/cell. (In the
14 case of a sectorized configuration, spectral efficiency is given as bits/s/Hz/ sector.)

 - 15 • *Sustained spectral efficiency* – Sustained spectral efficiency is computed in a network
16 setting. It is defined as the ratio of the expected aggregate throughput (bits/sec) to all
17 users in an interior cell divided by the system bandwidth (Hz). The sustained spectral
18 efficiency calculation should assume that users are distributed uniformly throughout
19 the network and should include a specification of the minimum expected data
20 rate/user.

 - 21 • *Sustained user data rates* – Sustained user data rates refer to the typical data rates that
22 could be maintained by a user, over a period of time in a loaded system. The
23 evaluation of the sustained user data rate is generally a complicated calculation to be
24 determined that will involve consideration of typical channel models, environmental
25 and geographic scenarios, data traffic models and user distributions.

 - 26 • *Targets for 1.25 MHz channel bandwidth* – This is a reference bandwidth of 2 x 1.25
27 MHz for paired channels for FDD systems or a single 2.5 MHz channel for TDD
28 systems. This is established to provide a common basis for measuring the bandwidth-
29 dependent characteristics. The targets in the table indicated by the asterisk (*) are
30 those dependent on the channel bandwidth. Note that for larger bandwidths the
31 targets may scale proportionally with the bandwidth.

 - 32 • *Various vehicular mobility classes* – Recommendation ITU-R M.1034-1 establishes
33 the following mobility classes or broad categories for the relative speed between a
34 mobile and base station:
 - 35 ○ Stationary (0 km/h),
 - 36 ○ Pedestrian (up to 10 km/h)
 - 37 ○ Typical vehicular (up to 100 km/h)

- 1 ○ High speed vehicular (up to 500 km /h)
- 2 ○ Aeronautical (up to 1 500 km/h)
- 3 ○ Satellite (up to 27 000 km/h).
- 4

1 **Appendix B** **Unresolved issues**

2 Coexistence and Interference Resistance

3 Since MBWA technology will be operative in licensed bands some of which are currently being utilized by
4 other technologies, it is important that coexistence and interference issues be considered from the outset,
5 unlike the situation in unlicensed spectrum where there is much more freedom of design. Of particular
6 interest is adjacent channel interference; if MBWA is deployed adjacent to any of a number of
7 technologies, the development effort should evaluate potential effects.

8 Interference can be grouped as co-channel and adjacent channel interference; evaluation of all
9 combinations of technologies likely to be encountered should be part of the 802.20 processes.
10 Furthermore, 802.20 technology is described in the PAR to encompass both TDD and FDD techniques.
11 These should be evaluated separately, and requirements provided below.

12 • 5.1 Coexistence Scenarios

13 • FDD Deployments

14 • In this section, scenarios should be developed with 802.20 deployed as FDD,
15 following the FDD “rules” for each of the 2G and 3G technologies likely to be
16 encountered in practice.

17 •

18 • 802.20 and AMPS

19 • 802.20 and IS-95

20 • 802.20 and GSM

21 • 802.20 and LMR

22 • 802.20 and CDMA2000

23 • 802.20 and WCDMA

24 • 802.20 and 1xEVDO

25 • 802.20 and HSDPA

26 • 802.20 and 1xEV/DV

27 • 5.1.2 TDD Deployments

28 • In this section, scenarios should be developed with 802.20 deployed as TDD,
29 following any TDD “rules” for each of the 2G and 3G technologies likely to be
30 encountered in practice. Since the majority of existing technologies are deployed as

1 FDD solutions, some new ground is being explored here, and it will be necessary to
2 make sure that the 802.20 technology will not seriously impact the existing services.

3 • 802.20 and AMPS

4 • 802.20 and IS-95

5 • 802.20 and GSM

6 • 802.20 and LMR

7 • 802.20 and CDMA2000

8 • 802.20 and WCDMA

9 • 802.20 and 1xEVDO

10 • 802.20 and HSDPA

11 • 802.20 and 1xEV/DV

12 • Adjacent Channel Interference

13 • Definitions and Characteristics

14 • Requirements

15 • Co-channel Interference

16 • Definitions and Characteristics

17 • Requirements

18 • TDD Interference in Traditionally FDD Bands

19 • Since 802.20 is listed as being both TDD and FDD, it should be evaluated in a
20 scenario where TDD 802.20 technology is deployed in a traditionally FDD frequency
21 band. 802.20 should develop appropriate scenarios and requirements so that the new
22 technology meets all necessary coexistence requirements that may be placed upon it.

23 • Definition and Characteristics

24 • Requirements

25 Interworking: *The AI should support interworking with different wireless access systems,*
26 *e.g. wireless LAN, 3G, PAN, etc. Handoff from 802.20 to other technologies should be*
27 *considered and where applicable procedures for that hand-off shall be supported.*[Dan
28 Gal dgal@lucent.com]: This issue is quite **critical** to the successful deployment of 802.20 systems in

1 existing and future markets worldwide. The purpose of defining Coexistence requirements in this
2 document is to assure that 802.20 systems would not cause interference to or be susceptible to interference
3 from other wireless systems operating in the same geographical area. Detailed quantitative RF emission
4 limits need to be specified as well as received interference levels that the 802.20 receivers would have to
5 accept and mitigate.

6 **System Context Diagram needed**

7 This section presents a high-level context diagram of the MBWA technology, and how
8 such technology must “fit into” the overall infrastructure of the network. It shall include
9 data paths, wired network connectivity, AAA functionality as necessary, and inter-system
10 interfaces. Major System Interfaces shall be included in this diagram.

11

12 **5.1.1 MBWA-Specific Reference Model**

13 To facilitate a layered approach, the 802.20 specification shall incorporate a reference
14 partitioning model consisting of the MAC and PHY. This layered approach shall be
15 generally consistent with other IEEE 802 standards and shall remain generally within the
16 scope of other IEEE 802 standards as shown in figures 1 & 2.


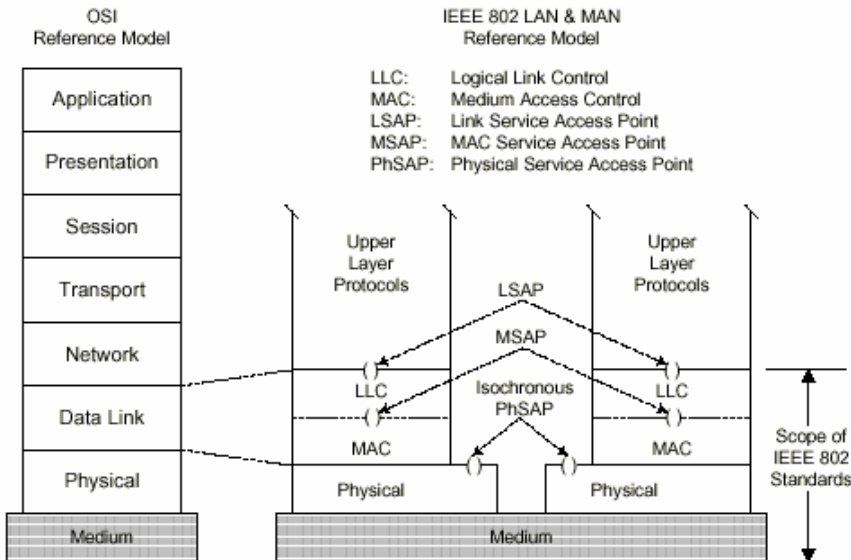


Figure 1—IEEE 802 RM for end stations (LAN&MAN/RM)

17

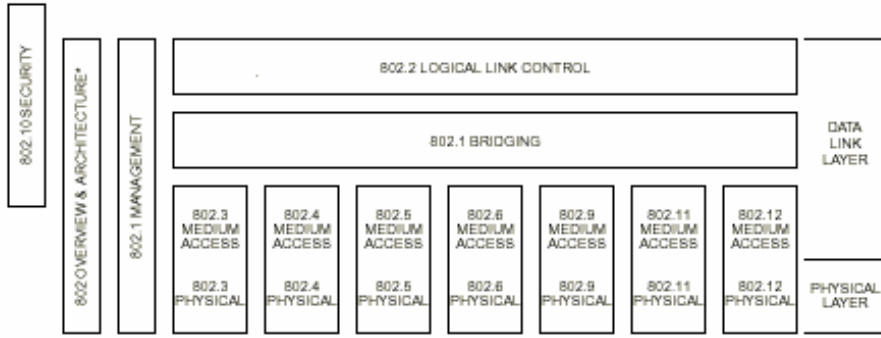

* Formerly IEEE Std 802.1A.

1

2

3 Call blocking is at higher level Sprint would like to see it included as a comment even
4 though the higher level will make the decision the MAC must be able to support the
5 higher level function.

6 When the bandwidth required for a call cannot be reserved, the system will provide signaling to support
7 call blocking.

8

9 2. Interworking

10 [Dan Gal dgal@lucent.com]: Interworking between 802.20 systems and other wireless systems is highly
11 desirable and may give it a competitive edge. Systems that have disparate physical layers can still
12 interwork via the higher protocol layers. Current interworking solutions exist for CDMA2000/802.11b and
13 for GSM-GPRS/802.11b. Multi-mode devices, such as 802.11b+802.11a or more recently, 802.11b/g are
14 now available. Existing applications (such as Windows XP mobility support) provide for transparent
15 roaming across systems, automatically handling the applications' reconfiguration so as to keep sessions
16 working seamlessly.

17 Building support for interworking in 802.20 – right from the first release of the standard – would add
18 significantly to its market appeal.

1 To aid the discussion in this document and in the 802.20 specifications, a straw man
2 Reference Partitioning of the 802.20 functionality is shown in Figure 1. This reference
3 partitioning model is similar to those used in other 802 groups.


4 The 802.20 reference model consists of two major functional layers, the Data Link Layer
5 (DLL) and the Physical Layer (PHY).

6 The Data Link Layer is functionally responsible for a mobile station’s method of gaining
7 access to the over-the-air resource. The Data Link Layer consists of the MAC Sub layer,
8 and the MAC Management Sub layer. The MAC Sub layer is responsible for the proper
9 formatting of data, as well as requesting access to the over-the-air resource. The MAC
10 Management Sub layer is responsible for provisioning of MAC Layer Parameters and the
11 extraction of MAC monitoring information, which can be of use in network management.

12 The Physical Layer consists of the Physical Layer Convergence Protocol, the Physical
13 Medium Dependent, and the Physical Layer Management Sub layers. The Physical
14 Layer Convergence Protocol Sub layer is responsible for the formatting of data received
15 from the MAC Sub layer into data objects suitable for over the air transmission, and for
16 the deformatting of data received by the station. The Physical Medium Dependent Sub
17 layer is responsible for the transmission and reception of data to/from the over-the-air
18 resource. The Physical Layer Management sub layer is responsible for provisioning of
19 the Physical Layer parameters, and for the extraction of PHY monitoring information that
20 can be of use in network management.

21

22

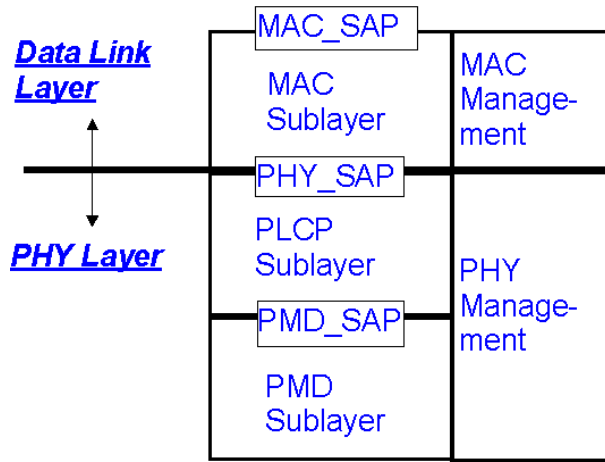

MAC_SAP: MAC Service Access Point
PHY_SAP: PHY Service Access Point
PLCP: PHY Layer Convergence Protocol, contains FEC
PMD: Physical Medium Dependent (radio)

- 1
- 2
- 3
- 4
- 5

Figure 1 – Reference partitioning

{May 29, 2003}

IEEE P802.20-PD<number>/V<number>

1

2

3