



Supporting Material for Comment 54


Tom Lindsay

Norm Swenson

11 October 2005




TWDP(100,50) and TWDP(14,5) for 26 LR Transceivers

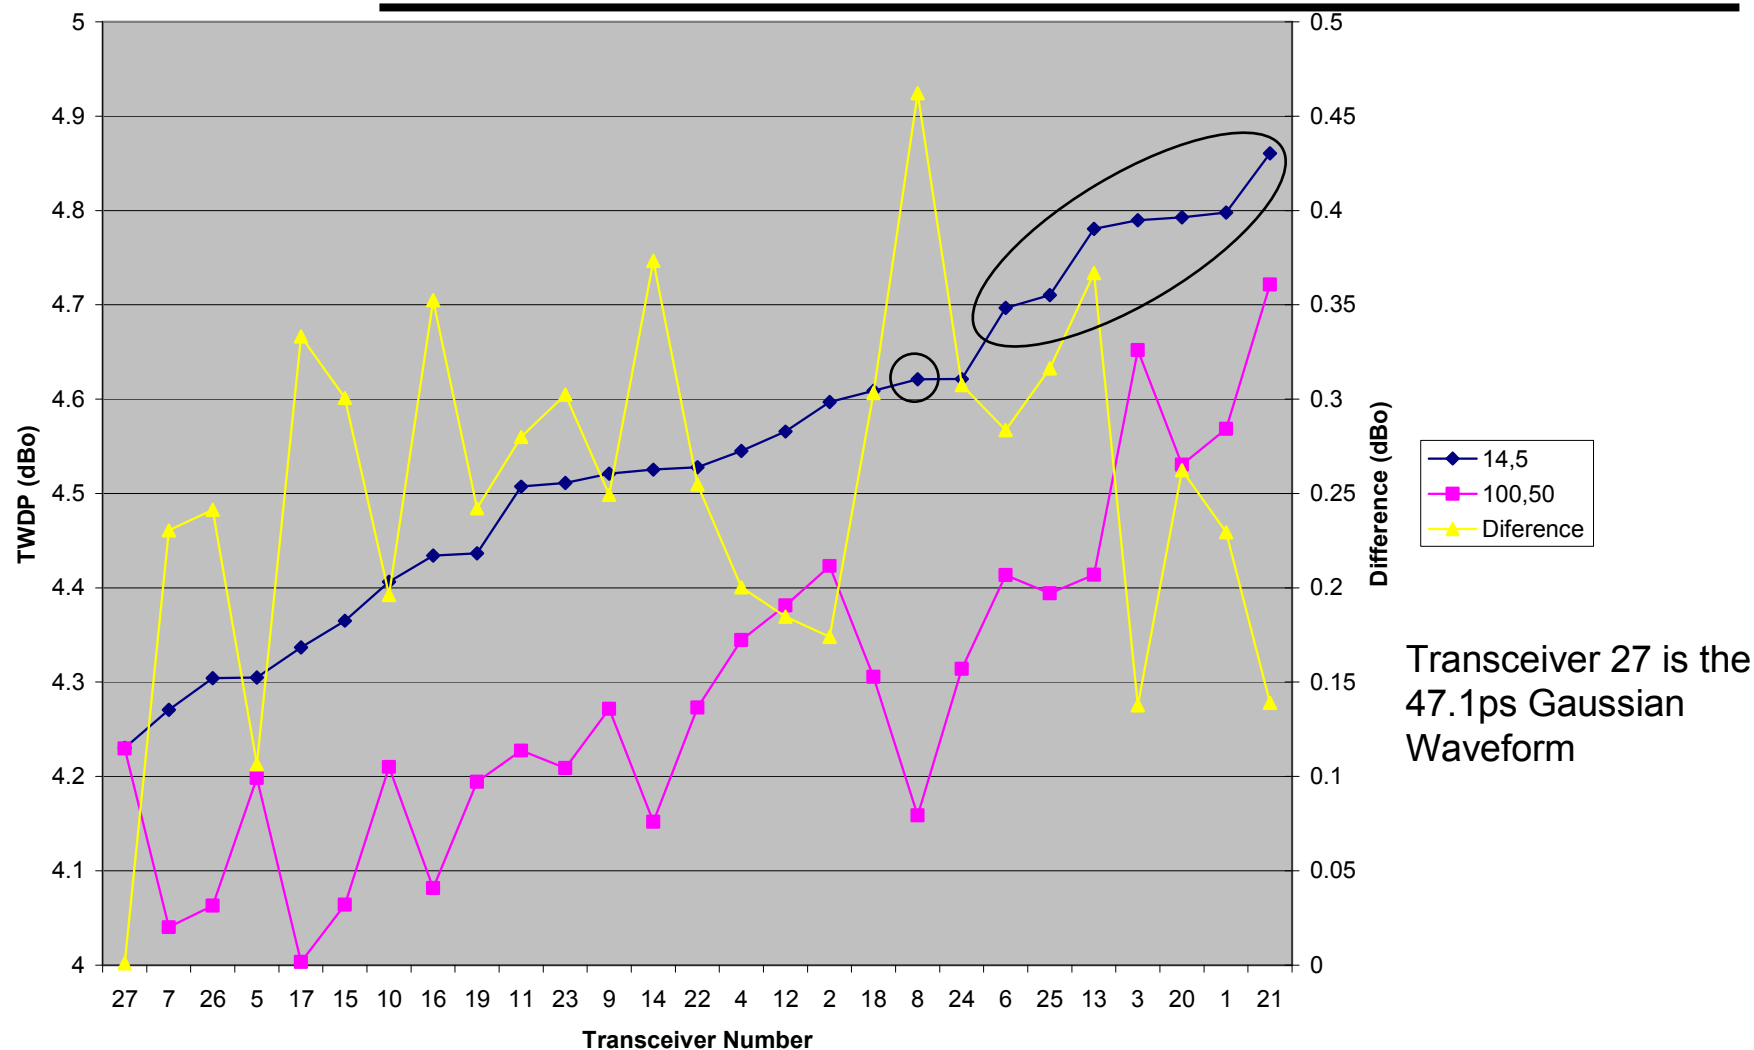


IEEE 802.3aq Corning, NY

Distribution of 26 TWDP(14,5) Values


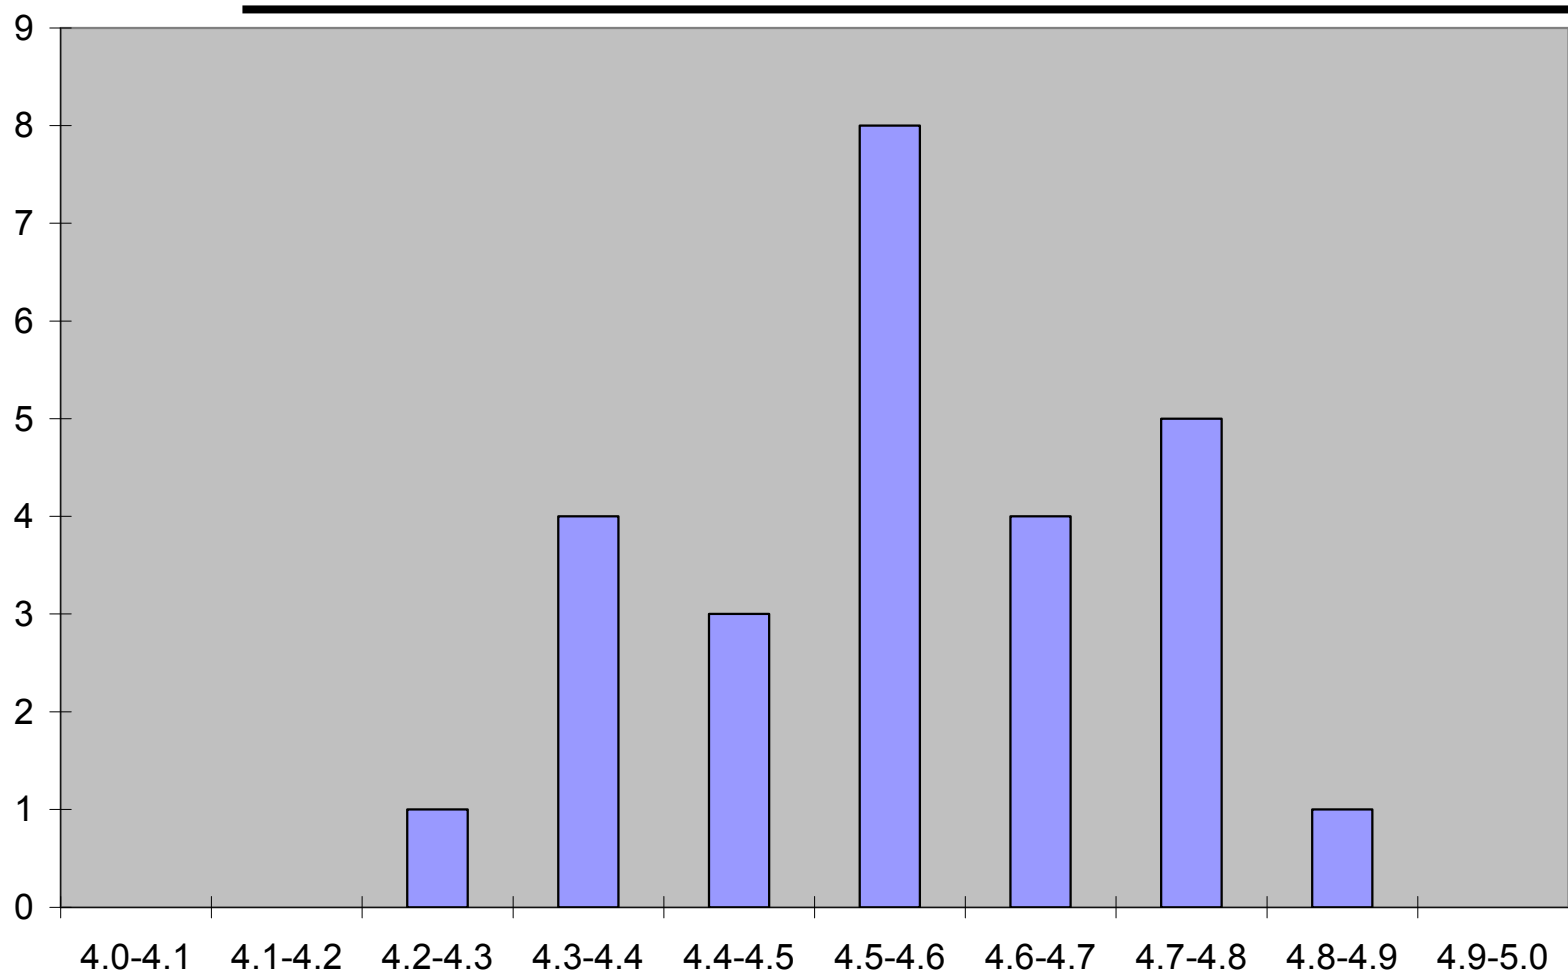


Mean = 4.56, σ = .17

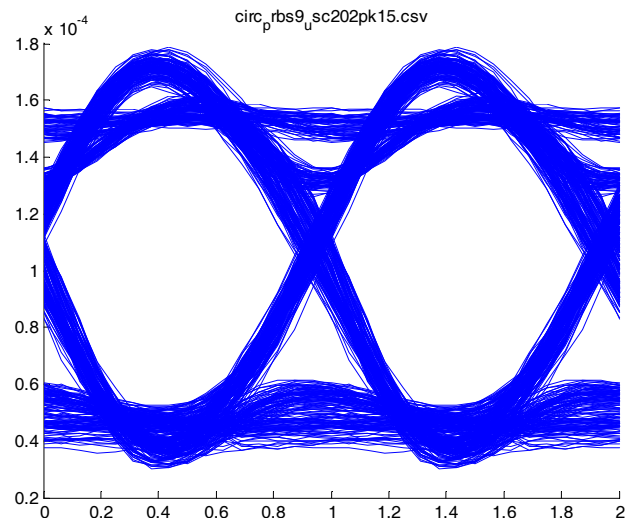


21 4.861


8 4.647

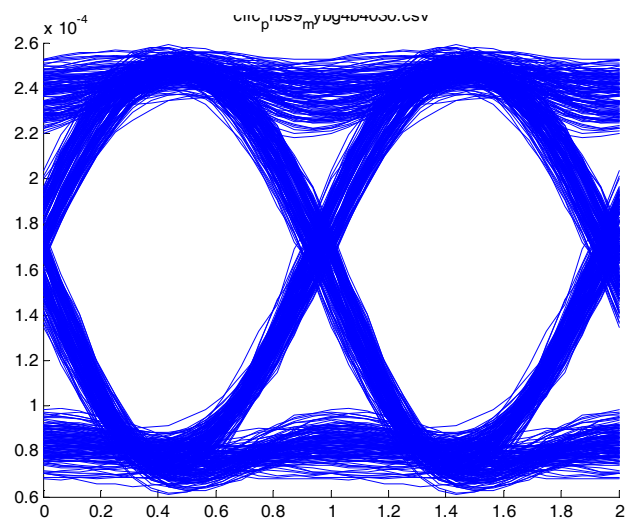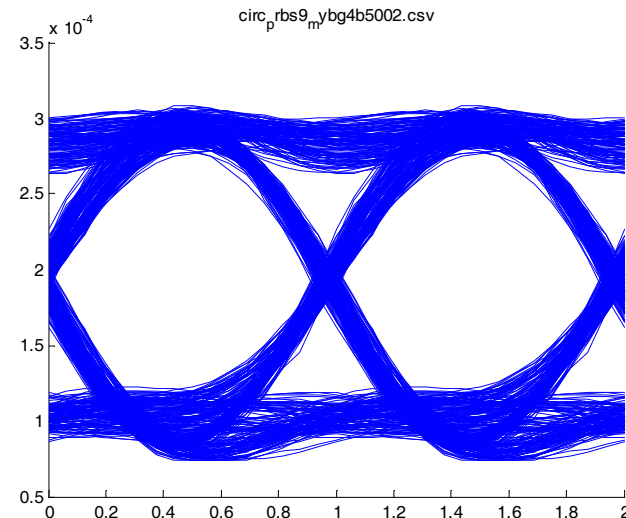

6 4.693



25 4.710

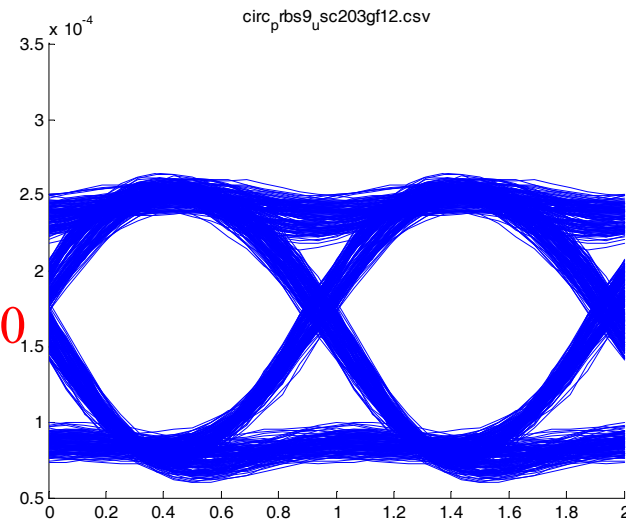

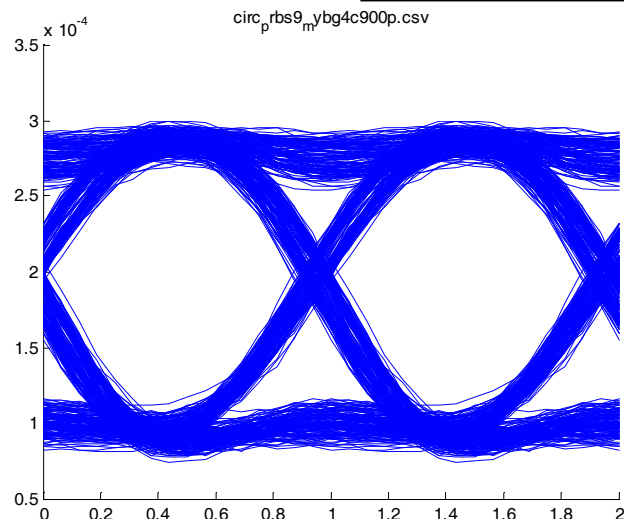


13 4.781

3 4.79

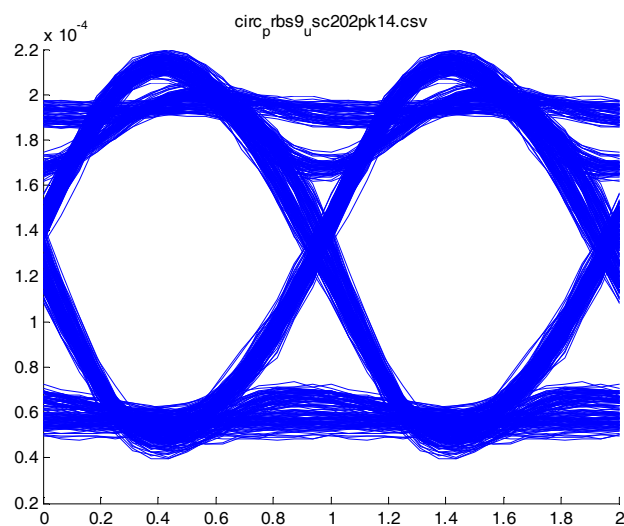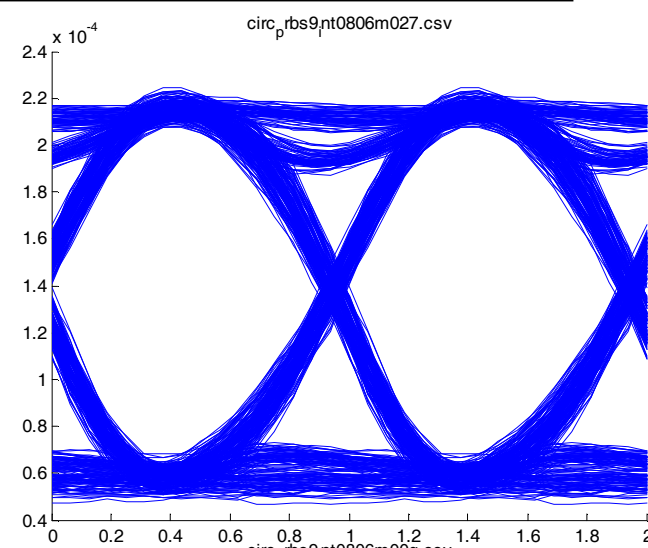


20 4.793

1 4.798

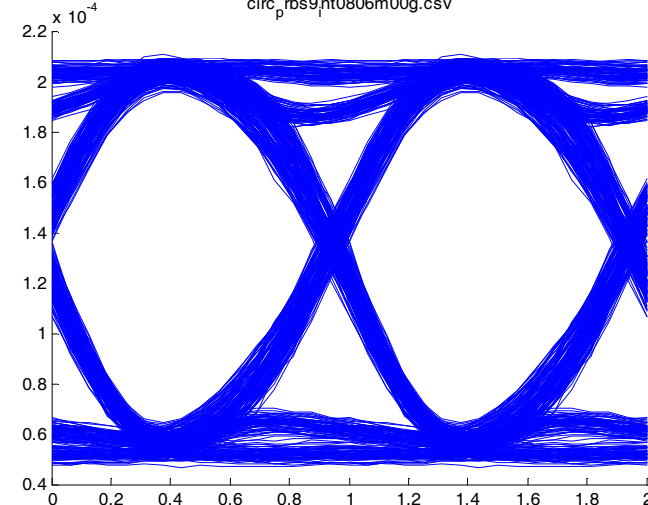

Finisar 1207-02 & -06

4.68

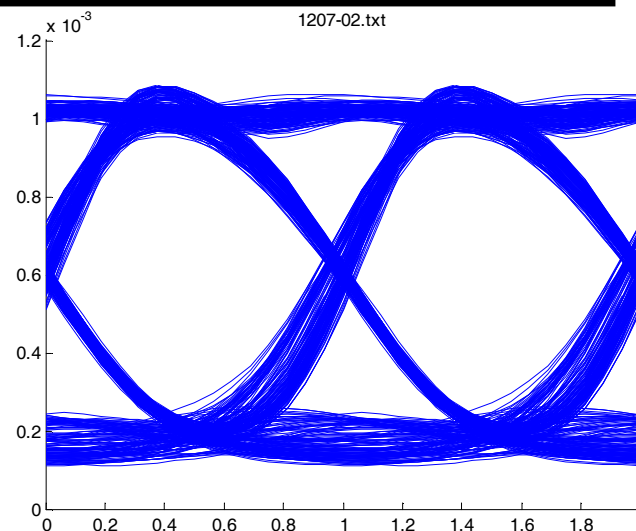

4.67

