

Update to Adopted 100GE 10km SMF PMD Baseline

IEEE 802.3ba Task Force
15-17 July 2008

Chris Cole - Finisar

Pete Anslow – Nortel


Jonathan King - Finisar

Finisar

Introduction

- Baseline Proposal for 100GE 10km SMF PMD objective was adopted at the May 802.3ba meeting (http://www.ieee802.org/3/ba/public/may08/cole_01_0508.pdf.)
- This presentation proposes updates to the Baseline Proposal.
- It lists refinements and additions required for a complete 802.3ba specification.
- All numbers should be viewed as subject to change as a result of continued discussion by 802.3ba participants, through Task Force review.
- Proposed updates to the Baseline Proposal:
 - Power Budget reformatted to 802.3ae format specification tables
 - Exact wavelength range set to 2.1nm (changed from tentative 2nm in May)
 - Link Power Budget increased by 0.6dB as per Q&A discussion of penalties during the May meeting
 - Min transmit values increased by 0.2dB and max sensitivity values increased by 0.4dB to match the 0.6dB Budget increase
 - Maximum transmitter and minimum receiver power values added
 - Eye mask, SMSR, ER, RIN, ORLT, TR, RL, 3dB BW limits added.

10km 1310nm EML (or 1310nm DML) 4x25G PMD

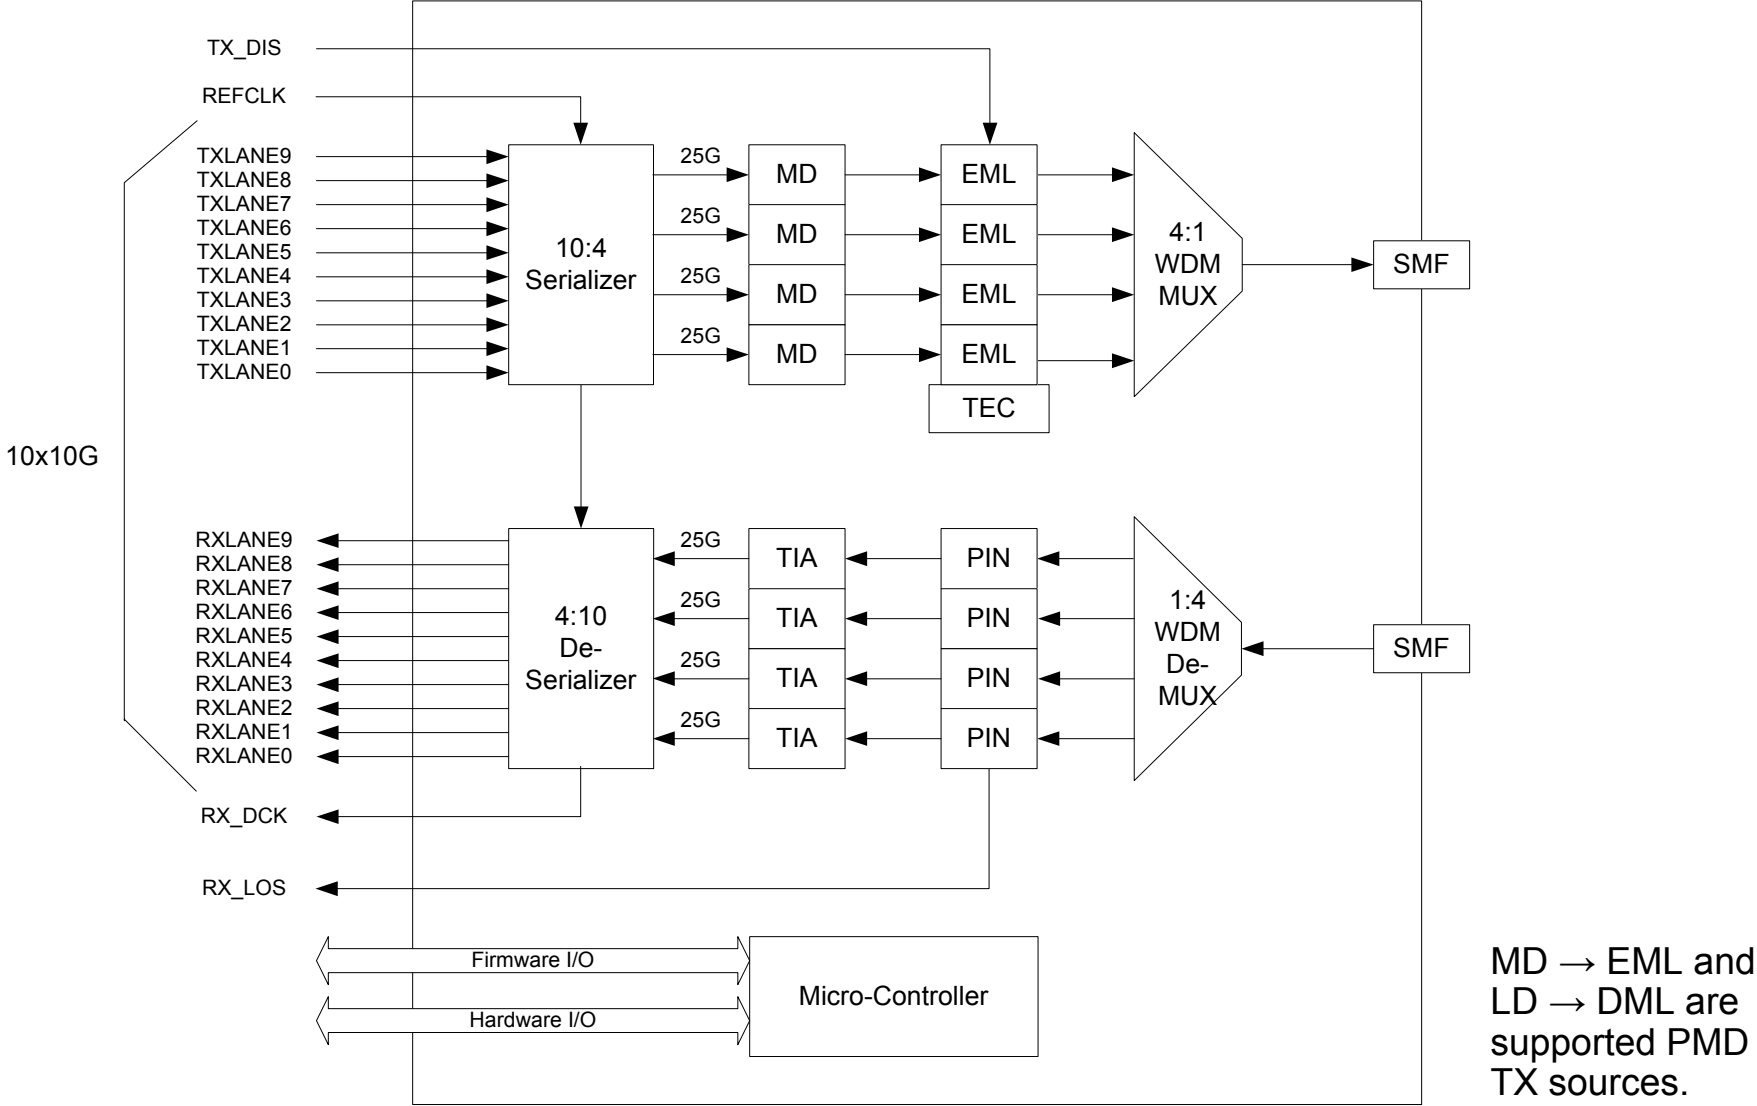

LAN WDM Baseline (-10nm) Grid

- ITU G.694.1 specification
- 800GHz spacing (193.1THz base)
- 4 wavelengths shifted by -10nm from minimum dispersion Grid
- Exact wavelengths: 1295.56 1300.05 1304.58 1309.14 nm
- Shorthand wavelengths: 1295, 1300, 1305, 1310 nm
- TX and RX wavelength range: 2.1 nm (2 nm shorthand)
- G.652 A&B 10km SMF worst dispersion and fiber loss
 - Max positive dispersion (1310nm) = 9.5ps/nm
 - Max negative dispersion (1295nm) = -28.5ps/nm
 - Max Loss (1310nm) = 4.2dB
 - Max Loss (1295nm) = 4.3dB

100GBASE-LR4 lane assignments

Lane	Center frequencies	Center wavelengths	Wavelength ranges
L ₀	231.4 THz	1295.56 nm	1294.53 – 1296.59 nm
L ₁	230.6 THz	1300.05 nm	1299.02 – 1301.09 nm
L ₂	229.8 THz	1304.58 nm	1303.54 – 1305.63 nm
L ₃	229.0 THz	1309.14 nm	1308.09 – 1310.19 nm

^a Wavelength ranges calculated for center frequencies $\pm 23\%$ of 800GHz spacing

100GBASE-LR4 transmit characteristics

Description	100GBASE-LR4	Unit
Signaling speed per lane	25.78125 ±100 ppm	GBd
Lane wavelengths (range)	1294.53 – 1296.59 1299.02 – 1301.09 1303.54 – 1305.63 1308.09 – 1310.19	nm
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3} ^a	TBD	
Side Mode Suppression Ratio (SMSR), (min)	30	dB
Total average launch power (max)	10	dBm
Average launch power per lane (max) ^b	4.0	dBm
Average launch power per lane (min) ^b	-3.0	dBm
Optical Modulation Amplitude (OMA), per lane (max)	4.0	dBm
Optical Modulation Amplitude (OMA), per lane (min)	0.0	dBm
Extinction Ratio (min)	4.0	dB
Average launch power of OFF transmitter, per lane (max)	-30	dBm
RIN ₁₂ OMA (max) ^c	-132	dB/Hz
Optical Return Loss Tolerance (max)	12	dB
Transmitter Reflectance (max) ^d	-12	dB

^a Tx eye mask spec to be specified as per eye mask methodology discussions

^b Informative

^c RIN is scaled by $10 \cdot \log(10/4)$ to maintain SNR out of transmitter

^d -12dB transmitter reflectance helps relax RX reflection spec

100GBASE-LR4 receive characteristics

Description	100GBASE-LR4	Unit
Signaling speed per lane	25.78125 ±100ppm	GBd
Lane wavelengths (range)	1294.53 – 1296.59 1299.02 – 1301.09 1303.54 – 1305.63 1308.09 – 1310.19	nm
Receive power, per lane (OMA) (max)	4.0	dBm
Average receive power, per lane (max) ^a	4.0	dBm
Average receive power, per lane (min) ^b	-9.3	dBm
Return loss (min) ^c	-26	dB
Receive sensitivity (OMA), per lane (max)	-8.1	dBm
Stressed receive sensitivity (OMA), per lane	-6.3	dBm
Vertical eye closure penalty, per lane	1.8	dB
Receive electrical 3 dB upper cutoff frequency, per lane (max)	31	GHz

^a The receiver shall tolerate, without damage, the Average Receive Power (max) plus 1 dB

^b Informative, equals min Tx OMA with infinite ER and max channel insertion loss

^c Prevents excess coherent interference due to Tx Rx reflectance

100GBASE-LR4 link power budget

Description	100GBASE-LR4	Unit
Power budget	8.1	dB
Operating distance	10	km
Channel insertion loss ^a	6.3	dB
Maximum Discrete Reflectance (max)	-26	dB
Allocation for penalties ^b	1.8 ^c	dB
Additional insertion loss allowed	0.0	dB

^a Channel insertion loss includes fiber and connector losses for worst case wavelength lane

^b Dispersion and other penalties for worst case wavelength lane

^c Assumes 0.8dB CD Penalty, 1.0dB Other Penalties.