

**P802.3ca  
PAR and Objectives  
[Proposed Revision]**

**July 2018**

# Previous Objectives

- ❑ Support subscriber access networks using point to multipoint topologies on optical fiber
- ❑ Provide specifications for physical layers operating over a single SMF strand and supporting symmetric and/or asymmetric MAC data rates of:
  - 25 Gb/s in downstream and less than or equal to 25 Gb/s in upstream
  - 50 Gb/s in downstream and less than or equal to 50 Gb/s in upstream
  - 100 Gb/s in downstream and less than or equal to 100 Gb/s in upstream
- ❑ PHY(s) to have a BER better than or equal to  $10^{-12}$  at the MAC/PLS service interface (or the frame loss ratio equivalent)
- ❑ Support coexistence with 10G-EPON
  - Optical power budgets to accommodate channel insertion losses equivalent to those supported by the 10G-EPON standard
  - Wavelength allocation allowing concurrent operation with 10G-EPON PHYs
- ❑ Wavelength allocation allowing concurrent operation of 25G-EPON and G-PON reduced wavelength set (1290nm-1330nm) PHYs

# Approved Modifications (in red)

- ❑ Support subscriber access networks using point-to-multipoint topologies on optical fiber
- ❑ Provide Physical Layer specifications that
  - Operate over a single SMF strand
  - Support symmetric and/or asymmetric MAC data rates of:
    - 25 Gb/s in downstream and less than or equal to 25 Gb/s in upstream (25G-EPON)
    - 50 Gb/s in downstream and less than or equal to 50 Gb/s in upstream (50G-EPON)
    - ~~100 Gb/s in downstream and less than or equal to 100 Gb/s in upstream (100G-EPON)~~
  - Have a BER better than or equal to  $10^{-12}$  at the MAC/PLS service interface (or the frame loss ratio equivalent)
  - Support coexistence with select legacy PON technologies
    - Optical power budgets to accommodate channel insertion losses equivalent to PR20 and PR30, as defined in Clause 75.
    - Wavelength allocation allowing concurrent operation with 10G-EPON, XG-PON1, and XGS-PON PHYs (1575nm-1580nm downstream, 1260nm-1280nm upstream)
    - Wavelength allocation allowing concurrent operation of 25G-EPON and G-PON reduced wavelength set (1480nm-1500nm downstream, 1290nm-1330nm upstream) PHYs

# Motion #17 from January 2018

- Approve changes to the p802.3ca objectives as shown on slide 3 of kramer\_3ca\_3b\_0118.pdf.
- (Technical,  $\geq 75\%$ )
- Moved: Glen Kramer
- Seconded: Alan Brown
- Y: 30    N: 0    A: 1

- Support symmetric and/or asymmetric MAC data rates of:
  - 25 Gb/s in downstream and ~~less than or equal to 10 Gb/s~~ or 25 Gb/s in upstream (25G-EPON)
  - 50 Gb/s in downstream and ~~less than or equal to 10 Gb/s~~, 25 Gb/s, or 50 Gb/s in upstream (50G-EPON)

- ❑ Support subscriber access networks using point-to-multipoint topologies on optical fiber
- ❑ Provide Physical Layer specifications that
  - Operate over a single SMF strand
  - Support symmetric and/or asymmetric MAC data rates of:
    - 25 Gb/s in downstream and 10 Gb/s or 25 Gb/s in upstream (25G-EPON)
    - 50 Gb/s in downstream and 10 Gb/s, 25 Gb/s, or 50 Gb/s in upstream (50G-EPON)
  - Have a BER better than or equal to  $10^{-12}$  at the MAC/PLS service interface (or the frame loss ratio equivalent)
  - Support coexistence with select legacy PON technologies
    - Optical power budgets to accommodate channel insertion losses equivalent to PR20 and PR30, as defined in Clause 75.
    - Wavelength allocation allowing concurrent operation with 10G-EPON, XG-PON1, and XGS-PON PHYs (1575nm-1580nm downstream, 1260nm-1280nm upstream)
    - Wavelength allocation allowing concurrent operation of 25G-EPON and G-PON reduced wavelength set (1480nm-1500nm downstream, 1290nm-1330nm upstream) PHYs

# Needed PAR Changes (1/2)

## P802.3ca

---

**Submitter Email:** [david\\_law@ieee.org](mailto:david_law@ieee.org)

**Type of Project:** Amendment to IEEE Standard 802.3-2015

**PAR Request Date:** 29-Sep-2015

**PAR Approval Date:** 05-Dec-2015

**PAR Expiration Date:** 31-Dec-2019

**Status:** PAR for an Amendment to an existing IEEE Standard

---

**1.1 Project Number:** P802.3ca

**1.2 Type of Document:** Standard

**1.3 Life Cycle:** Full Use

---

**2.1 Title:** Approved Draft Standard for Ethernet

**Amendment:** Physical Layer Specifications and Management Parameters for 25 Gb/s, 50 Gb/s, and 100 Gb/s Passive Optical Networks

---

**3.1 Working Group:** Ethernet Working Group (C/LM/WG802.3)

**Contact Information for Working Group Chair**

**Name:** David Law

**Email Address:** [david\\_law@ieee.org](mailto:david_law@ieee.org)

**Phone:** +44 1631 563729

**Contact Information for Working Group Vice-Chair**

**Name:** Adam Healey

**Email Address:** [adam.healey@avagotech.com](mailto:adam.healey@avagotech.com)

**Phone:** 6107123508

---

# Needed PAR Changes (2/2)

---

**4.1 Type of Ballot:** Individual

**4.2 Expected Date of submission of draft to the IEEE-SA for Initial Sponsor Ballot:** 07/2018

**4.3 Projected Completion Date for Submittal to RevCom:** 05/2019

---

**5.1 Approximate number of people expected to be actively involved in the development of this project:** 30

**5.2.a. Scope of the complete standard:** This standard defines Ethernet local area, access and metropolitan area networks. Ethernet is specified at selected speeds of operation; and uses a common media access control (MAC) specification and management information base (MIB). The Carrier Sense Multiple Access with Collision Detection (CSMA/CD) MAC protocol specifies shared medium (half duplex) operation, as well as full duplex operation. Speed specific Media Independent Interfaces (MIIs) provide an architectural and optional implementation interface to selected Physical Layer entities (PHY). The Physical Layer encodes frames for transmission and decodes received frames with the modulation specified for the speed of operation, transmission medium and supported link length. Other specified capabilities include: control and management protocols, and the provision of power over selected twisted pair PHY types.

**5.2.b. Scope of the project:** The scope of this project is to amend IEEE Std 802.3 to add physical layer specifications and management parameters for symmetric and/or asymmetric operation at 25 Gb/s, 50 Gb/s, and 100 Gb/s MAC data rates on point-to-multipoint passive optical networks with distance and split ratios consistent with those defined in IEEE Std 802.3-2015.

**5.3 Is the completion of this standard dependent upon the completion of another standard:** No

**5.4 Purpose:** This document will not include a purpose clause. **Changes in purpose:**


**5.5 Need for the Project:** The project is applicable to business and residential access environments. The project is needed to enable access network operators to provide advanced bandwidth-intensive services while reducing footprint of network equipment, simplifying service upgrades, reducing network upgrade cost, and reducing fiber deployment costs.

**5.6 Stakeholders for the Standard:** The stakeholders include access network operators, system suppliers, component suppliers, and subscribers.

---



## IEEE P802.3ca Timeline

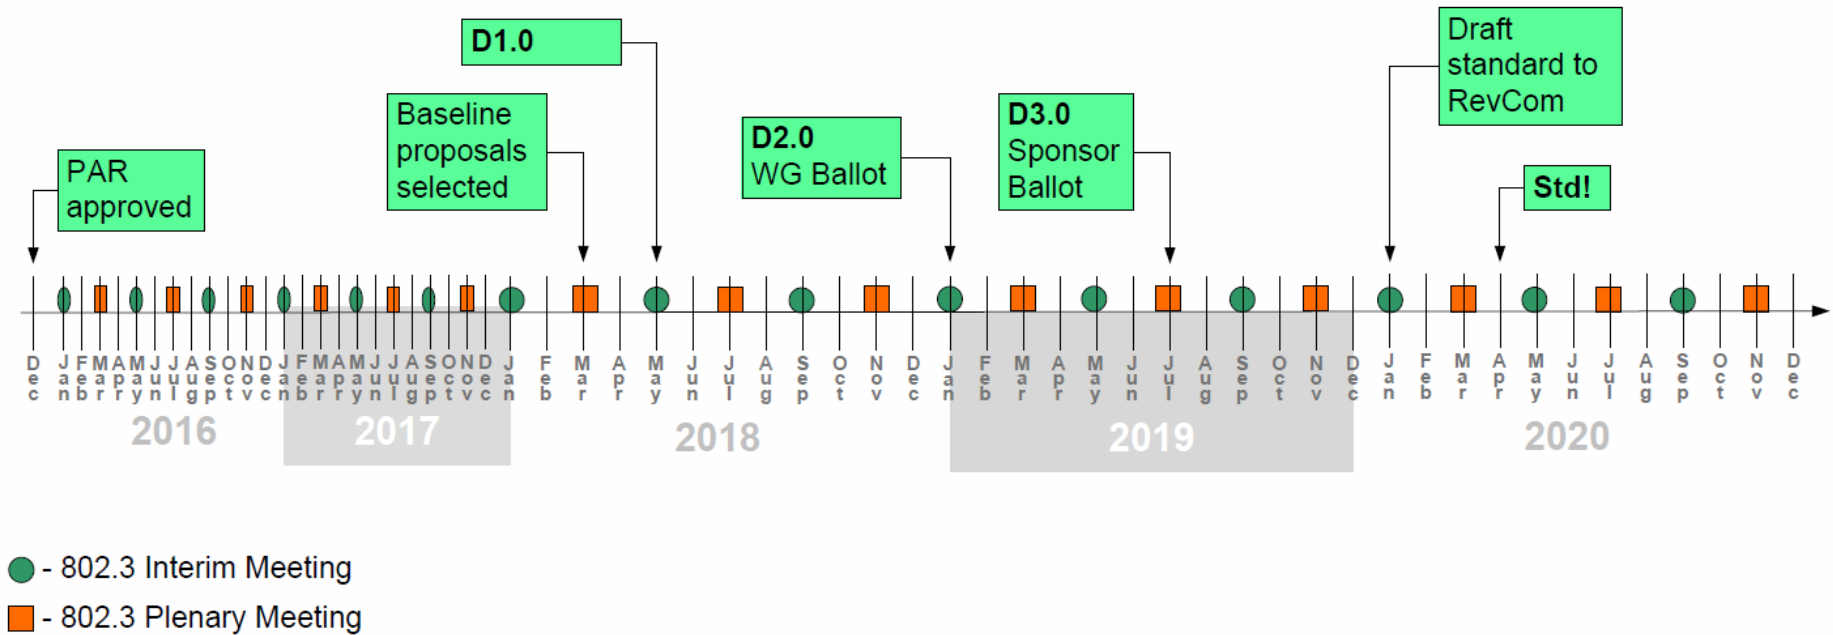

# Proposed PAR Changes

**PAR Expiration Date:** 31-Dec-~~2019~~2020

**2.1 Title** ~~Approved Draft~~ Standard for Ethernet Amendment:  
Physical Layer Specifications and Management  
Parameters for 25 Gb/s, ~~and~~ 50 Gb/s, ~~and~~ 100 Gb/s  
Passive Optical Networks

**4.2 Expected Date of submission of draft to the IEEE-SA  
for Initial Sponsor Ballot:** 07/~~2018~~2019

**4.3 Projected Completion Date for Submittal to RevCom:**  
~~05/2019~~ 01/2020

## 5.2.b. Scope of the project:

The scope of this project is to amend IEEE Std 802.3 to add physical layer specifications and management parameters for ~~symmetric and/or asymmetric operation at 25 Gb/s, 50 Gb/s, and 100 Gb/s MAC data rates on~~ point-to-multipoint passive optical networks ~~operating at 25 Gb/s or 50 Gb/s in the downstream direction and 10 Gb/s, 25 Gb/s, or 50 Gb/s in the upstream direction,~~ with distance and split ratios consistent with those defined in IEEE Std 802.3-2015.