

Proposed change to Figure 147-5 – PCS Transmit state diagram (part b)

Dayin XU

Rockwell Automation

Proposed Changes to Figure 147-5

- Figure 147-5, line 36, Page 173
- Comment #327
- Use XMIT_MAX_TIMER_done instead of XMIT_MAX_TIMER_donē
- Use UNJAB_TIMER_done instead of UNJAB_TIMER_donē
- Use !XMIT_MAX_TIMER_done instead of XMIT_MAX_TIMER_donē = FALSE
- Change ESD to GOOD_ESD condition from STD*!err to STD*!err*!XMIT_MAX_TIMER_done
- Change BAD_ESD to UNJAB_WAIT condition from STD* XMIT_MAX_TIMER_done to STD*!err*XMIT_MAX_TIMER_done

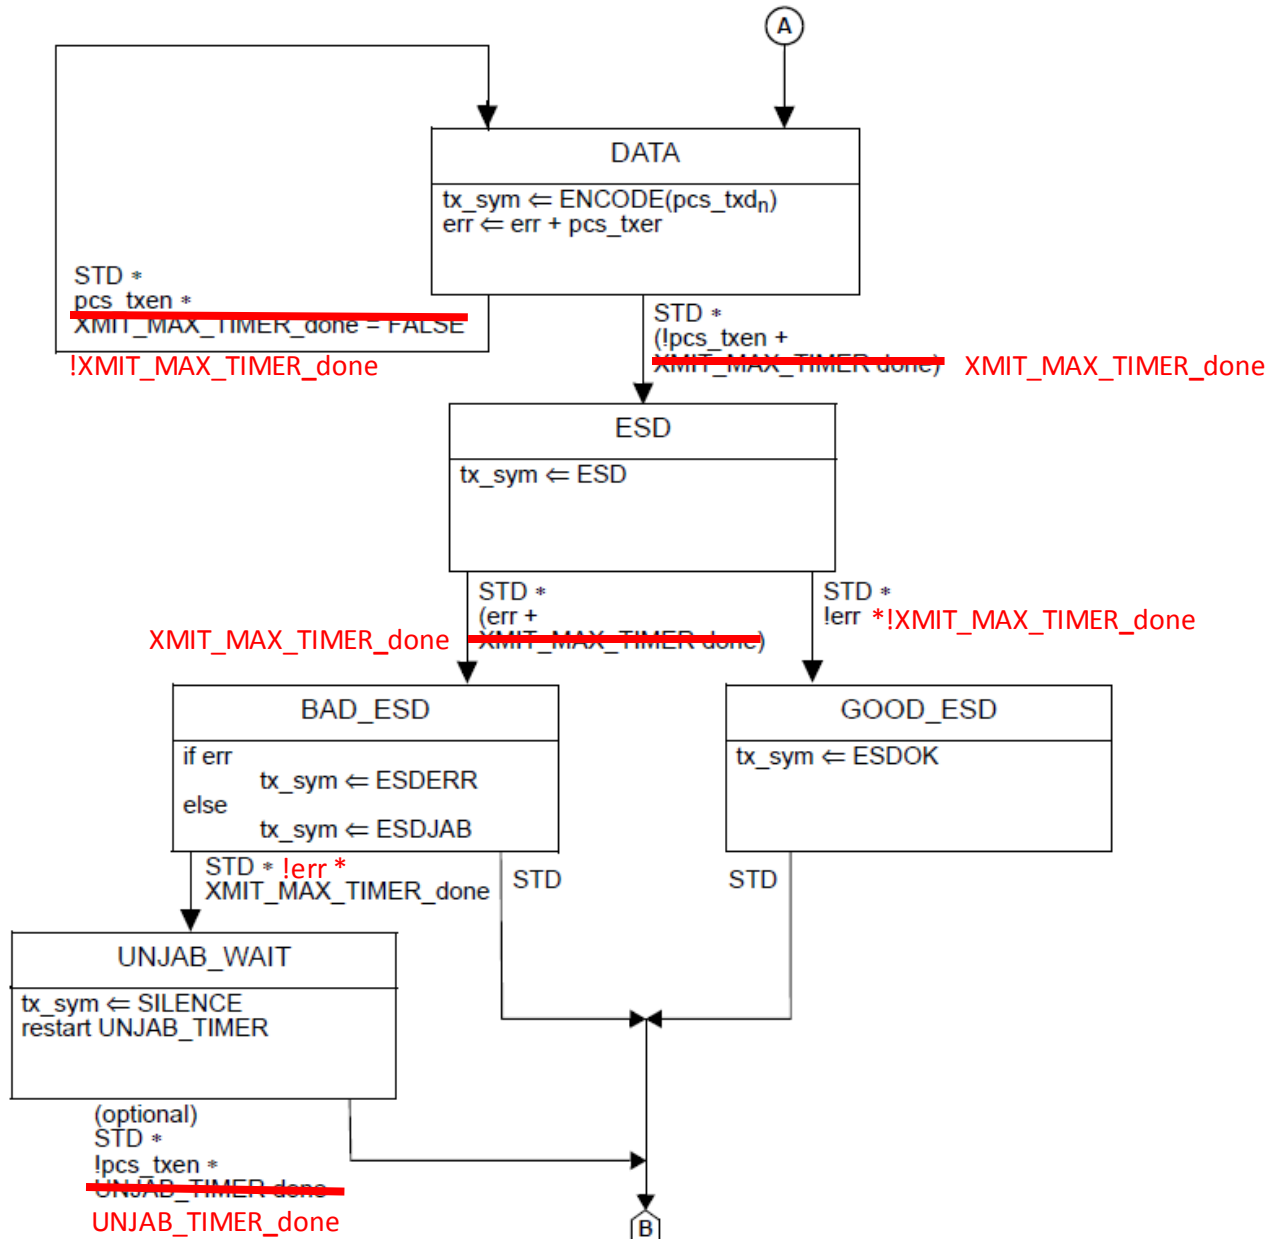


Figure 147-5—PCS Transmit state diagram (part b)