


COM 100G Revision History, Latest Feedback/Update and Configuration Spreadsheet

Richard Mellitz, Samtec

12-19-2018 IEEE 802.3 100 Gb/s, 200 Gb/s, and 400 Gb/s Electrical Interfaces Task Force

COM 2.57 12 mm & 30 mm package

- ❑ Reduce Syntax for Flex model (2 section)
- ❑ Latest package model fits

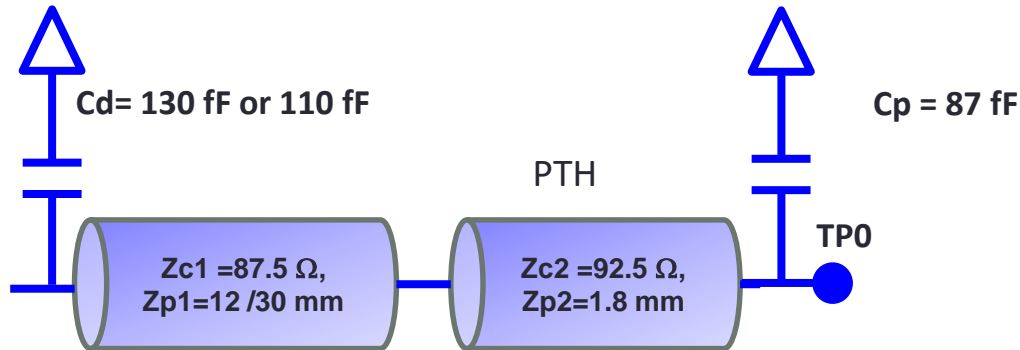

C_d	[1.1e-4 1.1e-4]	nF	[TX RX]
z_p select	[1 2]		[test cases to run]
z_p (TX)	[12 30; 1.8 1.8]	mm	[test cases]
z_p (NEXT)	[12 30; 1.8 1.8]	mm	[test cases]
z_p (FEXT)	[12 30; 1.8 1.8]	mm	[test cases]
z_p (RX)	[12 30; 1.8 1.8]	mm	[test cases]
C_p	[0.87e-4 0.87e-4]	nF	[TX RX]

Table 93A-3 parameters		
Parameter	Setting	Units
package_tl_gamma0_a1_a2	[0 0.0009909 0.0002772]	
package_tl_tau	6.1400E-03	ns/mm
package_Z_c	[87.5 87.5 ; 92.5 92.5]	Ohm

COM 2.57 updates

- ❑ optimize_fom function
 - Fix testing of maximum precursor value (Yasuo Hidaka)
 - Do not allow excessively large precursor taps
- ❑ Accept syntax for 2 segment line flex package model
 - This syntax will not working on older versions
- ❑ 3 starter configuration sheets
 - config_com_ieee8023_93a=100GEL-KR_DFE_121918.xls
 - config_com_ieee8023_93a=100GEL-CR_DFE_121918.xls
 - config_100GEL_C2M_4dBpkg_baseline_121918.xls
 - config_100GEL_C2M_4dBpkg_baseline_tp1a_121918.xls
- ❑ speed up in optimize FOM
- ❑ added code from Yasuo Hidaka for reading in parameters and printing out noise
- ❑ Improved extrapolation of channel with lower bandwidths in s21_to_impulse_DC from John Ewen
- ❑ In get_xtlk_noise in optimize_FOM: refine crosstalk accounting from John Ewen

Table of Contents

- COM 2.57
- Background
 - COM 2.40
 - COM 2.41
 - COM 2.50
 - COM 2.51
 - COM 2.52
 - COM 2.53

background

COM 2.40

IEEE P802.3ck July 25, 2018 Ad Hoc Meeting

http://www.ieee802.org/3/ck/public/adhoc/july25_18/mellitz_3ck_adhoc_01a_072518.pdf

Available for analysis

1. Zero Forced DFE
2. Quantized Forced DFE - **abandoned**
 - only produced COM offset
3. One DFE tap and a number of (Rx)FFE taps
 - Sum of taps = 1
4. One DFE tap and a number of (Rx)FFE taps with gain at cursor - **abandoned**
 - Same as 4 but gain at cursor
 - Gain not justified

Changed computation of crosstalk variance in `optimize_FOM()/get_xtlk_noise()` to be computed similar to ICN in the frequency domain.

- 5x speed-up for 7 or more crosstalk aggressor
- Original `get_xtlk_noise()` renamed to `get_xtlk_noise1()`

COM 2.41

IEEE P802.3ck August 15, 2018 Ad Hoc Meeting

http://www.ieee802.org/3/ck/public/adhoc/aug15_18/mellitz_3ck_adhoc_01_081518.pdf

1. Zero Forced DFE
2. Quantized Forced DFE - abandoned
3. One DFE tap and a number of (Rx)FFE taps
 - Cursor tap set to 1
4. One DFE tap and a number of (Rx)FFE taps with gain at cursor - abandoned

COM 2.50

Flexible Package Model added

- http://www.ieee802.org/3/ck/public/18_09/mellitz_3ck_01_0918.pdf

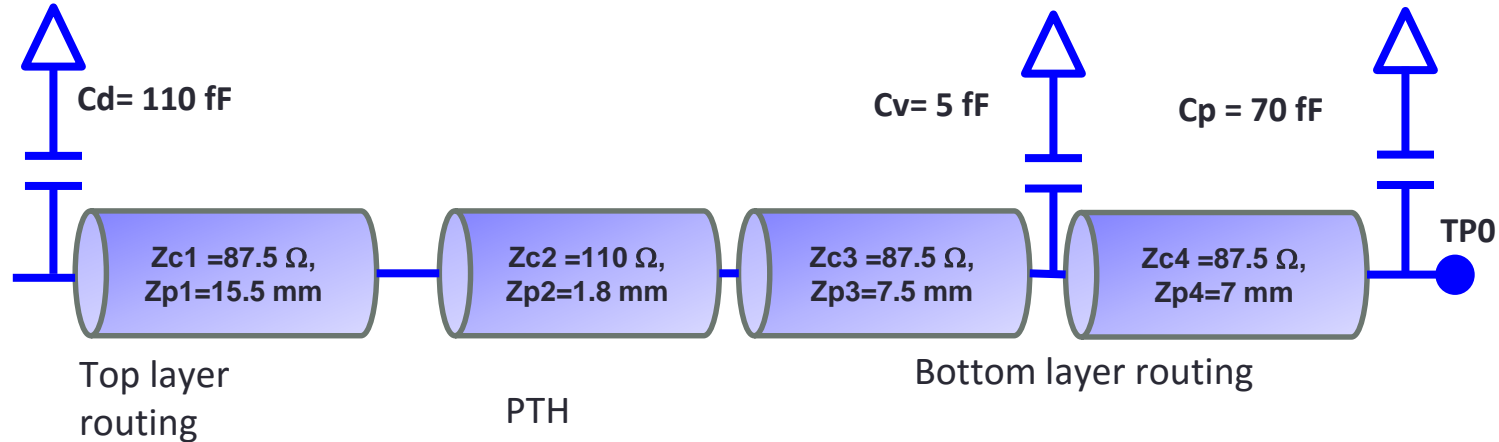


Table 93A-3 parameters		
Parameter	Setting	Units
package_tl_gamma0_a1_a2	[0 1.0404e-3 4.201e-4]	
package_tl_tau	6.325E-03	ns/mm
package_Z_c	[87.5 87.5 ; 110 110; 87.5 87.5; 87.5 87.5]	Ohm (Tx Rx)

C_d	[1.1e-4 1.1e-4]
z_p select	1
z_p (TX)	[15.5 20 30; 1.8 0 0; 7.5 0 0; 7 0 0]
z_p (NEXT)	[15.5 20 30; 1.8 0 0; 7.5 0 0; 7 0 0]
z_p (FEXT)	[15.5 20 30; 1.8 0 0; 7.5 0 0; 7 0 0]
z_p (RX)	[15.5 20 30; 1.8 0 0; 7.5 0 0; 7 0 0]
C_p	[0.7e-4 0.7e-4]
C_v	[5e-6 5e-6]

COM 2.51

IEEE P802.3ck OCT 03, 2018 Ad Hoc Meeting

http://www.ieee802.org/3/ck/public/adhoc/oct03_18/mellitz_3ck_adhoc_01_100318.pdf

- ❑ Rx FFE monotonic tap sensitivity refinement per wu_3ck_01_0918 in the IEEE P802.3ck July interim meeting

http://www.ieee802.org/3/ck/public/18_09/wu_3ck_01_0918.pdf

- ❑ Fixed RxFFE index modulus problem in force()


- John Ewen, Global Foundries

- ❑ Refined RxFFE post cursor forcing to the minimum of the post cursor pulse response value or the DFE1 b_{\max} limit.

- ❑ Removed minimum signal threshold for TDR and ERL computations

COM 2.52 12 mm & 30 mm package

- Flexible Package Model initial 12 mm / 30 mm suggestion
- From Liav Ben-Artzi, Marvell Israel Ltd

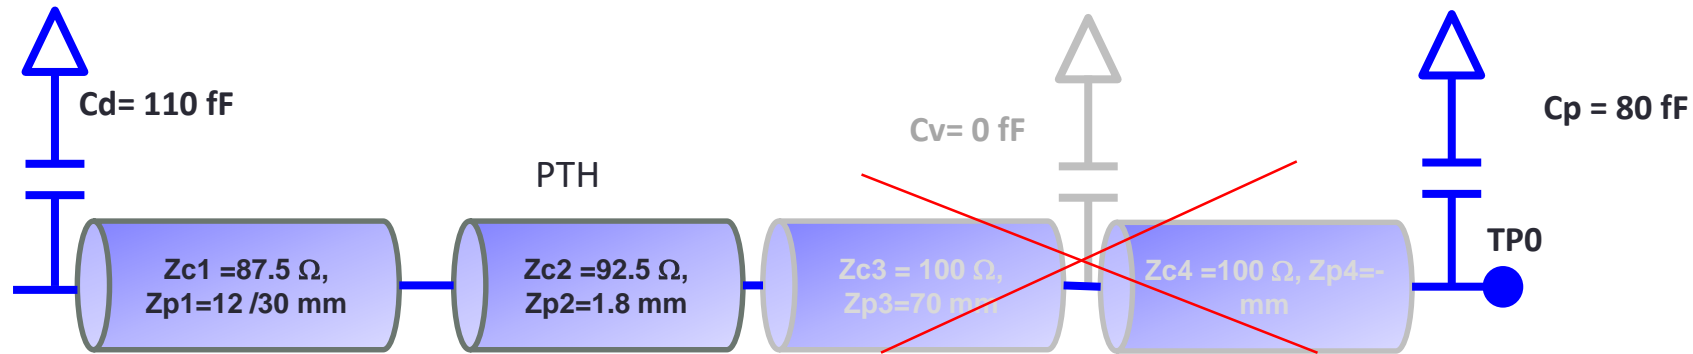

Parameter	Setting	Units
package_tl_gamma0_a1_a2	[0 0.0007901838 0.00050925]	
package_tl_tau	6.325E-03	ns/mm
package_Z_c	[87.5 87.5 ; 92.5 92.5 ; 100 100 ; 100 100]	Ohm

C_d	[1.1e-4 1.1e-4]
z_p select	[1 2]
z_p (TX)	[12 30; 1.8 1.8 ; 0 0 ; 0 0]
z_p (NEXT)	[12 30; 1.8 1.8 ; 0 0 ; 0 0]
z_p (FEXT)	[12 30; 1.8 1.8 ; 0 0 ; 0 0]
z_p (RX)	[12 30; 1.8 1.8 ; 0 0 ; 0 0]
C_p	[0.8e-4 0.8e-4]
C_v	[0 0]

COM 2.52 (test version only)

❑ add Rx FFE filter to receiver noise filter to eq. 93A-35 per request from Bill Kirkland, Semtech

- This basically adds Rx noise amplification from the Rx FFE

$$\sigma_N^2 = \eta_0 \int_0^{\infty} |H_r(f)H_{cif}(f)|^2 df$$

$H_{RXFFE}(f)$

❑ change ICN in get_xtlk_noise() to end at fb rather than fb/2. No impact observed because only used to compute the FOM to determine equalizer settings

❑ 12 mm and 30 mm package proposal spreadsheets

COM 2.53 just bug fixes

- ❑ Equivalent to 2.52 with a minor bug fix
- ❑ Keep some channels from crashing COM
 - Indexing fix in force routine
 - Open Kateri
- ❑ Remove bug when not FFE post cursors are present but FFE precursors are requested
 - Yasuo Hidaka

Thank You!