

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Service Primitives for Accounting	
Date Submitted	2005-07-11	
Source(s)	Yun Won Chung, PhD	yun.chung@etri.re.kr
	Jee Hyeon Na,	jhna@etri.re.kr
	Sang Ho Lee, PhD	leesh@etri.re.kr
	ETRI 161, Gajeong-dong, Yuseong-gu, Daejeon, 305-700, Korea	
		Voice: +82-42-860-5244 Fax: +82-42-861-1966
Re:	Call for Comment on P802.16g Baseline Document	
Abstract	This contribution proposes service primitives for accounting.	
Purpose	The document should be considered during the resolution of comments on the baseline document.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Service Primitives for Accounting

Yun Won Chung, Jee Hyeon Na, and Sang Ho Lee

ETRI

1. Problem Statement

Accounting for Internet service has been defined by IETF AAA Working Group, and Remote Authentication Dial In User Service (RADIUS) and Diameter protocols define accounting protocol between Access Network Node and Authentication, Authorization, and Accounting (AAA) Server. In order to provide accounting for Wireless Access Network based on IEEE 802.16 WMAN standard, either RADIUS or Diameter can be used, where a BS gathers Accounting information and this information should be delivered to an AAA server through either RADIUS or Diameter protocol. Contrary to the conventional wired network or WLAN, however, a mobile user in IEEE 802.16 WMAN can generate various service flows with different bandwidth requirements simultaneously, and accounting for each service flow should be supported. In this contribution, we propose service primitives for accounting which are exchanged through Management Service Access Point (M-SAP) of Management Plane specified in IEEE 802.16g baseline document, where accounting information for each service flow is gathered at a BS for each user or MSS.

2. Summary of the Proposed Remedy

In this contribution, we define two primitives for supporting accounting between BS and NCMS, which are summarized briefly in the following table.

Primitive	Direction	Primitive Contents
Accounting request	BS <-> NCMS	MSS MAC Address, Service Flow Identifier, Accounting Record Type, Accounting Record Number, Accounting Input Octets, Accounting Output Octets, Accounting Input Packets, Accounting Output Packets, Service Class Name, Service Flow Scheduling Type, Minimum Reserved Traffic Rate
Accounting response	BS <-> NCMS	MSS MAC Address, Service Flow Identifier, Result Code, Accounting Record Type, Accounting Record Number, Accounting Input Octets, Accounting Output Octets, Accounting Input Packets, Accounting Output Packets, Service Class Name, Service Flow Scheduling Type, Minimum Reserved Traffic Rate,

Figure 1 shows an example procedure for accounting message transfer. Accounting for a mobile user is initiated after Network Entry procedure and Accounting request message is delivered to an NCMS in order to inform the start of accounting information gathering. Accounting for service flows is initiated after Dynamic Service Addition (DSA) and Accounting request message is delivered to an NCMS in order to inform the start of accounting information gathering, too. If Dynamic Service Deletion (DSD) is performed, accounting information gathering for the service flow is terminated and the gathered accounting information is transferred to the NCMS. If a mobile user or an MSS deregisters, accounting

information gathering for the mobile user or MSS is terminated and the gathered accounting information is transferred to an NCMS, too. At the start of accounting information gathering, Interim Timer value is downloaded from the NCMS, and accounting information is periodically gathered based on the Interim Timer value. Thus, multiple Interim Records can be generated between the start and the termination of accounting.

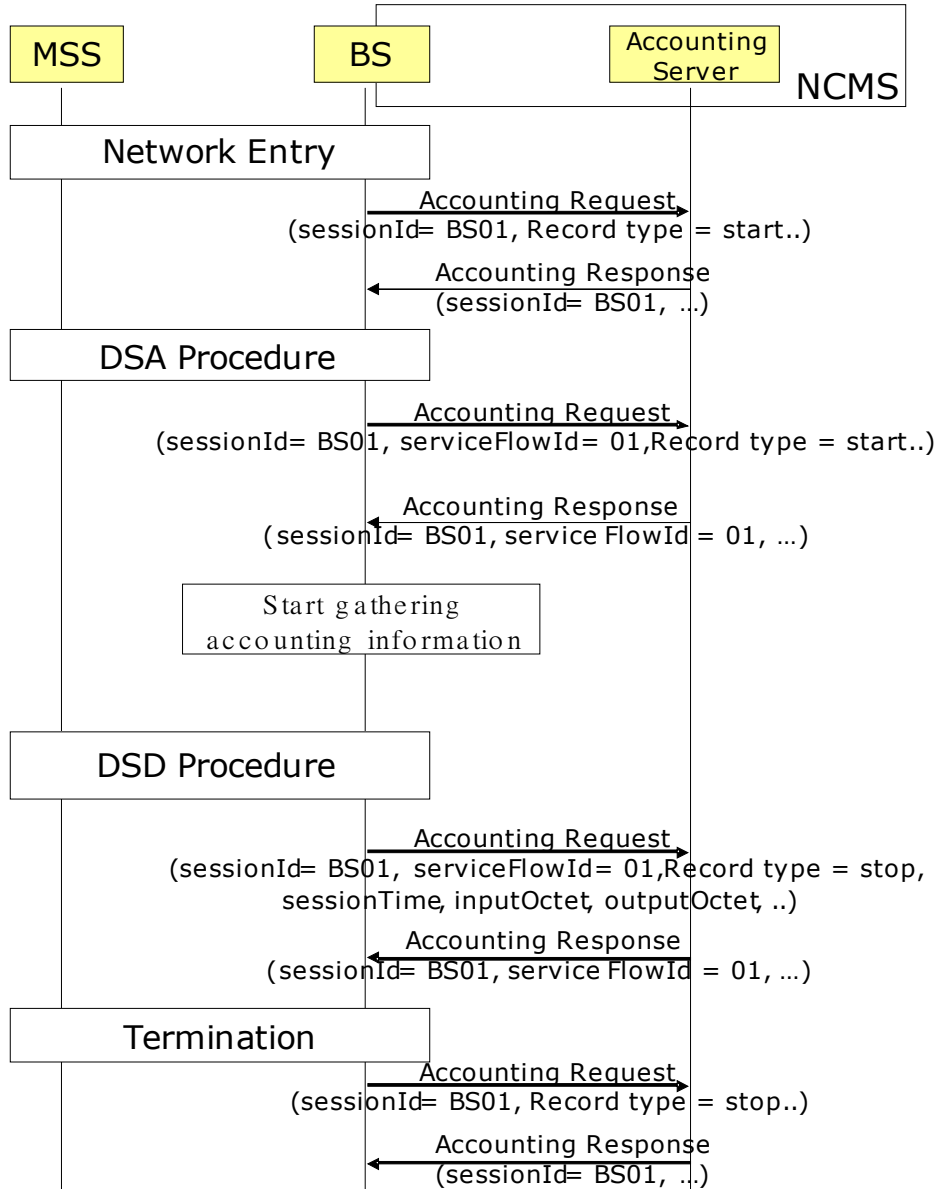


Fig. 1 - An Example Procedure for Accounting Message Transfer

In this contribution, we define Accounting request and Accounting response primitives in order to perform Accounting, and illustrate the usage of the primitives initiated by both BS and NCMS, as shown in Figs. 2 and 3.

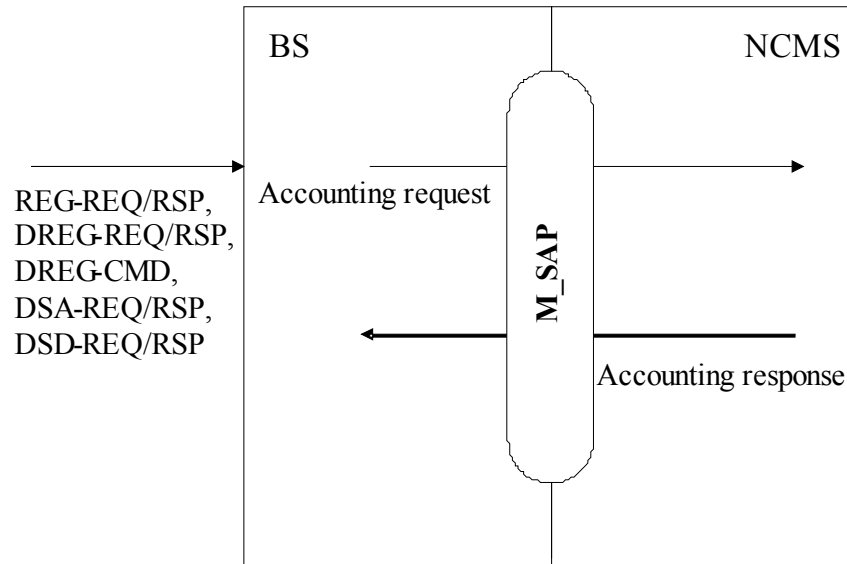


Fig. 2 - Accounting Primitive Initiated by BS

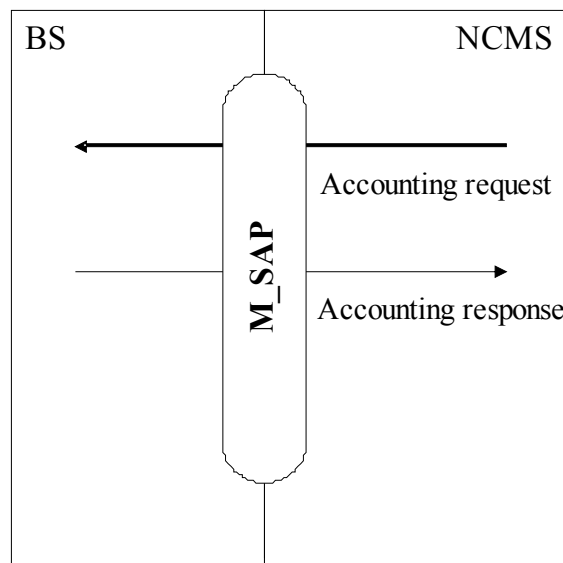


Fig. 3 - Accounting Primitive Initiated by NCMS

Accounting attributes in Accounting request and Accounting response are basically based on the attributes defined in RADIUS or Diameter, and new accounting attributes such as Service Flow Identifier, Service Class Name, Service Flow Scheduling Type, and Minimum Reserved Traffic Rate are additionally defined for IEEE802.16 WMAN specific application. Thus, the proposed accounting can accommodate various services characteristics of IEEE 802.16 WMAN.

Proposed Text Changes

[Modify section 14.5.3 as follow]

14.5.3 Accounting Management

Accounting in IEEE 802.16g is basically based on IETF RADIUS and Diameter protocols. Accounting information can be gathered for each user first. Since each user can have multiple connections at the same time, accounting information for each connection for a user should be gathered for more appropriate accounting. Thus, IEEE 802.16 based WMAN standard recommends accounting for both basic user connection and services used. Accounting for basic user connection is initiated when the user registers at the network and terminated when the user deregisters from the network. On the other hand, accounting for service is initiated at the dynamic service addition (DSA) instant of a service and terminated at the dynamic service deletion (DSD) instant of the service. Accounting attributes for a user connection can use currently defined accounting attributes in either RADIUS or Diameter protocol.

14.5.3.1 Accounting Procedure

Accounting primitives consists of Accounting request and Accounting response, as shown in Figs. 4 and 5. Accounting attributes in Accounting request and Accounting response are basically based on the attributes defined in RADIUS or Diameter, and new accounting attributes such as Service Flow Identifier, Service Class Name, Service Flow Scheduling Type, and Minimum Reserved Traffic Rate are additionally defined for IEEE802.16 WMAN specific application. Thus, the proposed accounting can accommodate various services characteristics of IEEE 802.16 WMAN.

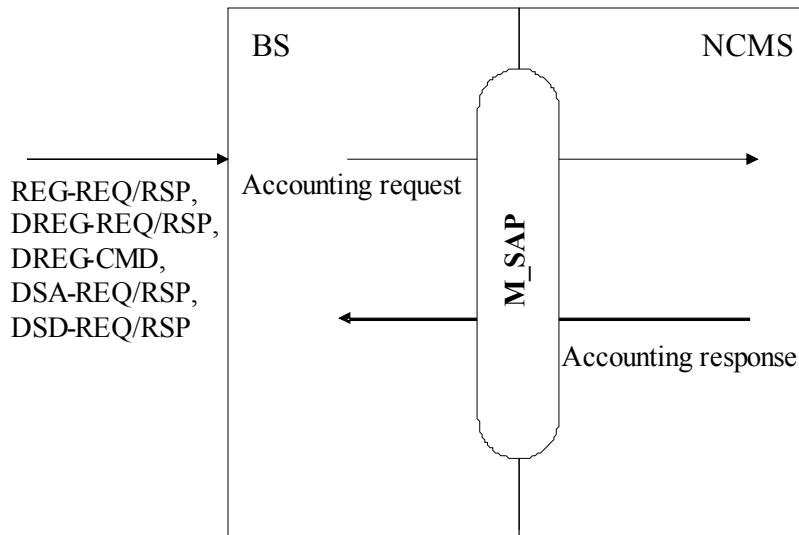


Fig.4 - Accounting Primitive Initiated by BS

Fig.5 - Accounting Primitive Initiated by NCMS

14.5.3.2 Service Primitives for Accounting Management

14.5.3.2.1 Accounting request

14.5.3.2.1.1 Function

This primitive is issued by a BS to inform an NCMS of accounting information for user connection after Registration request/response (REG-REQ/RSP) or Deregistration command (DREG-CMD) of an MSS. Also, it is issued by a BS to inform an NCMS of accounting information for service of a user after DSA or DSD procedure. This primitive may be generated periodically for each interim interval value by an NCMS, where the interim interval is downloaded from authentication, authorization, and accounting (AAA) server when the service is initiated when if an NCMS, acting as AAA server, requires to do so.

14.5.3.2.1.2 Semantics of the service primitive

The parameters of the primitives are as follows:

Accounting request

(
 MSS MAC Address
 Service Flow Identifier
 Accounting Record Type
 Accounting Record Number

Accounting Input Octets
 Accounting Output Octets
 Accounting Input Packets
 Accounting Output Packets
 Accounting Session Time
 Service Class Name
 Service Flow Scheduling Type
 Minimum Reserved Traffic Rate

)

MSS MAC Address

48-bit MAC address which will identify MSS

Service Flow identifier

32-bit service flow identifier which will identify service flows of MSS

Accounting Record Type

The type of accounting record being sent and EVENT_RECORD, START_RECORD, INTERIM_RECORD, and STOP_RECORD are currently defined. An Event Record is used to indicate that a one-time event has occurred (meaning that the start and end of the event are simultaneous). A Start Record is used to initiate an accounting session and contains accounting information that is relevant to the initiation of the session. An Interim Record contains cumulative accounting information for an existing accounting session. A Stop Record is sent to terminate an accounting session and contains cumulative accounting information relevant to the existing session.

Accounting Record Number

Identifies accounting record within one session

Accounting Input Octets

The number of octets received from the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD

Accounting Output Octets

The number of octets sent to the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD

Accounting Input Packets

The number of packets received from the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD.

Accounting Output Packets

The number of packets sent to the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD

Service Class Name

2 ~ 128 Byte ASCII character which is given by DSA-REQ/RSP

Service Flow Scheduling Type

Scheduling type of service flow (i.e., BE, nrtPS, rtPS, UGS) given after DSA procedure

Minimum Reserved Traffic Rate

32-bit minimum reserved traffic rate given after DSA procedure

14.5.3.2.1.3 When generated

This primitive is generated at a BS when an MSS enters a network or terminates to access a network, or when an MSS starts or stops dynamic services. Also, it is generated at an NCMS periodically based on interim interval.

14.5.3.2.1.4 Effect of receipt

If this primitive is generated by a BS, it is transformed into either RADIUS or Diameter message and sent to an Accounting Server. On the other hand, if this primitive is generated by an NCMS, the BS transfers gathered accounting information to the NCMS using Accounting response primitive.

14.5.3.2.1 Accounting response

14.5.3.2.1.1 Function

This primitive is issued by an NCMS or a BS to respond to Account request .

14.5.3.2.1.2 Semantics of the service primitive

The parameters of the primitives are as follows:

Accounting response

```
(
    MSS MAC Address
    Service Flow Identifier
    Result Code
    Accounting Record Type
    Accounting Record Number
    Accounting Input Octets
    Accounting Output Octets
    Accounting Input Packets
    Accounting Output Packets
    Accounting Session Time
    Service Class Name
    Service Flow Scheduling Type
    Minimum Reserved Traffic Rate
```

)

MSS MAC Address

48-bit MAC address which will identify MSS

MSS IP Address

Either 32-bit or 128-bit IP address which is allocated to MSS

Service Flow identifier

32-bit service flow identifier which will identify service flows of MSS

Result Code

The result of accounting request

Accounting Record Type

The type of accounting record being sent and `EVENT_RECORD`, `START_RECORD`, `INTERIM_RECORD`, and `STOP_RECORD` are currently defined. An Event Record is used to indicate that a one-time event has occurred (meaning that the start and end of the event are simultaneous). A Start Record is used to initiate an accounting session and contains accounting information that is relevant to the initiation of the session. An Interim Record contains

cumulative accounting information for an existing accounting session. A Stop Record is sent to terminate an accounting session and contains cumulative accounting information relevant to the existing session.

Accounting Record Number

Identifies accounting record within one session

Accounting Input Octets

The number of octets received from the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD

Accounting Output Octets

The number of octets sent to the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD

Accounting Input Packets

The number of packets received from the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD.

Accounting Output Packets

The number of packets sent to the MSS during the session and can only be present with an Accounting Record Type of INTERIM_RECORD or STOP_RECORD

Service Class Name

2 ~ 128 Byte ASCII character which is given by DSA-REQ/RSP

Service Flow Scheduling Type

Scheduling type of service flow (i.e., BE, nrtPS, rtPS, UGS) given after DSA procedure

Minimum Reserved Traffic Rate

32-bit minimum reserved traffic rate given after DSA procedure

14.5.3.2.1.3 When generated

This primitive is generated at either an NCMS or a BS to respond Account request.

14.5.3.2.1.4 Effect of receipt

Either a BS or NCMS receives the Accounting response. If an NCMS receives the Accounting response, it transforms this primitive into either RADIUS or Diameter message and sends it to Accounting Server.

References

- [1] IEEE 802.16e/D9
- [2] IEEE 802.16g-04/03r2, "Baseline Document – P802.16g Management Plane Procedures and Services"
- [3] IEEE Std 802-16-2004
- [4] IETF RFC 2865, "RADIUS," June 2000
- [4] IETF RFC 2866, "RADIUS Accounting," June 2000
- [5] IETF RFC 3588, "Diameter Base Protocol," Sep. 2003.