

Measured ATCA Backplane Channels


AUG/12/11

wolfgang.meier@emerson.com

armin.jacht@emerson.com



Measurement Setup





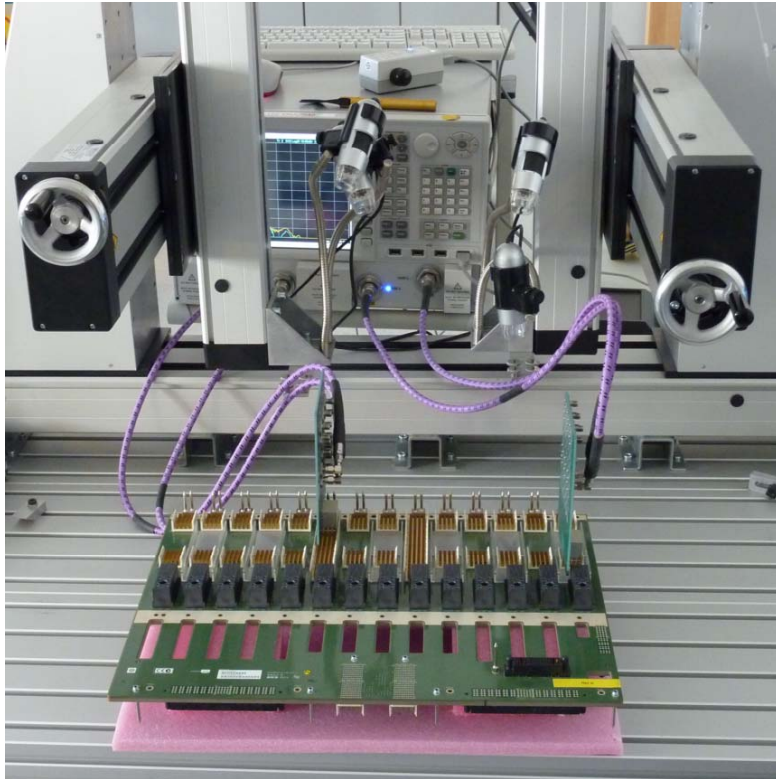


- **Agilent N5242A**
 - Port 1 -> Tx+
 - Port 2 -> Rx+
 - Port 3 -> Tx-
 - Port 4 -> Rx-
- **BACKPLANE**
 - C4440 Rev.B (8406883e61b)
 - Nelco 4000-13SI, 22 Layer, 227 mil
- **DAUGHTER CARD**
 - Test-F140 ((6306855G)
 - FR408, 16 Layer, 100mil
 - Trace length ~ 6.2 inch
 - Normal, High and Low Impedance
 - Typical ATCA board topology
 - ZDplus Backplane connector
 - SMA Lunch for TP1 and TP4
 - Receiver AC Capacitors

Longest Link

- **Channel Length**
 - Tx Daughter Card ~ 6.2 inch
 - Backplane ~ 10.5 inch
 - Rx Daughter Card ~ 6.2 inch
- **Thru and Crosstalk Files**
 - Thru_S14-P23-04-AB_S06-P20-10-CD_NNN.s4p
 - FEXT_S14-P23-03-AB_S06-P20-10-CD_NNN.s4p
 - NEXT_S06-P20-09-AB_S06-P20-10-CD_NNN.s4p
 - NEXT_S06-P20-09-EF_S06-P20-10-CD_NNN.s4p
 - NEXT_S06-P20-10-AB_S06-P20-10-CD_NNN.s4p
 - NEXT_S06-P20-10-EF_S06-P20-10-CD_NNN.s4p
- **Additional Thru Files**
 - Thru_S06-P20-10-AB_S14-P23-04-CD_NNN.s4p
 - Thru_S06-P20-10-EF_S14-P23-04-GH_NNN.s4p
 - Thru_S14-P23-04-EF_S06-P20-10-GH_NNN.s4p

Thru_S14-P23-04-AB_S06-P20-10-CD_NNN.s4p

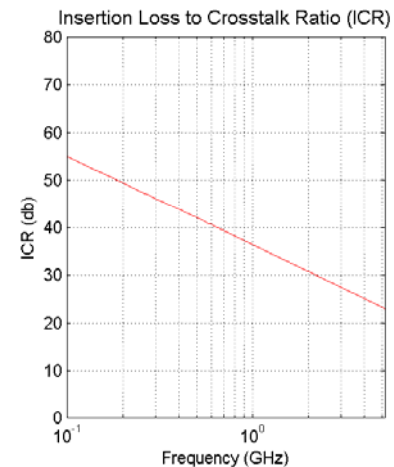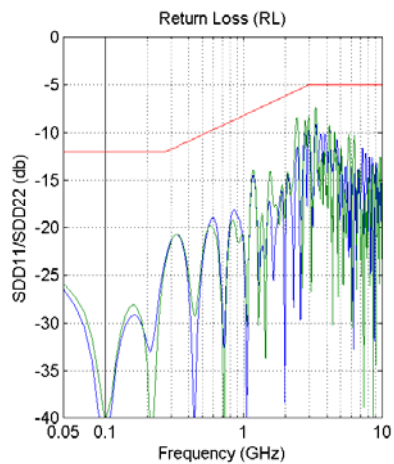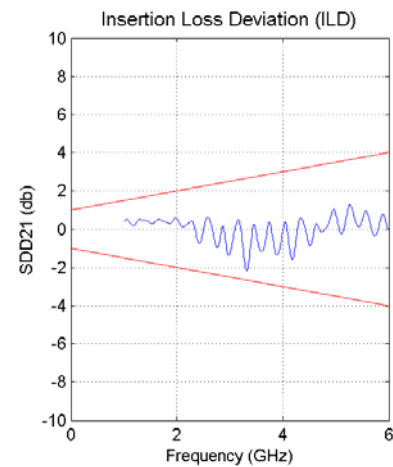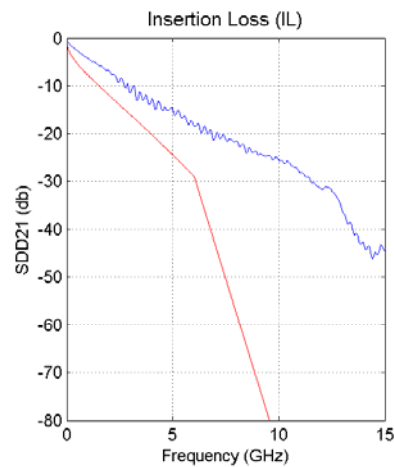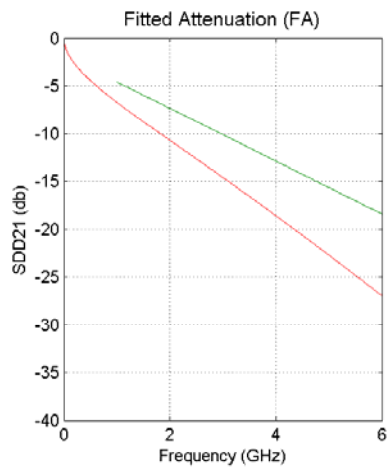

10GBase-KR Compliance Check
according 802.3ap/Draft3.1

Source File:
Thru_S14-P23-04-AB_S06-P20-10-CD_NNN.s4p

Margin:
FA = +2.14
IL = +1.35
ILD = +0.50
RLin = +4.16
RLout = +2.36
ICR = +0.00

Overall Check:
pass


12-Aug-2011

(c) Emerson Network Power GmbH 2011

Middle Link

- **Channel Length**
 - Tx Daughter Card ~ 6.2 inch
 - Backplane 5.1 to 5.6 inch
 - Rx Daughter Card ~ 6.2 inch
- **Thru Files**
 - Thru_S10-P23-04-AB_S06-P22-06-CD_NNN.s4p
 - Thru_S06-P22-06-AB_S10-P23-04-CD_NNN.s4p
 - Thru_S06-P22-06-EF_S10-P23-04-GH_NNN.s4p
 - Thru_S10-P23-04-EF_S06-P22-06-GH_NNN.s4p

Thru_S10-P23-04-AB_S06-P22-06-CD_NNN.s4p





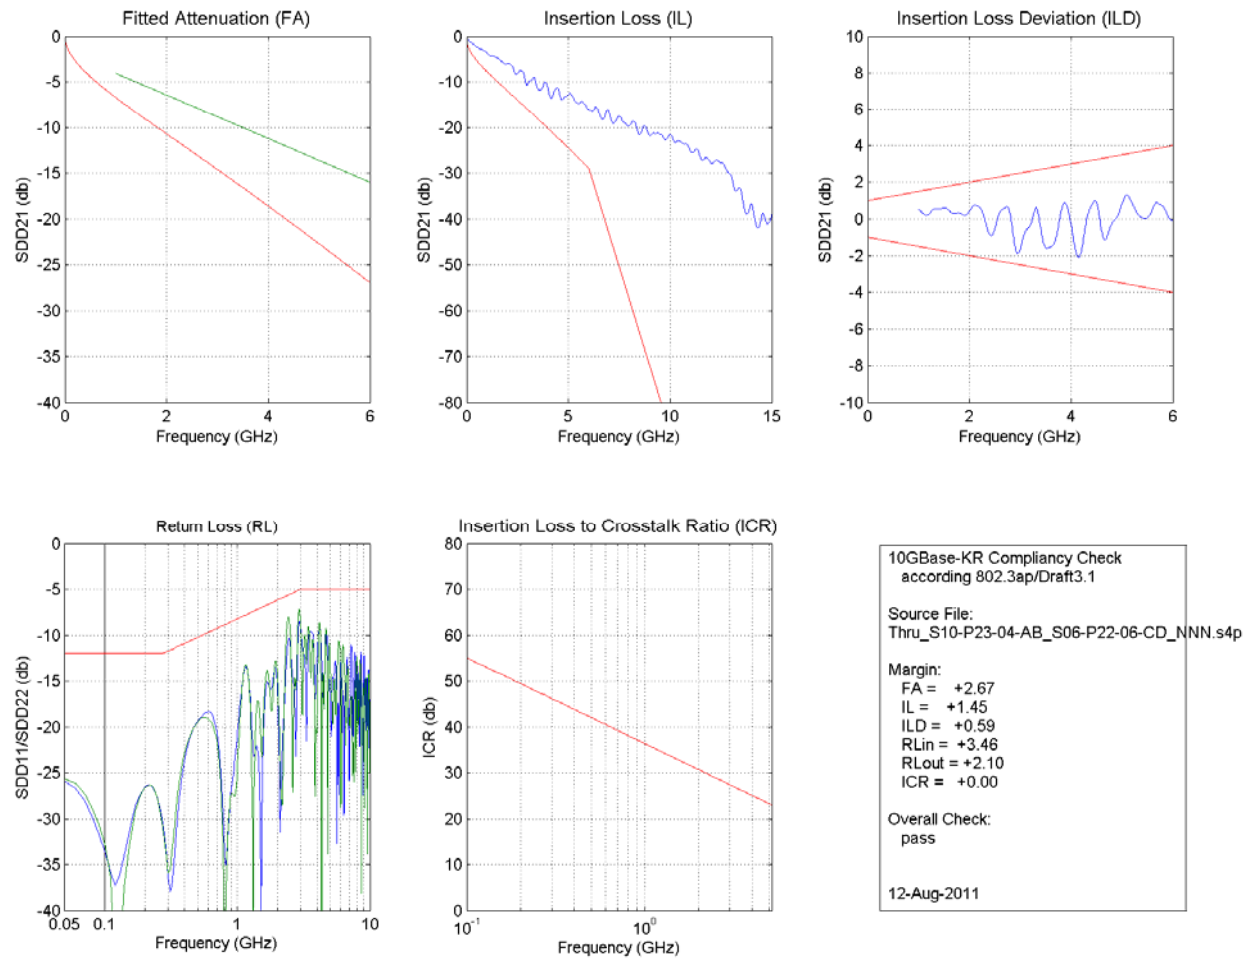


(c) Emerson Network Power GmbH 2011

Shortest Link

- **Channel Length**
 - Tx Daughter Card ~ 6.2 inch
 - Backplane 2.6 to 3.0 inch
 - Rx Daughter Card ~ 6.2 inch
- **Thru and Crosstalk Files**
 - Thru_S07-P23-02-AB_S09-P23-02-CD_NNN.s4p
 - FEXT_S07-P23-01-AB_S09-P23-02-CD_NNN.s4p
 - NEXT_S09-P23-01-AB_S09-P23-02-CD_NNN.s4p
 - NEXT_S09-P23-01-EF_S09-P23-02-CD_NNN.s4p
 - NEXT_S09-P23-02-AB_S09-P23-02-CD_NNN.s4p
 - NEXT_S09-P23-02-EF_S09-P23-02-CD_NNN.s4p
- **Additional Thru Files**
 - Thru_S09-P23-02-AB_S07-P23-02-CD_NNN.s4p
 - Thru_S09-P23-02-EF_S07-P23-02-GH_NNN.s4p
 - Thru_S07-P23-02-EF_S09-P23-02-GH_NNN.s4p

Thru_S07-P23-02-AB_S09-P23-02-CD_NNN.s4p

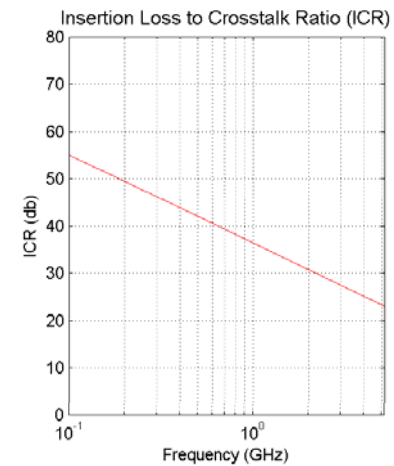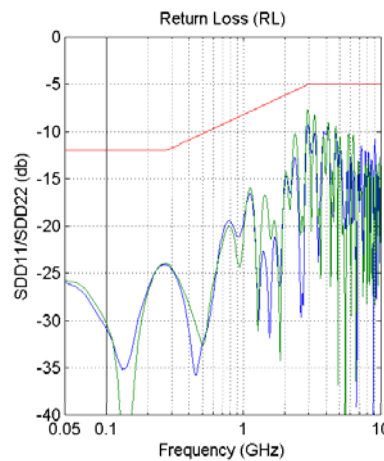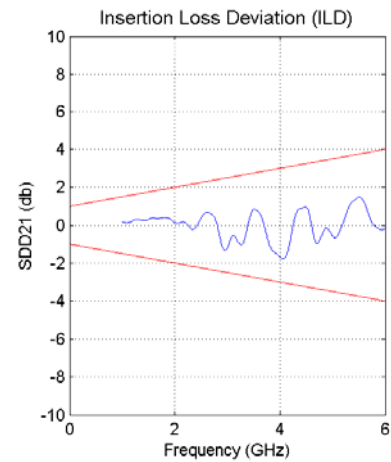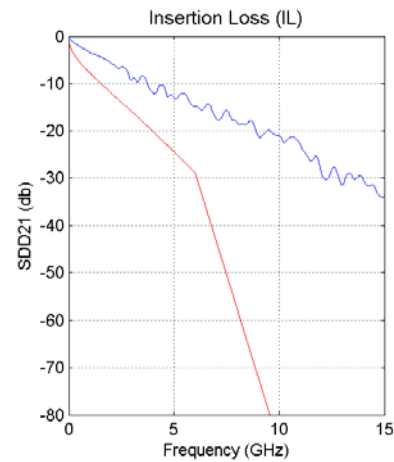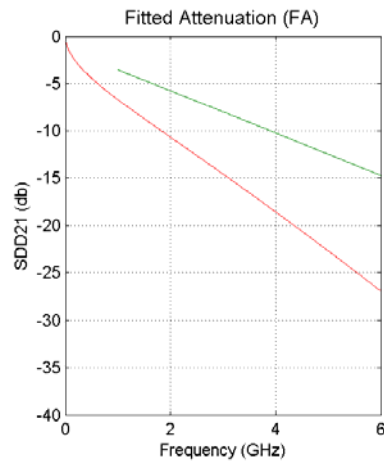

10GBase-KR Compliance Check
according 802.3ap/Draft3.1

Source File:
Thru_S07-P23-02-AB_S09-P23-02-CD_NNN.s4p

Margin:
FA = +3.19
IL = +1.48
ILD = +1.14
RLin = +4.29
RLout = +2.64
ICR = +0.00

Overall Check:
pass

12-Aug-2011

(c) Emerson Network Power GmbH 2011